



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 310E 1DW310EXTKF697898

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211658	JR0135952	JR0110282
Sample Date		Client Info		28 May 2024	01 Sep 2022	04 Mar 2022
Machine Age	hrs	Client Info		4359	3515	2957
Oil Age	hrs	Client Info		4359	558	420
Filter Age	hrs	Client Info		4359	558	420
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR

Cylinder, crank, or cam shaft wear is indicated.

Iron	ppm	ASTM D5185m	>51	▲ 71	54	▲ 80
Chromium	ppm	ASTM D5185m	>11	1	<1	1
Nickel	ppm	ASTM D5185m	>5	2	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>31	8	7	8
Lead	ppm	ASTM D5185m	>26	2	2	<1
Copper	ppm	ASTM D5185m	>26	24	9	3
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	8	9	10
Potassium	ppm	ASTM D5185m	>20	2	4	3
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.1	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	23.2	23.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	4	0	2
Boron	ppm	ASTM D5185m		185	257	222
Barium	ppm	ASTM D5185m		<1	3	0
Molybdenum	ppm	ASTM D5185m		247	295	287
Manganese	ppm	ASTM D5185m		2	1	1
Magnesium	ppm	ASTM D5185m		767	857	933
Calcium	ppm	ASTM D5185m		1501	1618	1701
Phosphorus	ppm	ASTM D5185m		894	1032	1078
Zinc	ppm	ASTM D5185m		1025	1213	1285
Sulfur	ppm	ASTM D5185m		3108	3218	3333
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	16.7	16.8
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.7	9.9	10.0
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	13.6	13.8


▲ Ferrous Alloys

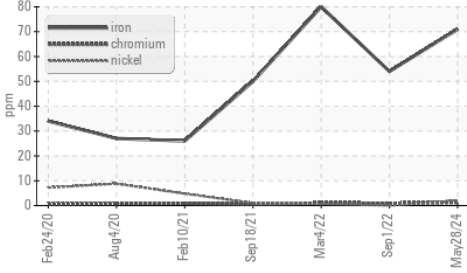


▲ Ferrous Alloys

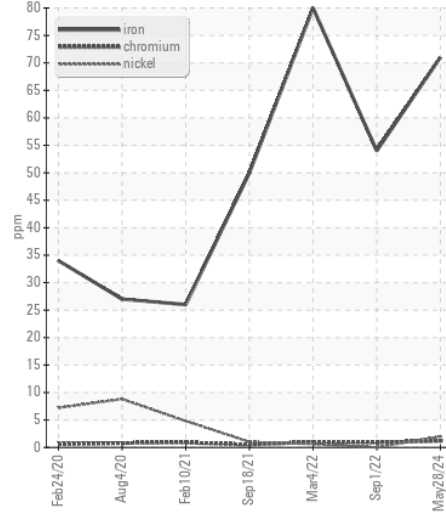


FT-IR (Direct Trend)

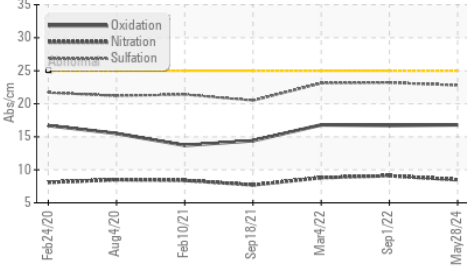


Base Number

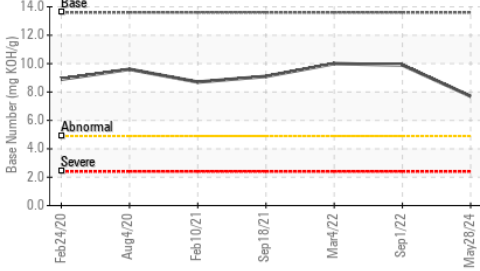


Non-ferrous Metals

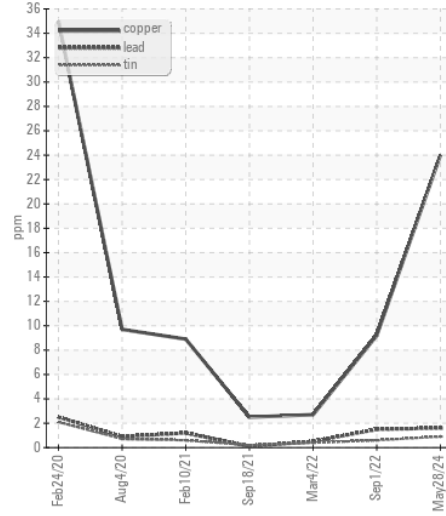


Viscosity @ 100°C

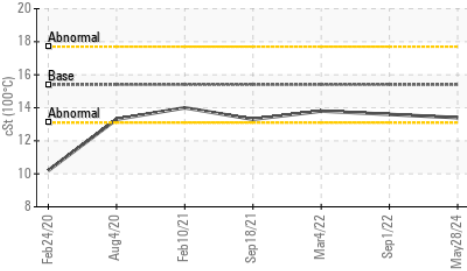

Viscosity @ 100°C

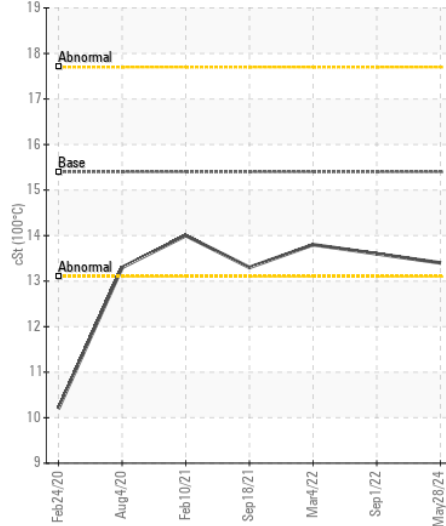

Base Number

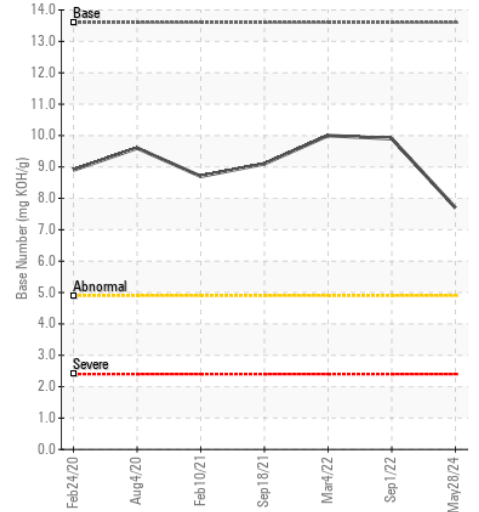

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211658 **Received** : 29 May 2024
Lab Number : 06194765 **Tested** : 30 May 2024
Unique Number : 11056888 **Diagnosed** : 31 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292