



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**SAR**  
Machine Id  
Component  
**SAR**  
Center Main Engine  
Fluid  
**CHEVRON DELO 710 LS (350 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0060922</b>	MW0050827	MW0050838
Sample Date		Client Info		<b>10 May 2024</b>	22 Aug 2023	04 Jul 2023
Machine Age	hrs	Client Info		<b>111988</b>	108191	14010
Oil Age	hrs	Client Info		<b>7648</b>	6761	14010
Filter Age	hrs	Client Info		<b>1050</b>	1267	1247
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>10</b>	23	22
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	0	2
Lead	ppm	ASTM D5185m	>18	<b>3</b>	3	4
Copper	ppm	ASTM D5185m	>80	<b>8</b>	9	12
Tin	ppm	ASTM D5185m	>14	<b>5</b>	9	5
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>3</b>	5	8
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	8.1	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.4</b>	16.7	17.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>1</b>	9	41
Boron	ppm	ASTM D5185m		<b>39</b>	54	62
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>44</b>	49	48
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>9</b>	19	14
Calcium	ppm	ASTM D5185m		<b>3450</b>	3836	3500
Phosphorus	ppm	ASTM D5185m		<b>2</b>	10	4
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>2400</b>	2736	2522
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>9.5</b>	9.5	9.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>6.3</b>	6.7	7.2
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.7</b>	14.9	14.8


**FT-IR (Direct Trend)**

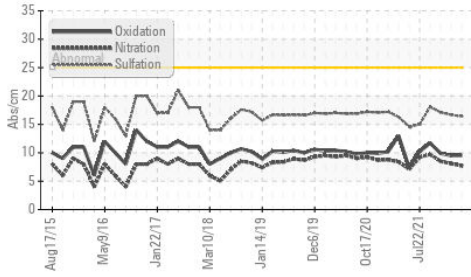


**Base Number**

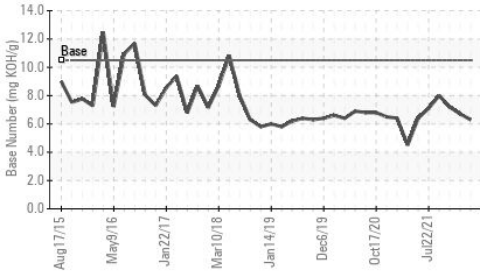

**Viscosity @ 100°C**

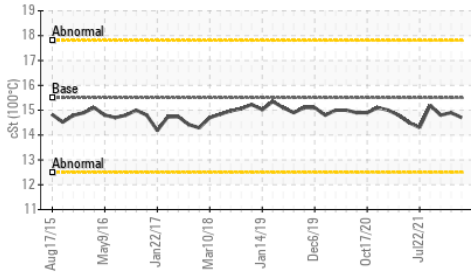


**Ferrous Alloys**

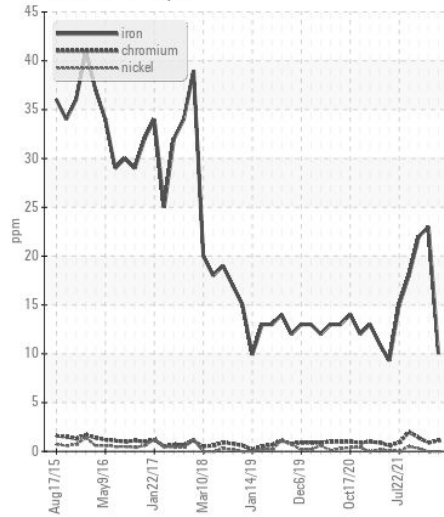


**Non-ferrous Metals**



**Viscosity @ 100°C**

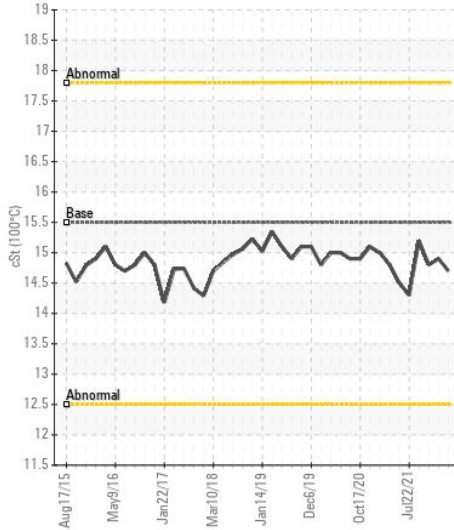

**Base Number**

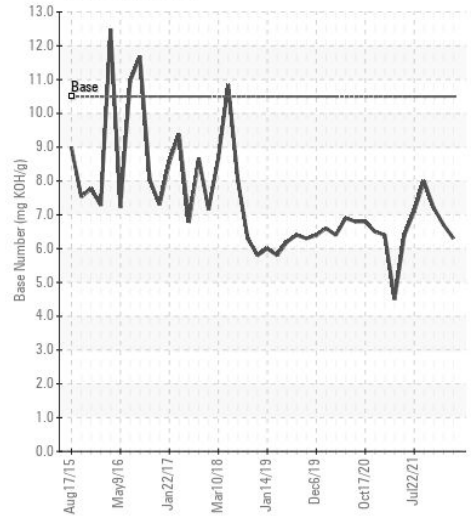

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0060922  
**Lab Number** : 06194792  
**Unique Number** : 11056915  
**Test Package** : MAR 2

**Received** : 29 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Wes Davis

**AMERICAN RIVER TRANSPORTATION CO.**  
 P.O. BOX 2889  
 ST. LOUIS, MO  
 US 63111  
 Contact: BRIAN GRIEWING  
 brian.griewing@adm.com  
 T:  
 F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)