



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
T-29
 Component
Diesel Engine
 Fluid
CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0920346	WC0869322	WC0794446
Sample Date		Client Info		21 May 2024	11 Nov 2023	26 Jun 2023
Machine Age	mls	Client Info		335193	318162	302446
Oil Age	mls	Client Info		17031	15716	302446
Filter Age	mls	Client Info		17031	15716	18376
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	30	18	20
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		93	89	90
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	5	6	4
Lead	ppm	ASTM D5185m	>40	5	2	<1
Copper	ppm	ASTM D5185m	>330	<1	1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		1	1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	8	8	6
Potassium	ppm	ASTM D5185m	>20	5	4	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	10.6	10.2	10.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.9	25.4	25.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	9	5
Boron	ppm	ASTM D5185m	85	24	33	39
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	4	4
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	350	430	455	464
Calcium	ppm	ASTM D5185m	1800	1981	1820	1903
Phosphorus	ppm	ASTM D5185m	1000	1076	973	1035
Zinc	ppm	ASTM D5185m	1100	1231	1267	1294
Sulfur	ppm	ASTM D5185m	3500	4221	3662	4459
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.7	20.2	20.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	5.2	6.0	6.4
Visc @ 100°C	cSt	ASTM D445	15.3	14.8	14.8	14.6


FT-IR (Direct Trend)

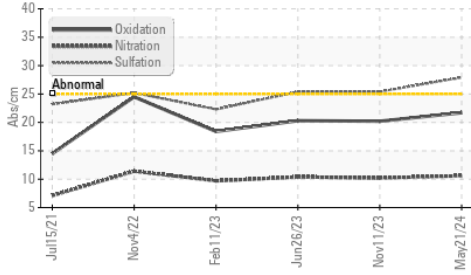


Ferrous Alloys

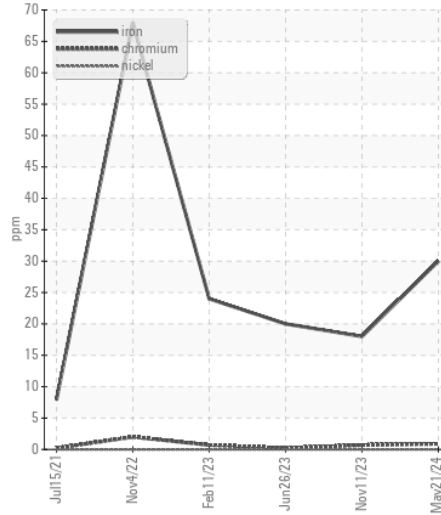


Base Number

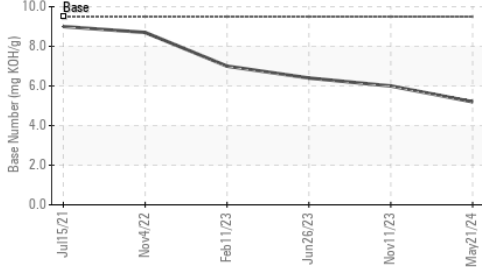


Non-ferrous Metals

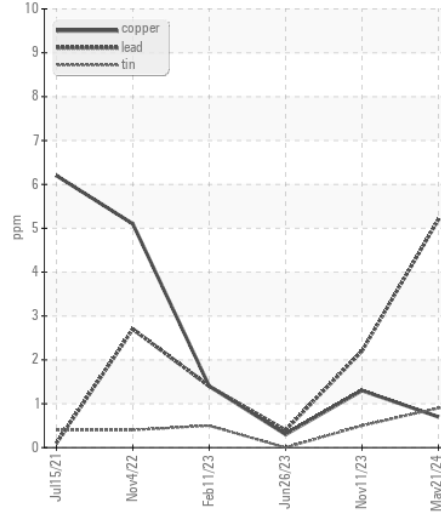


Viscosity @ 100°C

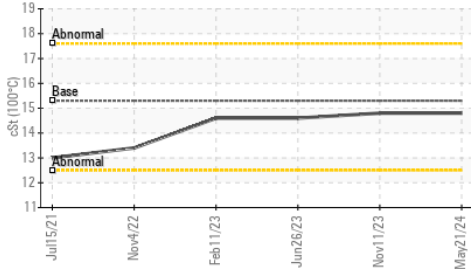

Viscosity @ 100°C

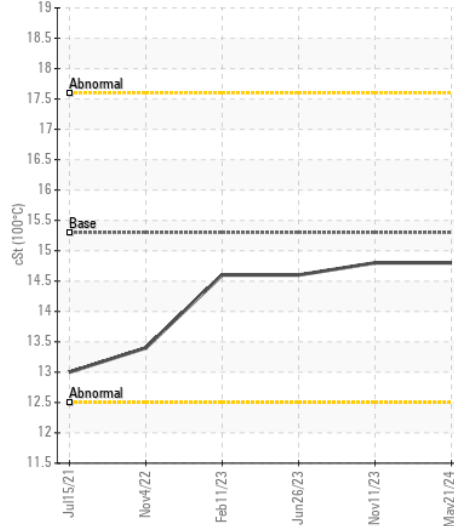

Base Number

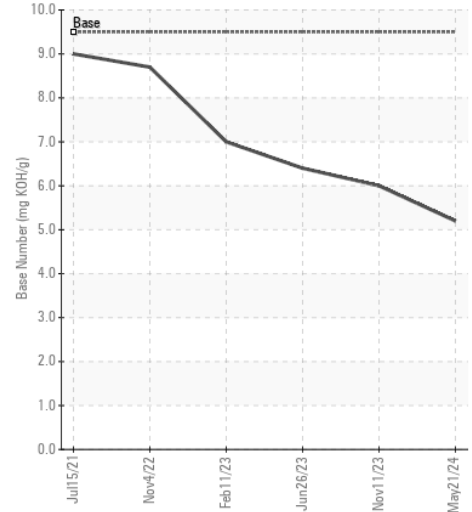

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0920346 **Received** : 29 May 2024
Lab Number : 06194808 **Tested** : 30 May 2024
Unique Number : 11056931 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

FRANKLIN IRON & METAL CORP
 1939 EAST 1ST ST
 DAYTON, OH
 US 45403
 Contact: BILL PITTL JR
 parts@frankliniron.com
 T: (937)253-8184
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)