



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>MARGINAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Machine Id  
**11115**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)**

### RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0913894</b>	---	---
Sample Date		Client Info		<b>10 Apr 2024</b>	---	---
Machine Age	mls	Client Info		<b>7773</b>	---	---
Oil Age	mls	Client Info		<b>7773</b>	---	---
Filter Age	mls	Client Info		<b>7773</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>100	<b>22</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










Light fuel dilution occurring.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Fuel	%	ASTM D3524	>5	<b>▲ 3.5</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>1.9</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.2</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	---	---
Boron	ppm	ASTM D5185m	151	<b>● 7</b>	---	---
Barium	ppm	ASTM D5185m	0.4	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	250	<b>70</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	0	<b>851</b>	---	---
Calcium	ppm	ASTM D5185m	2046	<b>● 1115</b>	---	---
Phosphorus	ppm	ASTM D5185m	1043	<b>989</b>	---	---
Zinc	ppm	ASTM D5185m	943	<b>1109</b>	---	---
Sulfur	ppm	ASTM D5185m	5012	<b>3217</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	<b>8.6</b>	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>▲ 11.7</b>	---	---

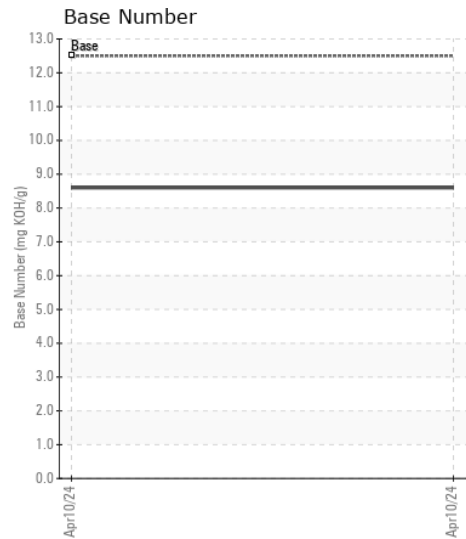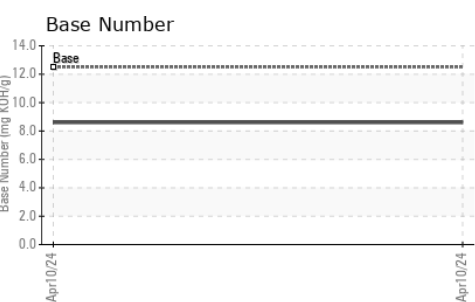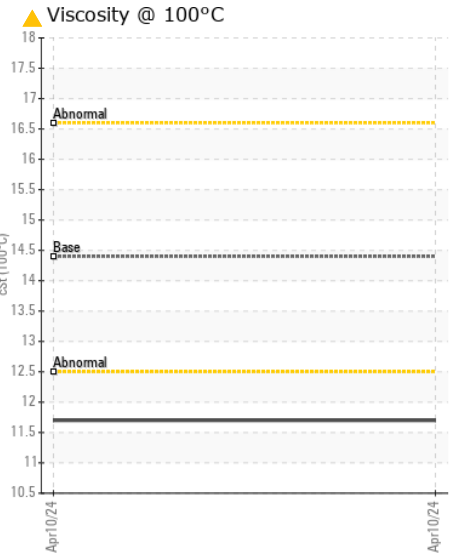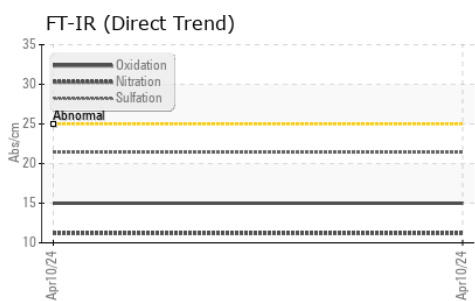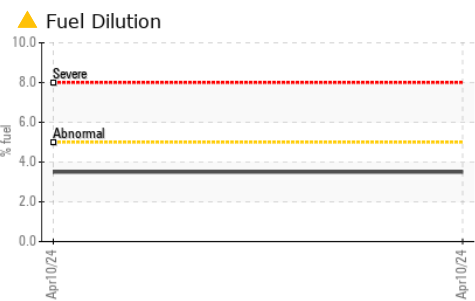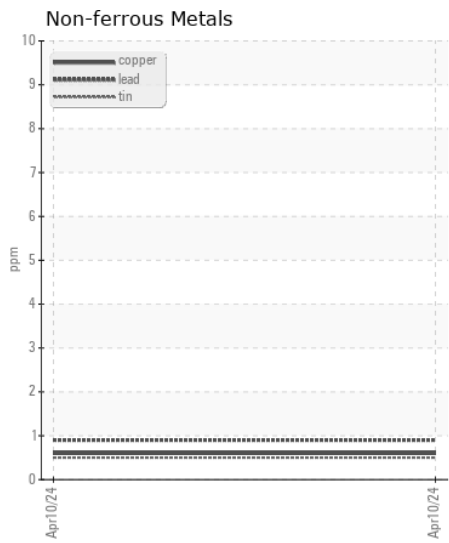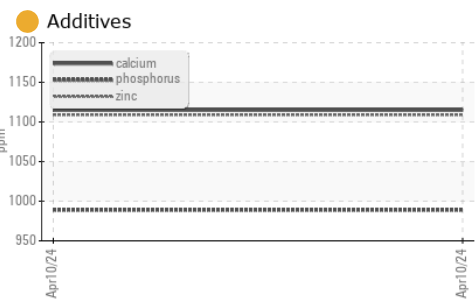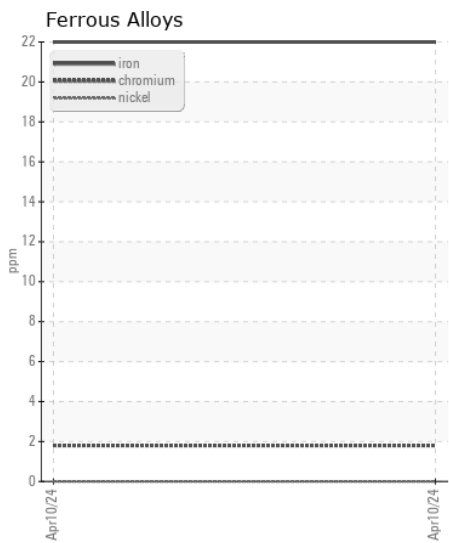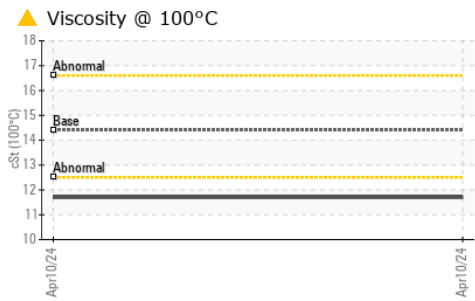

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0913894 **Received** : 29 May 2024  
**Lab Number** : 06194887 **Tested** : 03 Jun 2024  
**Unique Number** : 11057010 **Diagnosed** : 03 Jun 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105  
 Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com  
 T: (336)767-9642  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)