



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
EMD MISS KATHY
Component
Starboard Main Engine
Fluid
CHEVRON DELO 710 LE (260 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0061908	MW0044123	MW0044119
Sample Date		Client Info		07 May 2024	22 Mar 2024	01 Feb 2024
Machine Age	hrs	Client Info		7415	6322	5543
Oil Age	hrs	Client Info		1882	783	2832
Filter Age	hrs	Client Info		449	783	1412
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	11	6	11
Chromium	ppm	ASTM D5185m	>8	1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>15	2	2	1
Lead	ppm	ASTM D5185m	>18	3	2	3
Copper	ppm	ASTM D5185m	>80	10	5	12
Tin	ppm	ASTM D5185m	>14	6	3	6
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	3	3
Potassium	ppm	ASTM D5185m	>20	<1	3	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.5	6.2	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.4	14.1	15.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	1	1	<1
Boron	ppm	ASTM D5185m		40	41	36
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		43	43	40
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		12	12	14
Calcium	ppm	ASTM D5185m		3384	3326	3162
Phosphorus	ppm	ASTM D5185m		12	25	6
Zinc	ppm	ASTM D5185m	10	8	28	2
Sulfur	ppm	ASTM D5185m		2421	2457	2135
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.1	7.1	8.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	6.5	6.2	6.5
Visc @ 100°C	cSt	ASTM D445	15.5	14.0	14.4	14.0

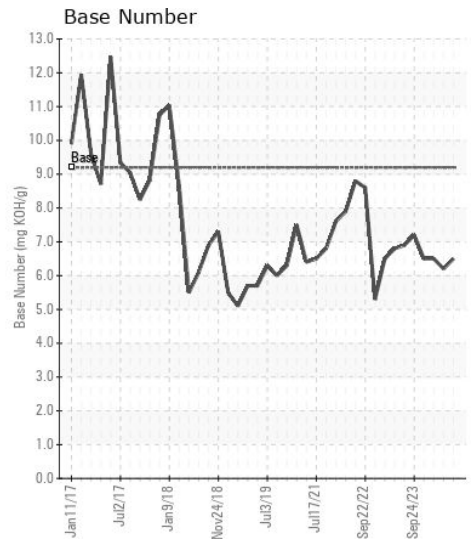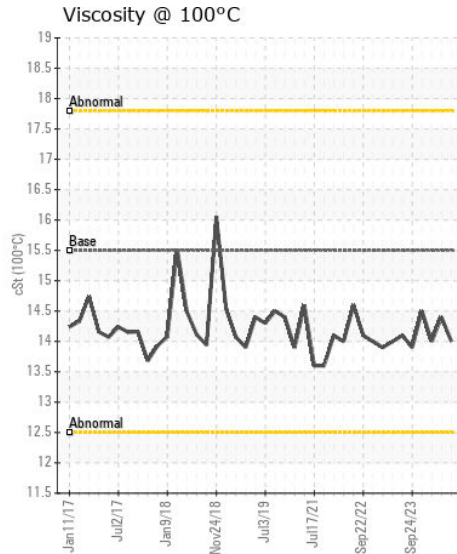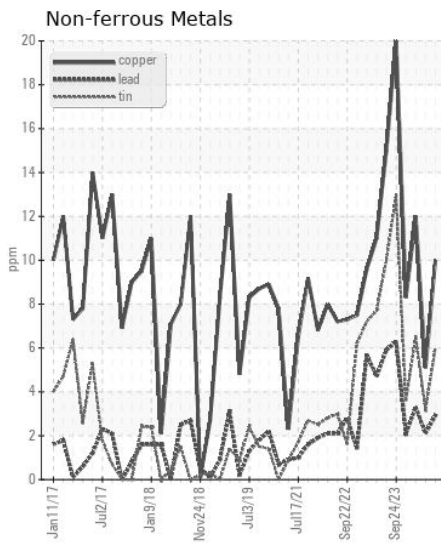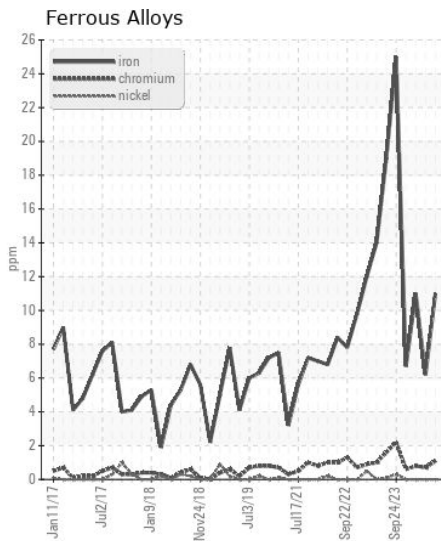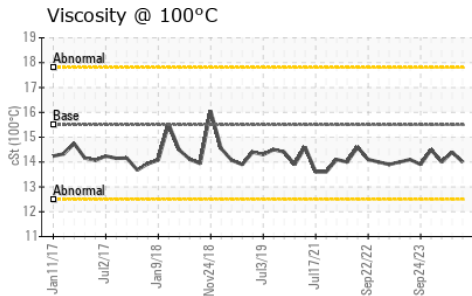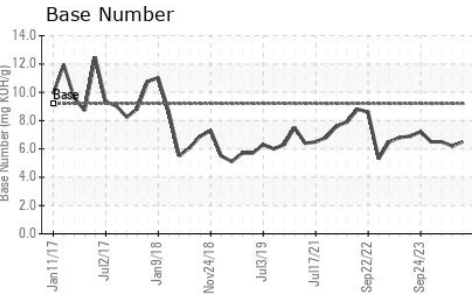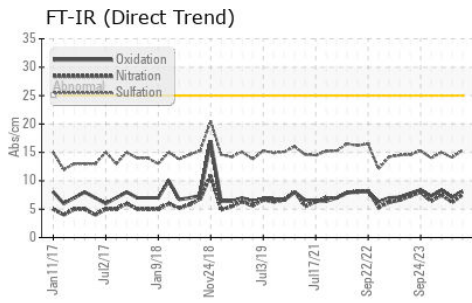

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0061908
Lab Number : 06194891
Unique Number : 11057014
Test Package : MAR 2
Received : 29 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Wes Davis

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: x: F: (601)638-8028