



Machine Id  
**426138 - SW4614**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: Engine )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0123567</b>	GFL0105519	GFL0075343
Sample Date		Client Info		<b>23 May 2024</b>	18 Jan 2024	20 May 2023
Machine Age	mls	Client Info		<b>287726</b>	277220	271072
Oil Age	mls	Client Info		<b>287726</b>	277220	263966
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>ABNORMAL</b>	SEVERE	NORMAL

**WEAR**

Cylinder, crank, or cam shaft wear is indicated.

Iron	ppm	ASTM D5185m	>100	<b>▲ 137</b>	▲ 169	26
Chromium	ppm	ASTM D5185m	>20	<b>7</b>	▲ 16	1
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	2	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>● 9</b>	● 15	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	3	2
Copper	ppm	ASTM D5185m	>330	<b>125</b>	11	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>25	<b>▲ 38</b>	▲ 84	9
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	6	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	0.6	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1.7</b>	0.7	1.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.4</b>	7.7	11.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	24.6	22.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	0	<1
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	58	<1
Barium	ppm	ASTM D5185m	0	<b>3</b>	14	0
Molybdenum	ppm	ASTM D5185m	60	<b>58</b>	50	40
Manganese	ppm	ASTM D5185m	0	<b>2</b>	6	<1
Magnesium	ppm	ASTM D5185m	1010	<b>48</b>	450	128
Calcium	ppm	ASTM D5185m	1070	<b>2487</b>	1730	2844
Phosphorus	ppm	ASTM D5185m	1150	<b>1140</b>	1044	1078
Zinc	ppm	ASTM D5185m	1270	<b>1240</b>	1283	1359
Sulfur	ppm	ASTM D5185m	2060	<b>2929</b>	3335	3719
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.8</b>	21.1	13.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.4</b>	11.1	8.5
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	● 10.8	14.0

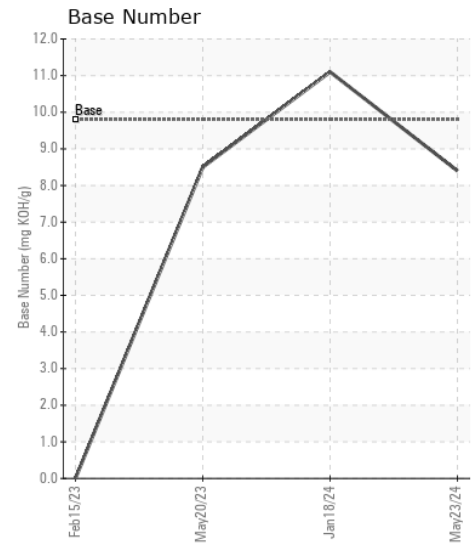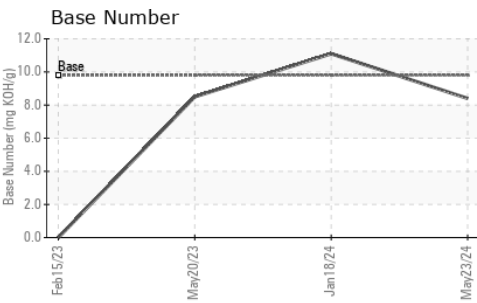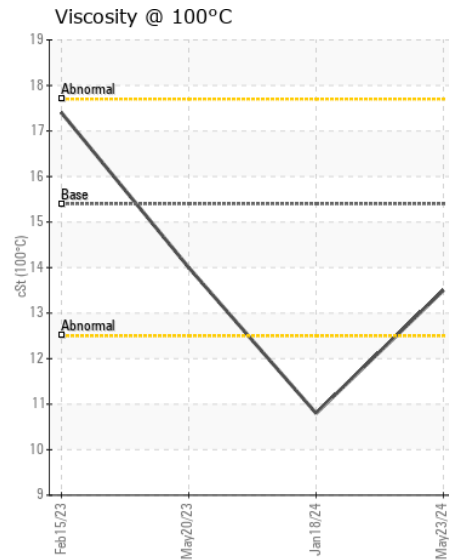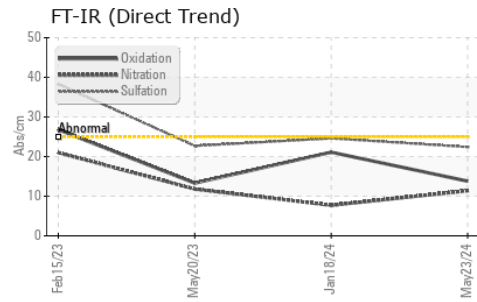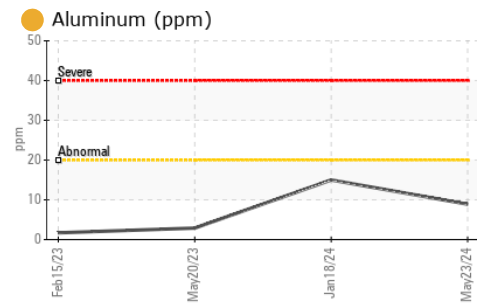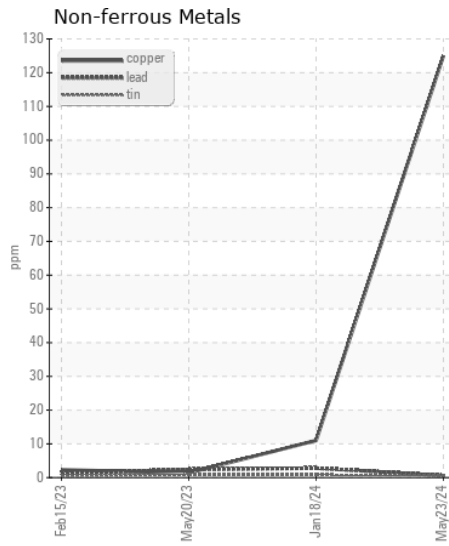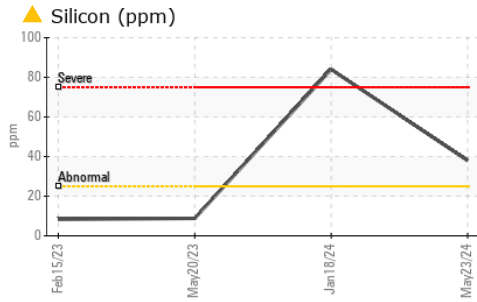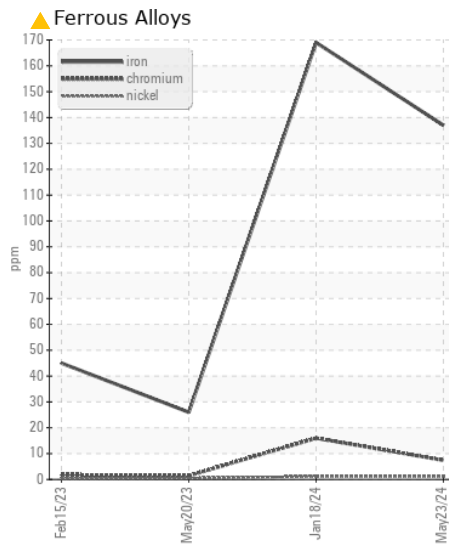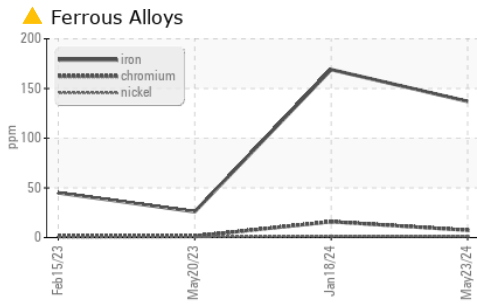

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123567  
**Lab Number** : 06194998  
**Unique Number** : 11057121  
**Test Package** : FLEET

**Received** : 30 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 31 May 2024 - Don Baldrige

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498

Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: