



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2617C**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (12 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0118402</b>	GFL0112949	GFL0079623
Sample Date		Client Info		<b>30 May 2024</b>	13 Mar 2024	22 Feb 2024
Machine Age	hrs	Client Info		<b>11218</b>	11218	11218
Oil Age	hrs	Client Info		<b>438</b>	168	579
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>7</b>	4	9
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	>30	<b>1</b>	<1	0
Copper	ppm	ASTM D5185m	>35	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	<b>4</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>16</b>	<1	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	8.2	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.1</b>	19.8	21.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>8</b>	4	5
Boron	ppm	ASTM D5185m	50	<b>17</b>	30	13
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	8
Molybdenum	ppm	ASTM D5185m	50	<b>51</b>	46	50
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	560	<b>594</b>	560	498
Calcium	ppm	ASTM D5185m	1510	<b>1757</b>	1481	1378
Phosphorus	ppm	ASTM D5185m	780	<b>861</b>	789	718
Zinc	ppm	ASTM D5185m	870	<b>1022</b>	899	880
Sulfur	ppm	ASTM D5185m	2040	<b>3071</b>	2698	2501
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.1</b>	16.7	17.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>5.9</b>	7.3	5.4
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.6</b>	14.4	14.4

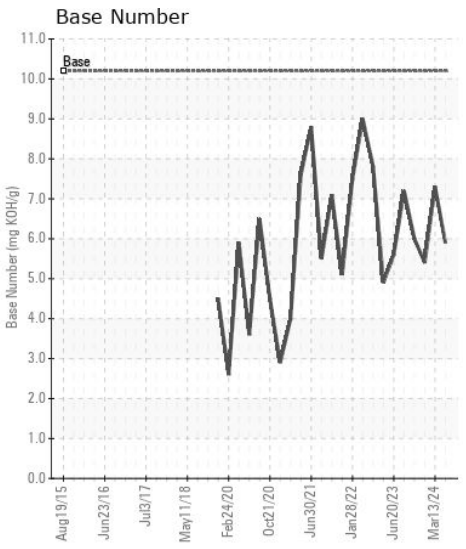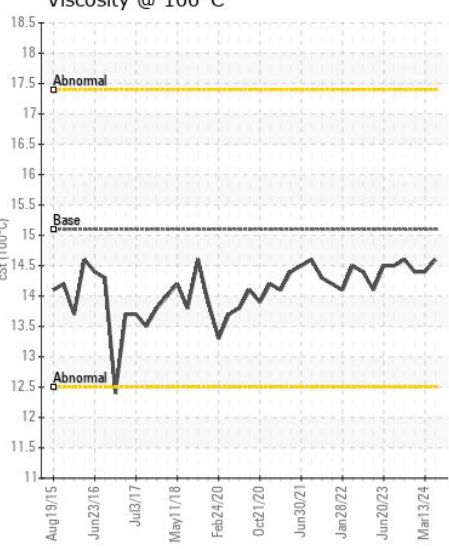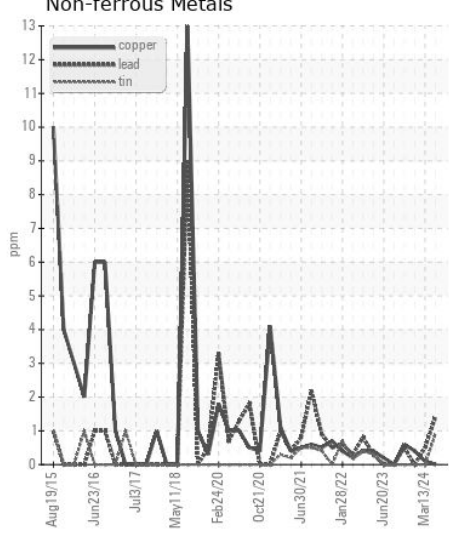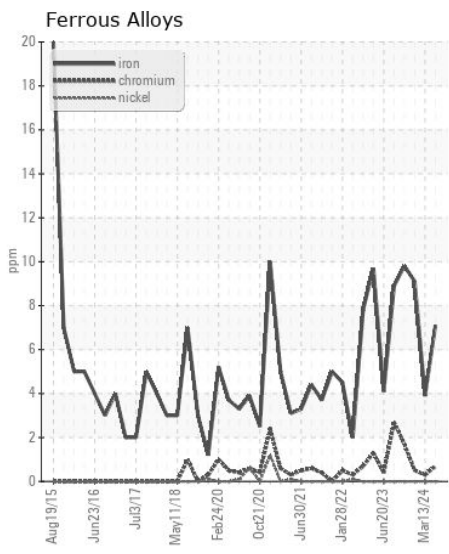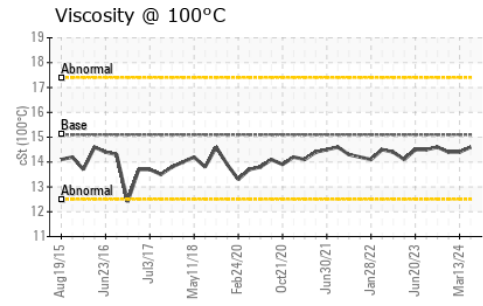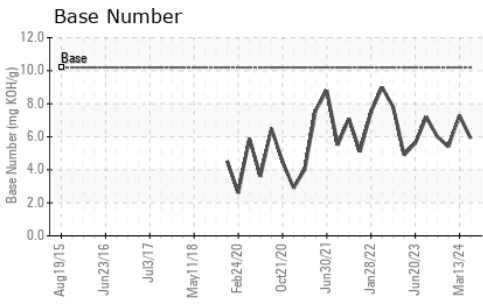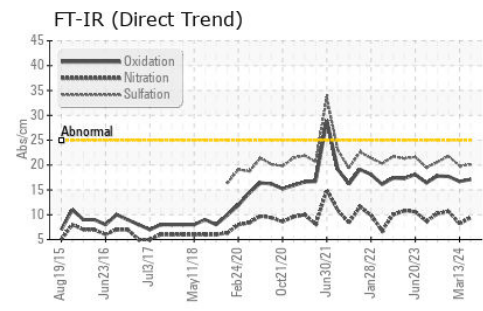

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118402  
**Lab Number** : 06195101  
**Unique Number** : 11057224  
**Test Package** : FLEET

**GFL Environmental - 017 - Durham**  
 148 Stone Park Court  
 Durham, NC  
 US 27703  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

bill.waring@wearcheck.com  
 T: (919)596-1363  
 F: (919)598-1852