



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**(YA117961)**

Machine Id

**10550C**

Component

**Natural Gas Engine**

Fluid

**PETRO CANADA DURON GEO LD 15W40 (28 QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0118399</b>	GFL0098137	GFL0088544
Sample Date		Client Info		<b>30 May 2024</b>	23 Jan 2024	13 Sep 2023
Machine Age	hrs	Client Info		<b>9544</b>	9544	9544
Oil Age	hrs	Client Info		<b>248</b>	394	348
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>13</b>	11	9
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m	>30	<b>2</b>	<1	<1
Copper	ppm	ASTM D5185m	>35	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	<b>5</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	9.5	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.3</b>	19.9	20.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>8</b>	9	7
Boron	ppm	ASTM D5185m	50	<b>17</b>	16	16
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>53</b>	52	56
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	560	<b>618</b>	611	630
Calcium	ppm	ASTM D5185m	1510	<b>1854</b>	1659	1784
Phosphorus	ppm	ASTM D5185m	780	<b>880</b>	782	793
Zinc	ppm	ASTM D5185m	870	<b>1062</b>	1019	1020
Sulfur	ppm	ASTM D5185m	2040	<b>3069</b>	2476	2970
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	16.9	17.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>6.4</b>	6.4	6.6
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.4</b>	14.4	14.8

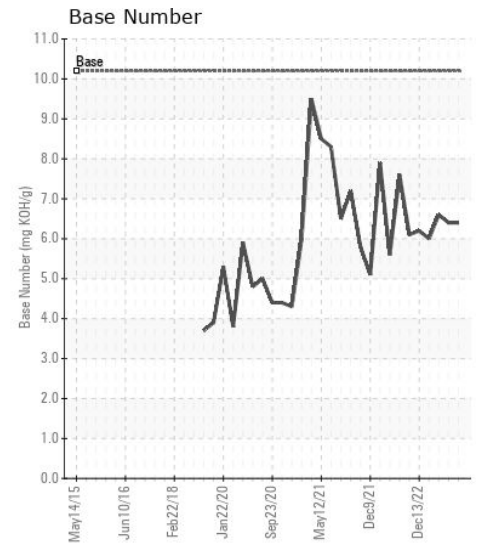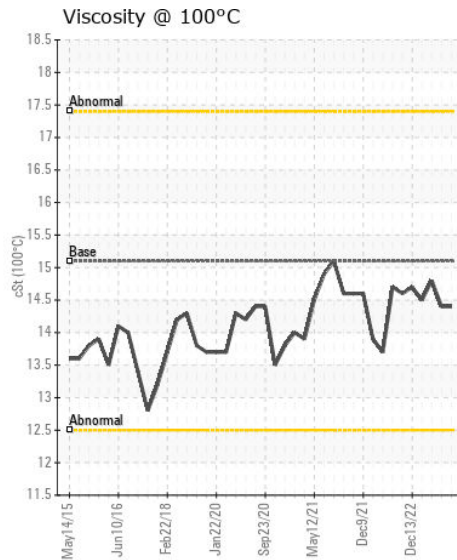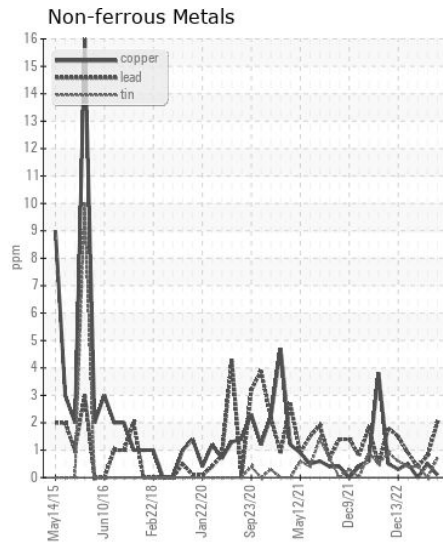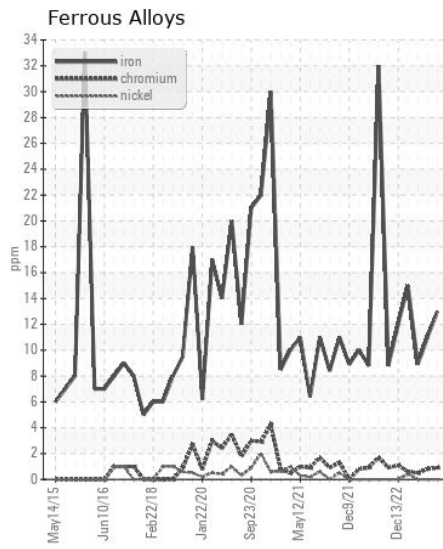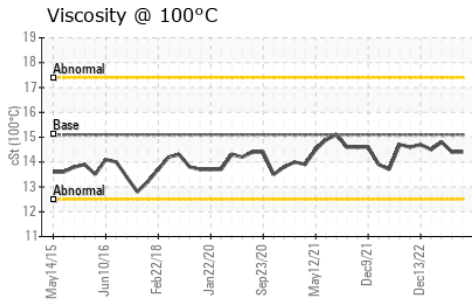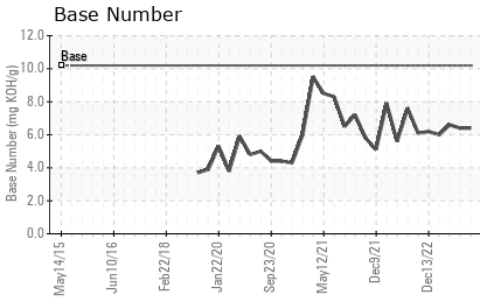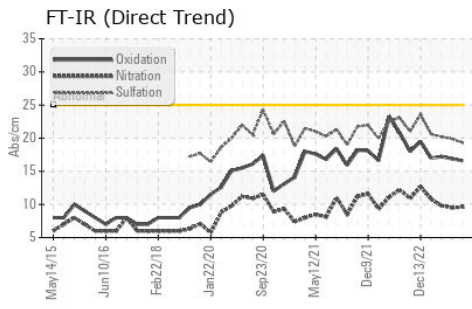

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118399  
**Lab Number** : 06195105  
**Unique Number** : 11057228  
**Test Package** : FLEET

**Received** : 30 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 31 May 2024 - Wes Davis

**GFL Environmental - 017 - Durham**  
 148 Stone Park Court  
 Durham, NC  
 US 27703  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

bill.waring@wearcheck.com

T: (919)596-1363

F: (919)598-1852