



# OIL ANALYSIS REPORT

|                 |                 |
|-----------------|-----------------|
| WEAR            | <b>NORMAL</b>   |
| CONTAMINATION   | <b>SEVERE</b>   |
| FLUID CONDITION | <b>ABNORMAL</b> |

Machine Id  
**1498**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

## WEAR

All component wear rates are normal.













## CONTAMINATION

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

| Test             | UOM      | Method      | Limit/Abn | Current            | History1     | History2      |
|------------------|----------|-------------|-----------|--------------------|--------------|---------------|
| Sample Number    |          | Client Info |           | <b>WC0932891</b>   | WC0821361    | WC0761288     |
| Sample Date      |          | Client Info |           | <b>17 Apr 2024</b> | 22 Jun 2023  | 14 Dec 2022   |
| Machine Age      | mls      | Client Info |           | <b>244144</b>      | 229940       | 219160        |
| Oil Age          | mls      | Client Info |           | <b>0</b>           | 0            | 0             |
| Filter Age       | mls      | Client Info |           | <b>0</b>           | 0            | 0             |
| Oil Changed      |          | Client Info |           | <b>Not Changd</b>  | Not Changd   | Not Changd    |
| Filter Changed   |          | Client Info |           | <b>Not Changd</b>  | Not Changd   | Not Changd    |
| Sample Status    |          |             |           | <b>SEVERE</b>      | MARGINAL     | SEVERE        |
| Iron             | ppm      | ASTM D5185m | >100      | <b>28</b>          | 21           | 22            |
| Chromium         | ppm      | ASTM D5185m | >20       | <b>1</b>           | 3            | 1             |
| Nickel           | ppm      | ASTM D5185m | >4        | <b>0</b>           | 0            | <1            |
| Titanium         | ppm      | ASTM D5185m |           | <b>0</b>           | 0            | 0             |
| Silver           | ppm      | ASTM D5185m | >3        | <b>0</b>           | 0            | 0             |
| Aluminum         | ppm      | ASTM D5185m | >20       | <b>11</b>          | 7            | 4             |
| Lead             | ppm      | ASTM D5185m | >40       | <b>0</b>           | 0            | <1            |
| Copper           | ppm      | ASTM D5185m | >330      | <b>0</b>           | <1           | <1            |
| Tin              | ppm      | ASTM D5185m | >15       | <b>0</b>           | 0            | <1            |
| Vanadium         | ppm      | ASTM D5185m |           | <b>0</b>           | 0            | <1            |
| White Metal      | scalar   | *Visual     | NONE      | <b>NONE</b>        | NONE         | NONE          |
| Yellow Metal     | scalar   | *Visual     | NONE      | <b>NONE</b>        | NONE         | NONE          |
| Silicon          | ppm      | ASTM D5185m | >25       | <b>4</b>           | 9            | 5             |
| Potassium        | ppm      | ASTM D5185m | >20       | <b>4</b>           | 4            | 2             |
| Fuel             | %        | ASTM D3524  | >5        | <b>▲ 12.4</b>      | <b>▲ 3.0</b> | <b>▲ 20.9</b> |
| Water            |          | WC Method   | >0.2      | <b>NEG</b>         | NEG          | NEG           |
| Glycol           |          | WC Method   |           | <b>NEG</b>         | NEG          | NEG           |
| Soot %           | %        | *ASTM D7844 | >3        | <b>0.9</b>         | 0.8          | 0.8           |
| Nitration        | Abs/cm   | *ASTM D7624 | >20       | <b>10.7</b>        | 10.2         | 11.3          |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30       | <b>19.6</b>        | 20.2         | 22.2          |
| Silt             | scalar   | *Visual     | NONE      | <b>NONE</b>        | NONE         | NONE          |
| Debris           | scalar   | *Visual     | NONE      | <b>NONE</b>        | NONE         | NONE          |
| Sand/Dirt        | scalar   | *Visual     | NONE      | <b>NONE</b>        | NONE         | NONE          |
| Appearance       | scalar   | *Visual     | NORML     | <b>NORML</b>       | NORML        | NORML         |
| Odor             | scalar   | *Visual     | NORML     | <b>NORML</b>       | NORML        | NORML         |
| Emulsified Water | scalar   | *Visual     | >0.2      | <b>NEG</b>         | NEG          | NEG           |
| Sodium           | ppm      | ASTM D5185m | >158      | <b>2</b>           | 2            | 2             |
| Boron            | ppm      | ASTM D5185m | 250       | <b>36</b>          | 27           | 10            |
| Barium           | ppm      | ASTM D5185m | 10        | <b>0</b>           | 0            | 1             |
| Molybdenum       | ppm      | ASTM D5185m | 100       | <b>67</b>          | 79           | 40            |
| Manganese        | ppm      | ASTM D5185m |           | <b>0</b>           | <1           | <1            |
| Magnesium        | ppm      | ASTM D5185m | 450       | <b>82</b>          | 184          | 77            |
| Calcium          | ppm      | ASTM D5185m | 3000      | <b>1624</b>        | 2183         | 1647          |
| Phosphorus       | ppm      | ASTM D5185m | 1150      | <b>810</b>         | 1046         | 698           |
| Zinc             | ppm      | ASTM D5185m | 1350      | <b>942</b>         | 1275         | 895           |
| Sulfur           | ppm      | ASTM D5185m | 4250      | <b>3190</b>        | 4356         | 3038          |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25       | <b>15.7</b>        | 16.2         | 19.3          |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 8.5       | <b>7.0</b>         | 8.4          | 5.6           |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.4      | <b>▲ 11.0</b>      | 13.4         | <b>▲ 8.9</b>  |

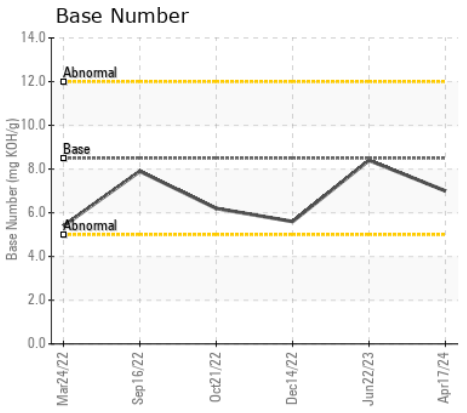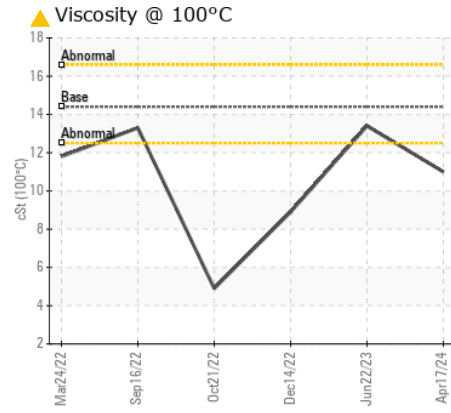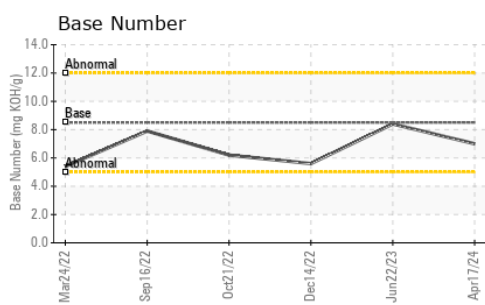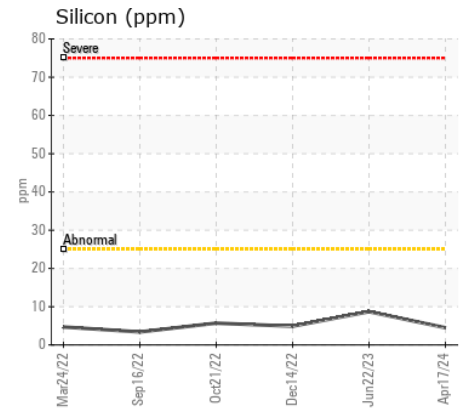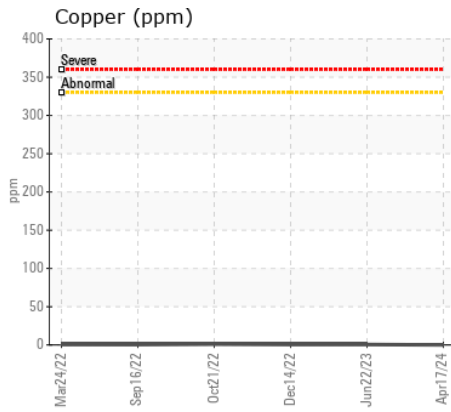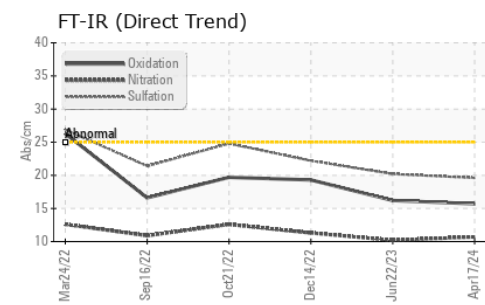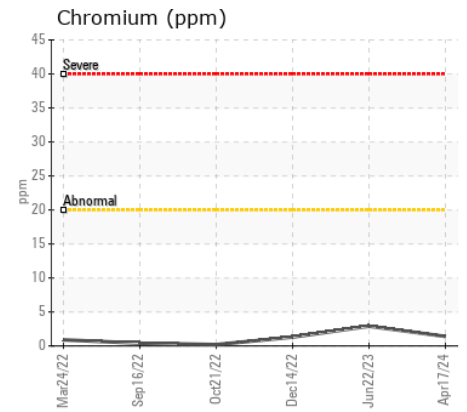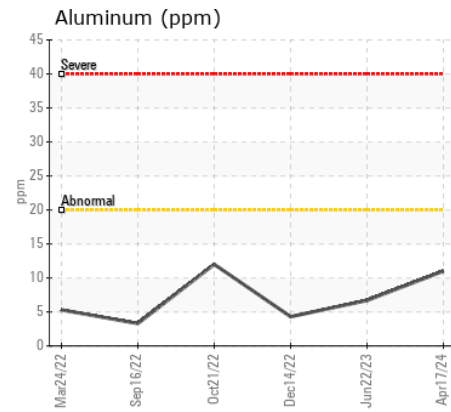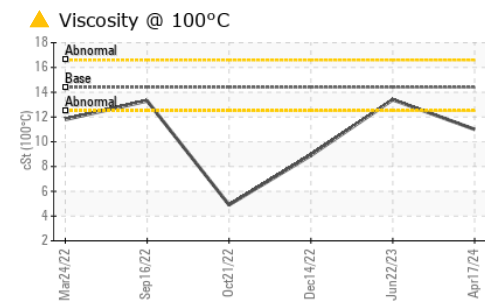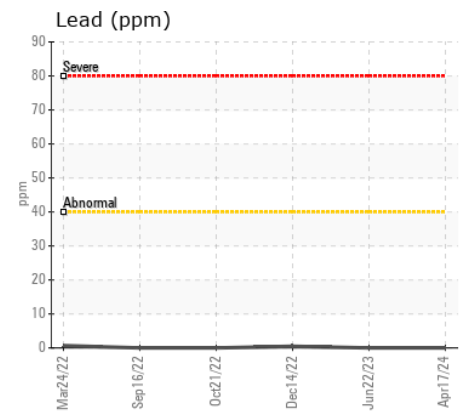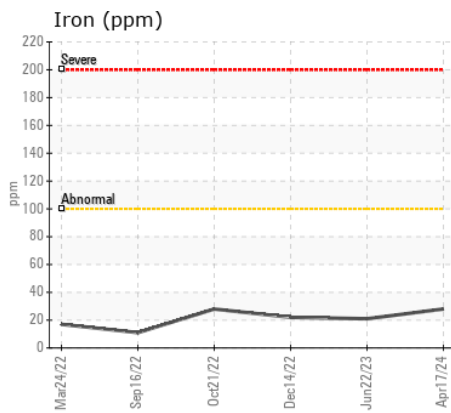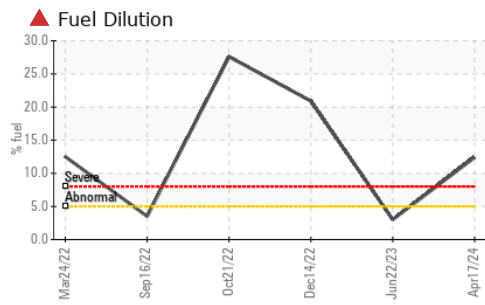

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0932891 **Received** : 30 May 2024  
**Lab Number** : 06195152 **Tested** : 04 Jun 2024  
**Unique Number** : 11057275 **Diagnosed** : 04 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel, TBN )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610  
 Contact: DEVIN WEBER  
 dweber@wcpss.net  
 T: (919)856-8076  
 F: x: