



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

[G15235]

Machine Id

JOHN DEERE 260E 1DW260ETCJF693406

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0007302</b>	WE0006158	---
Sample Date		Client Info		<b>23 May 2024</b>	29 Dec 2023	---
Machine Age	hrs	Client Info		<b>3415</b>	2914	---
Oil Age	hrs	Client Info		<b>500</b>	0	---
Filter Age	hrs	Client Info		<b>500</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>42</b>	16	---
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	2	---
Lead	ppm	ASTM D5185m	>26	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>6</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.4</b>	6.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.4</b>	19.7	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>2</b>	2	---
Boron	ppm	ASTM D5185m		<b>216</b>	272	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>209</b>	41	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>688</b>	160	---
Calcium	ppm	ASTM D5185m		<b>1415</b>	1866	---
Phosphorus	ppm	ASTM D5185m		<b>880</b>	1006	---
Zinc	ppm	ASTM D5185m		<b>1056</b>	1231	---
Sulfur	ppm	ASTM D5185m		<b>3253</b>	3355	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.7</b>	15.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>7.1</b>	7.5	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.5	---

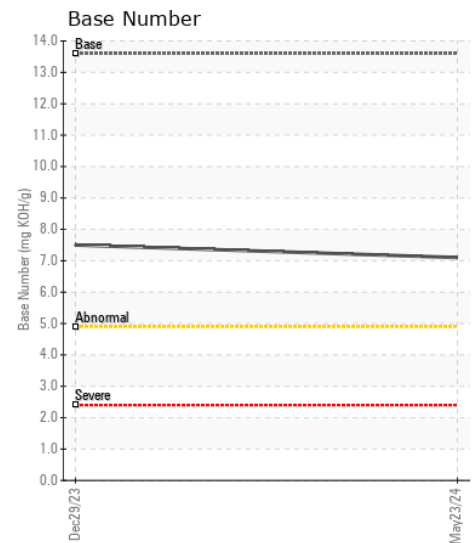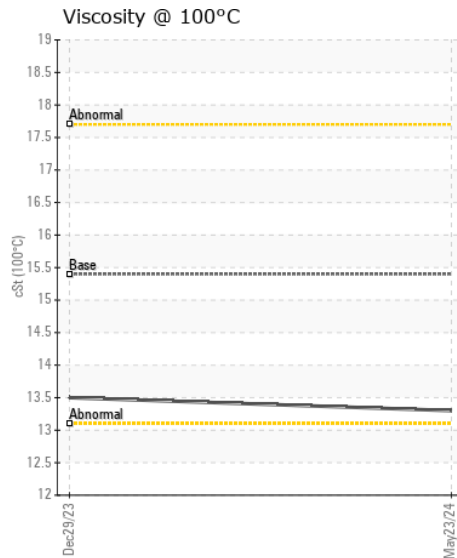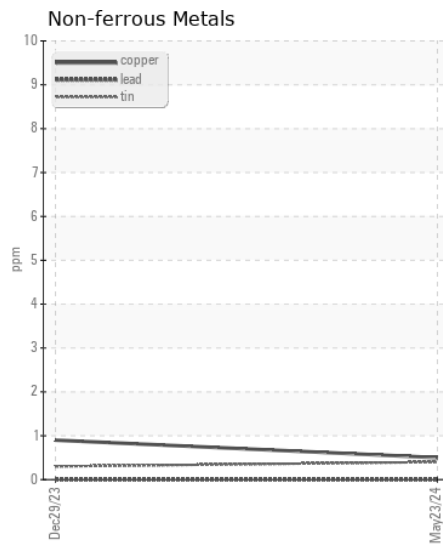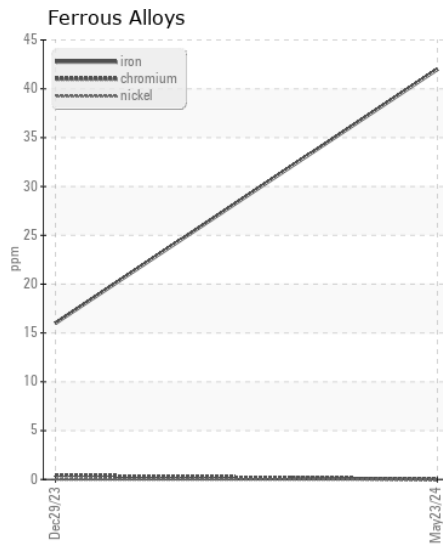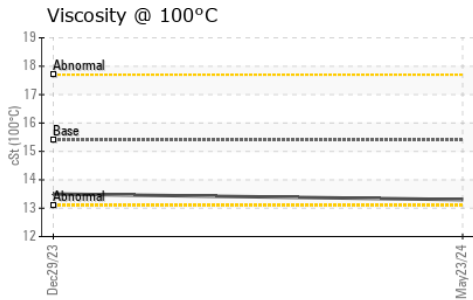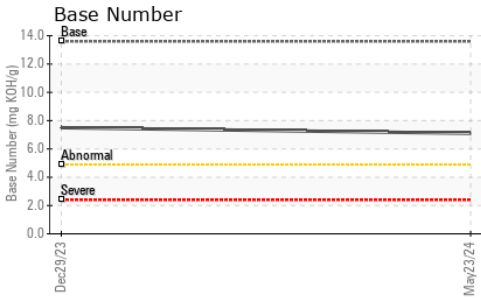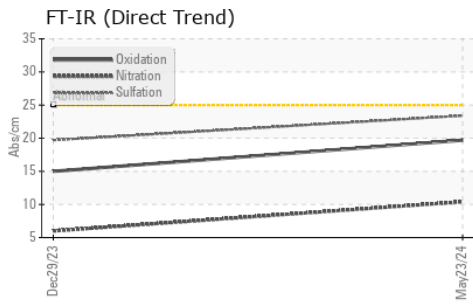

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0007302 **Received** : 30 May 2024  
**Lab Number** : 06195281 **Tested** : 31 May 2024  
**Unique Number** : 11057404 **Diagnosed** : 31 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**WARRIOR TRACTOR AND EQUIPMENT - GRAYSVILLE**  
 4308 WATER TRAIL  
 GRAYSVILLE, AL  
 US 35073  
 Contact: BEN BYRKET  
 bbyrket@warriortractor.com  
 T: (205)675-9045  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)