



WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area
[W67079]
 Machine Id
CASE TV370B JAFTV370PLM487166
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (7 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: W67079)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0215658	JR0188567	JR0142431
Sample Date		Client Info		28 May 2024	02 Oct 2023	27 Sep 2022
Machine Age	hrs	Client Info		2575	2062	1432
Oil Age	hrs	Client Info		513	630	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>65	12	8	11
Chromium	ppm	ASTM D5185m	>6	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>5	2	2	2
Lead	ppm	ASTM D5185m	>45	1	<1	<1
Copper	ppm	ASTM D5185m	>120	4	4	10
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>25	6	5	5
Potassium	ppm	ASTM D5185m	>20	4	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	8199	5023	1933
Particles >6µm		ASTM D7647	>1300	1720	724	95
Particles >14µm		ASTM D7647	>160	113	75	7
Particles >21µm		ASTM D7647	>40	23	38	2
Particles >38µm		ASTM D7647	>10	1	3	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/18/14	20/17/13	18/14/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	2
Boron	ppm	ASTM D5185m		95	92	55
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		32	31	60
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		165	177	349
Calcium	ppm	ASTM D5185m	87	1219	1142	1056
Phosphorus	ppm	ASTM D5185m	727	691	623	582
Zinc	ppm	ASTM D5185m	900	782	737	662
Sulfur	ppm	ASTM D5185m	1500	2548	2010	2650
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.83	0.94	0.94
Visc @ 40°C	cSt	ASTM D445	65	41.1	40.2	47.5

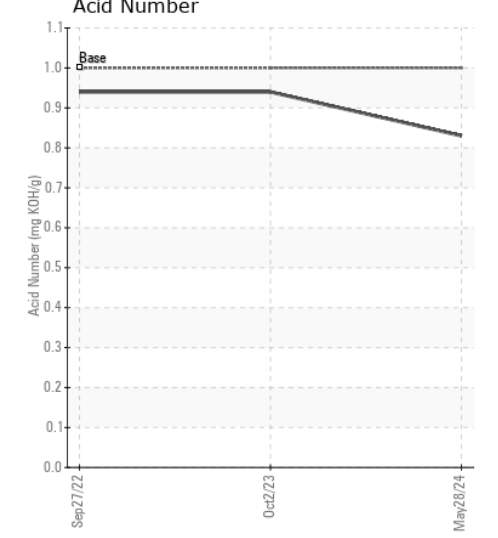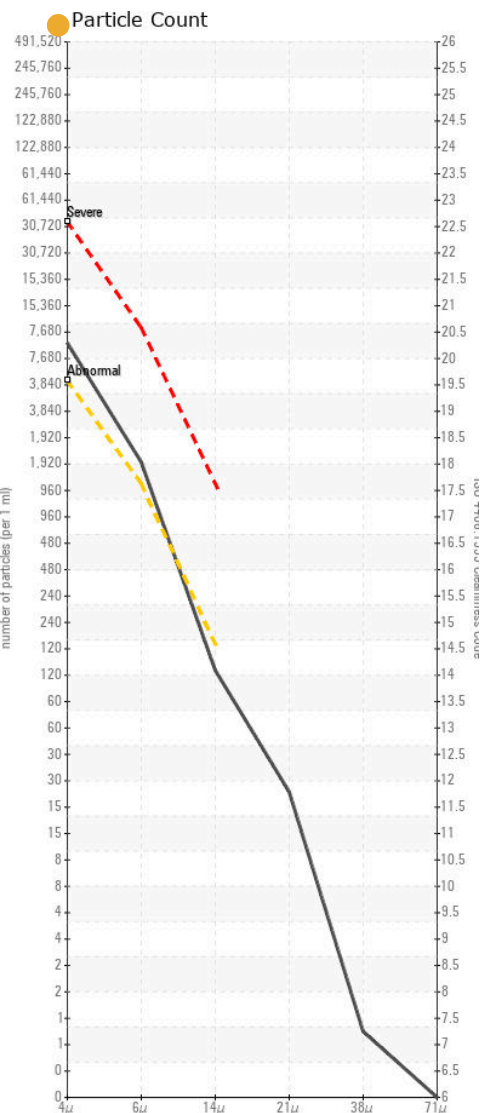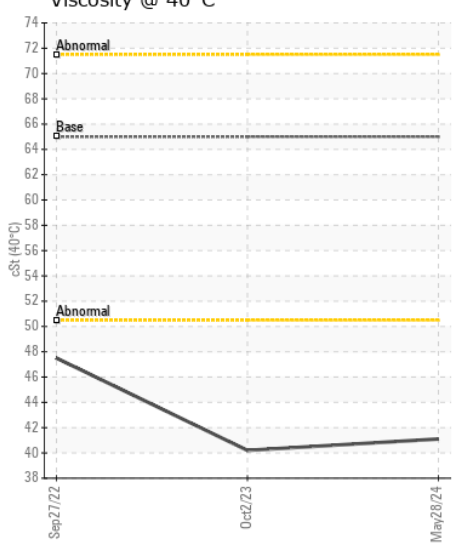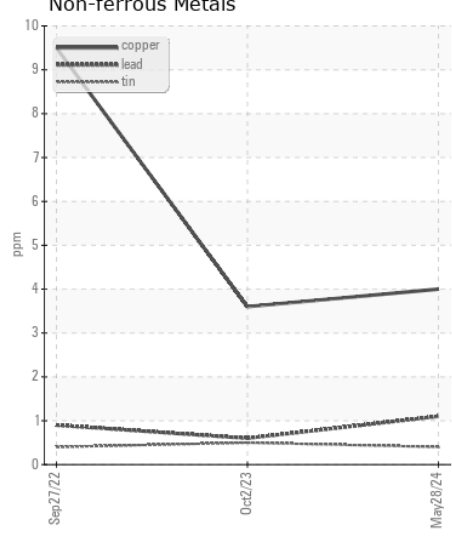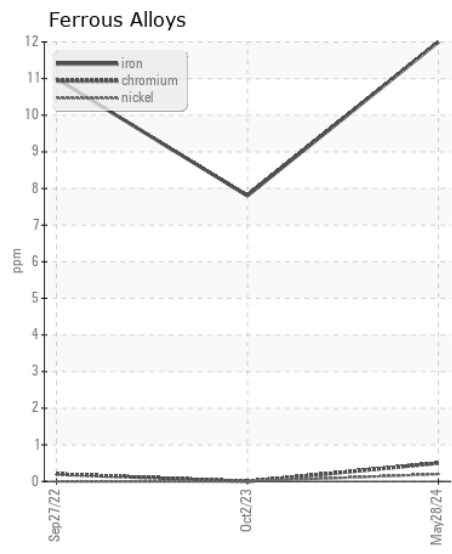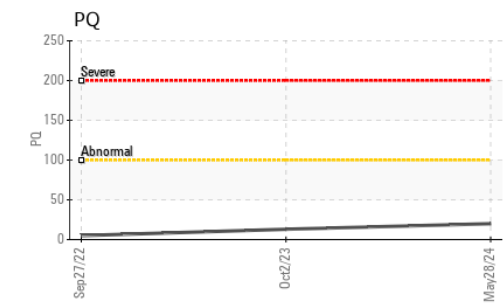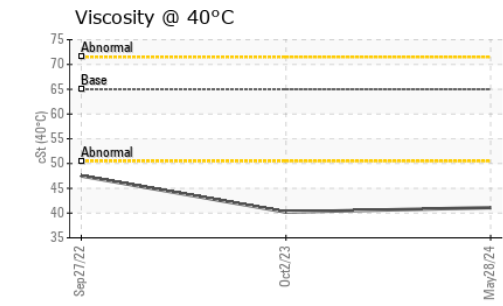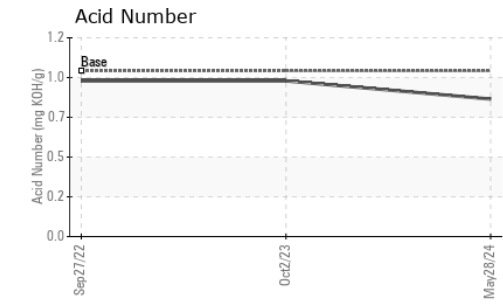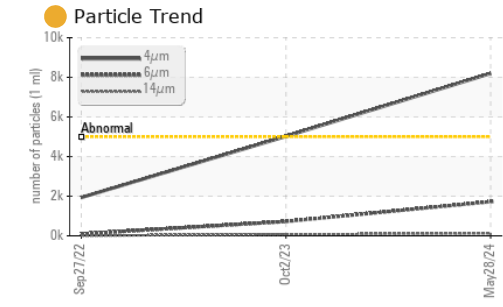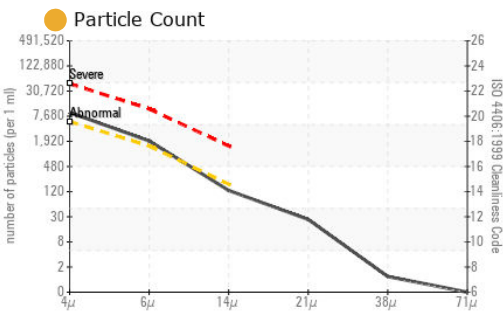

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0215658 **Received** : 30 May 2024
Lab Number : 06195315 **Tested** : 03 Jun 2024
Unique Number : 11057438 **Diagnosed** : 03 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ, PrtCount)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198