



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**JLG 530LRT PL0407**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample  
Comment: PLEASE RUN TBN )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0004999	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	hrs	Client Info		1390	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	4	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	21	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	18	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	1618	---	---
Particles >6µm		ASTM D7647	>1300	91	---	---
Particles >14µm		ASTM D7647	>160	10	---	---
Particles >21µm		ASTM D7647	>40	3	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/14/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	5	99	---	---
Barium	ppm	ASTM D5185m	5	<1	---	---
Molybdenum	ppm	ASTM D5185m	5	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	9	---	---
Calcium	ppm	ASTM D5185m	200	2762	---	---
Phosphorus	ppm	ASTM D5185m	300	804	---	---
Zinc	ppm	ASTM D5185m	370	1266	---	---
Sulfur	ppm	ASTM D5185m	2500	6593	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	1.691	---	---
Visc @ 40°C	cSt	ASTM D445	46	45.0	---	---

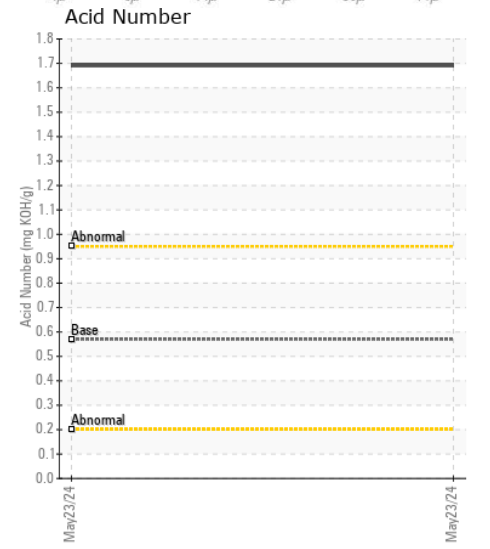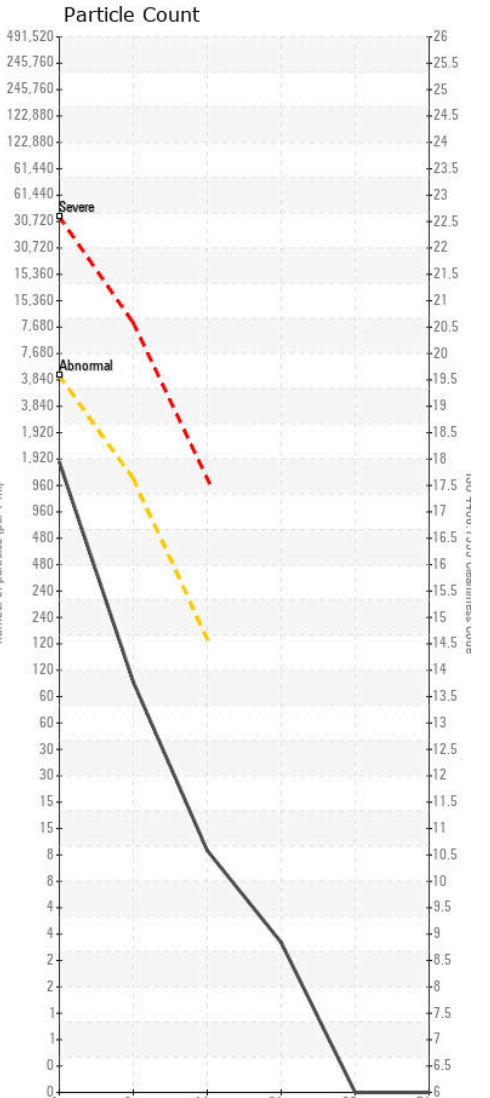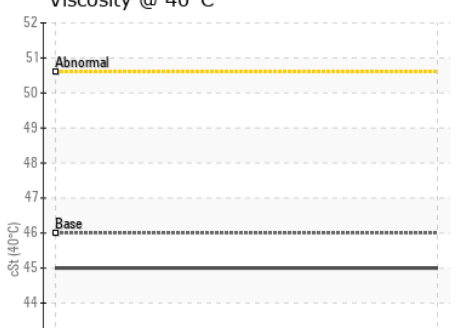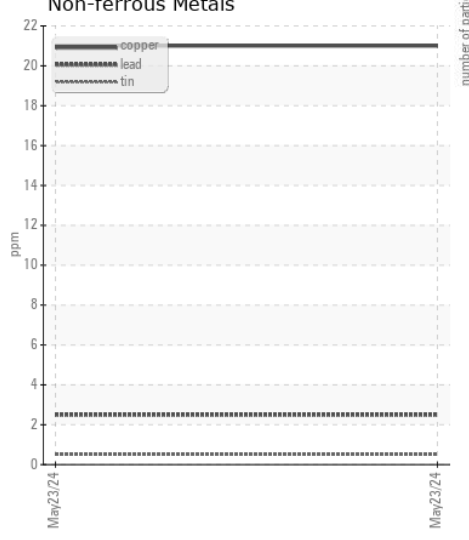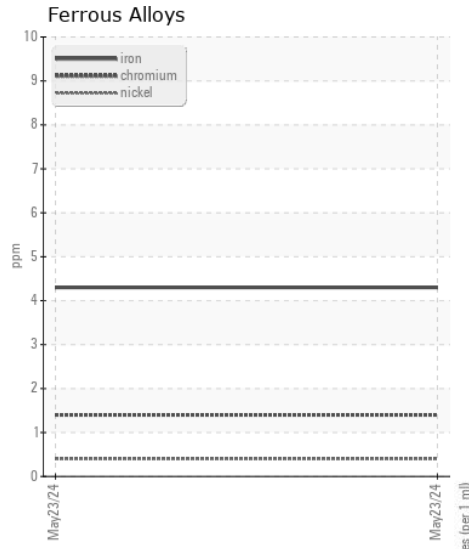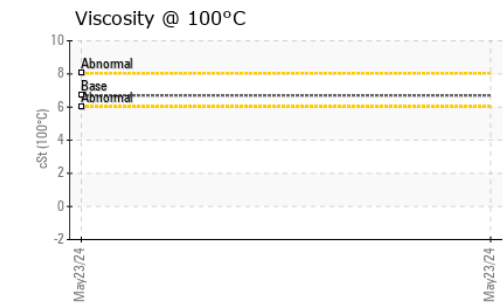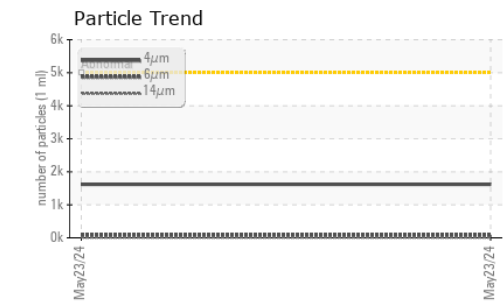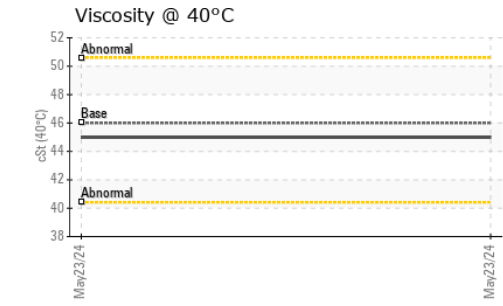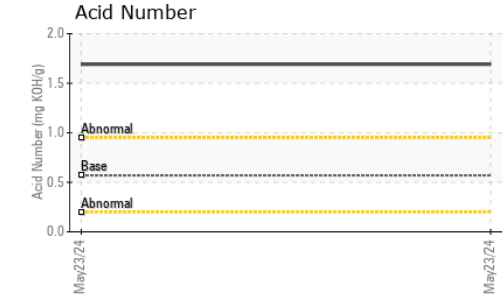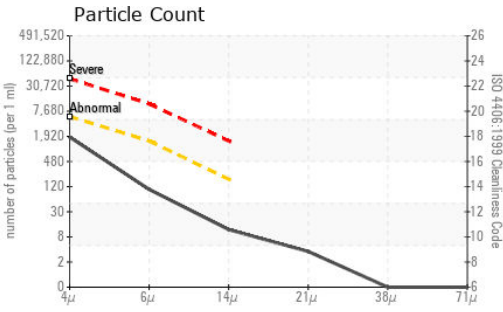

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0004999 **Received** : 30 May 2024  
**Lab Number** : 06195387 **Tested** : 01 Jun 2024  
**Unique Number** : 11057510 **Diagnosed** : 01 Jun 2024 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

**STEVENSON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440  
 Contact: DAVE KOEHNE  
 davidk@stevensoncrane.com  
 T: (630)972-9199  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)