



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**BOLINGBROOK**  
Machine Id  
**TADANO GR-350XL-3 RT2380 (S/N 26758324)**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL 10W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0004995	---	---
Sample Date		Client Info		08 May 2024	---	---
Machine Age	hrs	Client Info		1206	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	58	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	12	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	28	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	24	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	14.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	37.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	250	24	---	---
Barium	ppm	ASTM D5185m	10	3	---	---
Molybdenum	ppm	ASTM D5185m	100	503	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	450	888	---	---
Calcium	ppm	ASTM D5185m	3000	2441	---	---
Phosphorus	ppm	ASTM D5185m	1150	937	---	---
Zinc	ppm	ASTM D5185m	1350	1197	---	---
Sulfur	ppm	ASTM D5185m	4250	7937	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	40.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	11.29	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	---	---

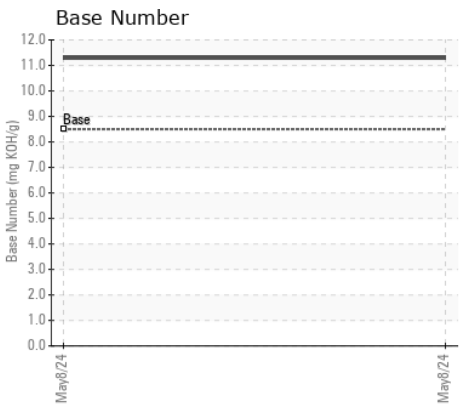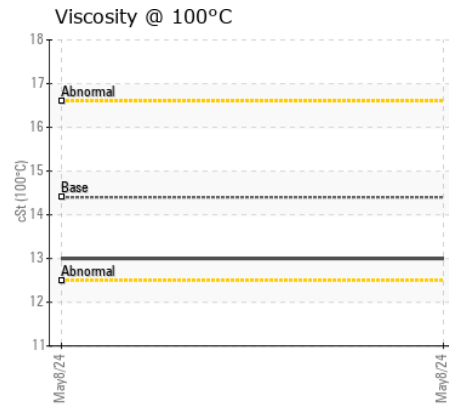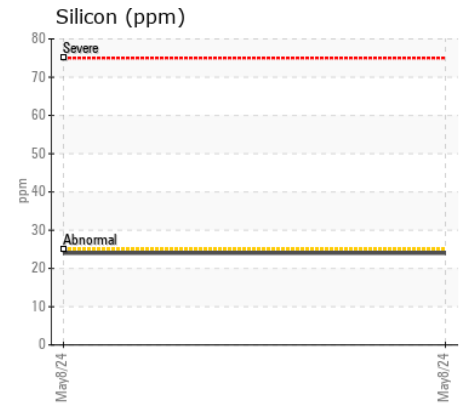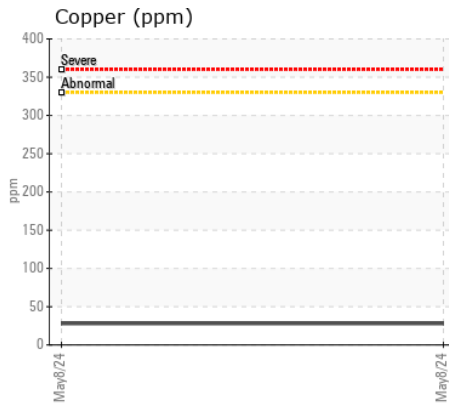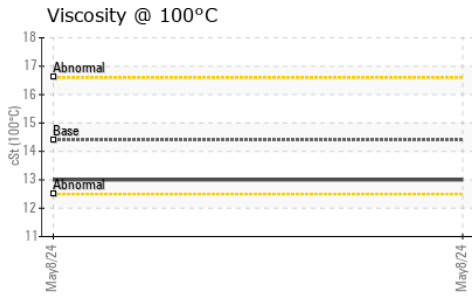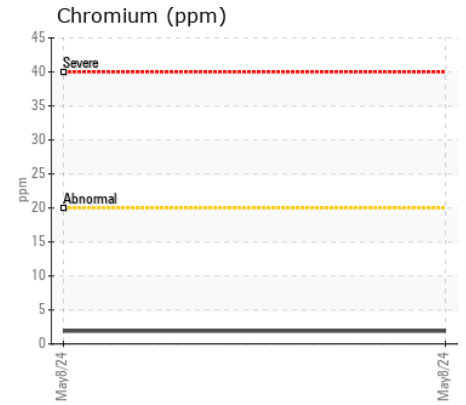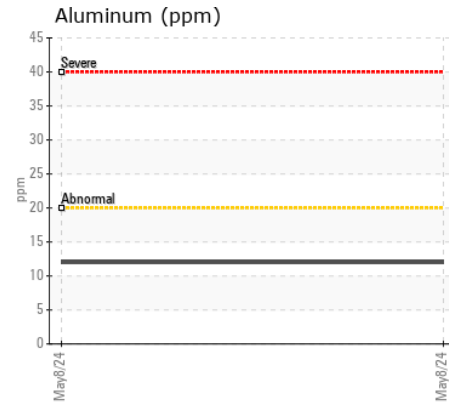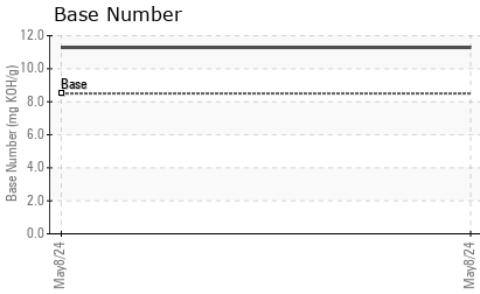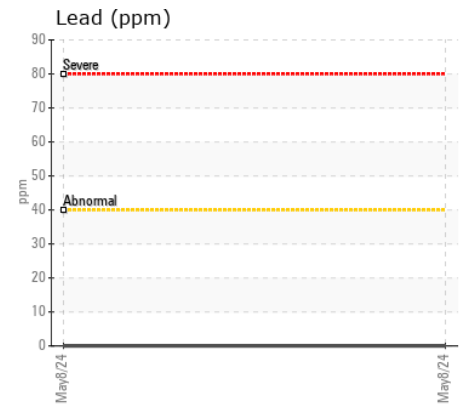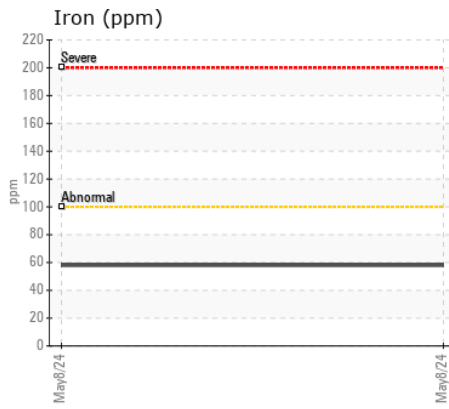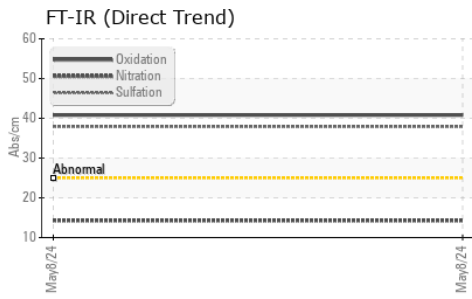

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0004995 **Received** : 30 May 2024  
**Lab Number** : 06195629 **Tested** : 31 May 2024  
**Unique Number** : 11057752 **Diagnosed** : 01 Jun 2024 - Don Baldrige  
**Test Package** : MOB 2

**STEVENSON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440  
 Contact: JOE HAMMOND  
 joe@stevensoncrane.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)