



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 772GP 1DW772GPCKF702581
Component
Transmission (Manual)
Fluid
TDTO FLUID SAE 10W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212614	JR0209426	JR0181695
Sample Date		Client Info		29 May 2024	15 Mar 2024	17 Aug 2023
Machine Age	hrs	Client Info		4273	3972	3085
Oil Age	hrs	Client Info		301	2901	2578
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Not Changd
Filter Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	14	19	10
Iron	ppm	ASTM D5185m	>200	41	43	4
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	4
Lead	ppm	ASTM D5185m	>45	<1	2	6
Copper	ppm	ASTM D5185m	>225	18	19	9
Tin	ppm	ASTM D5185m	>10	<1	0	2
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	7	7	7
Potassium	ppm	ASTM D5185m	>20	0	1	5
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	6	6
Boron	ppm	ASTM D5185m	37	<1	0	1
Barium	ppm	ASTM D5185m	7	<1	<1	0
Molybdenum	ppm	ASTM D5185m	5	0	0	4
Manganese	ppm	ASTM D5185m		8	8	2
Magnesium	ppm	ASTM D5185m	40	88	78	119
Calcium	ppm	ASTM D5185m	2650	3268	3158	4084
Phosphorus	ppm	ASTM D5185m	1050	1068	938	1180
Zinc	ppm	ASTM D5185m	1075	1247	1147	1586
Sulfur	ppm	ASTM D5185m	5750	3941	3631	5347
Visc @ 40°C	cSt	ASTM D445	40	44.6	43.4	58.2

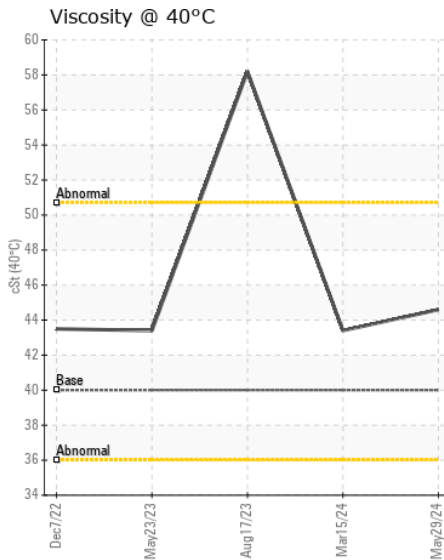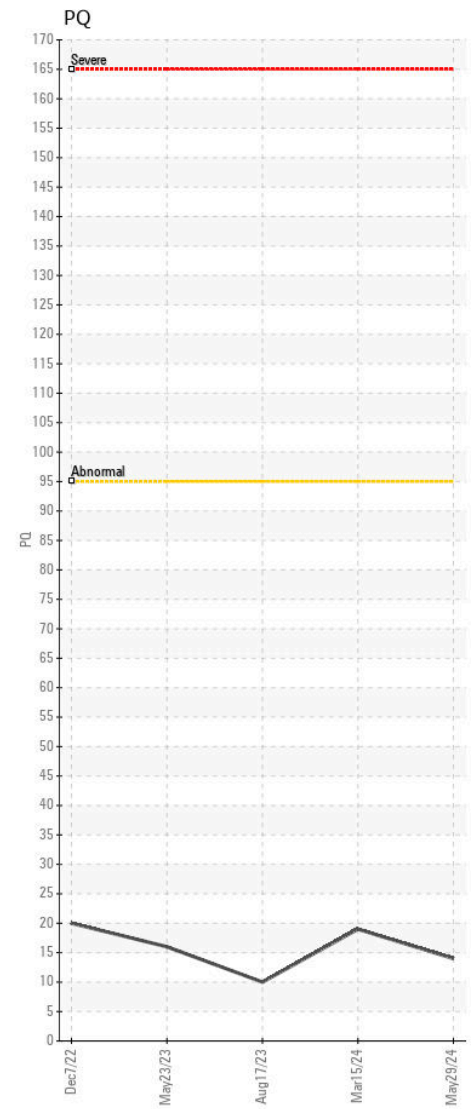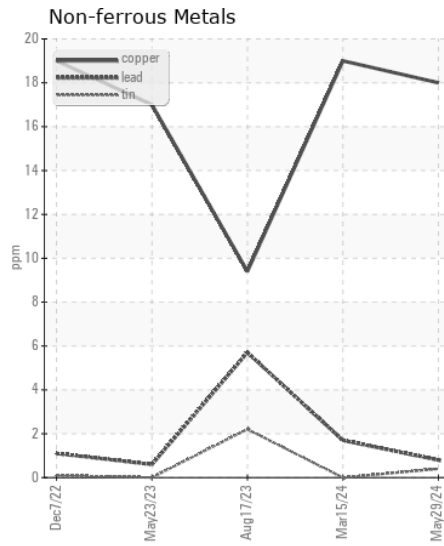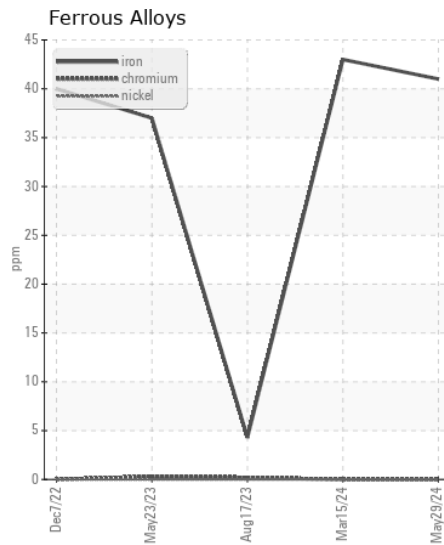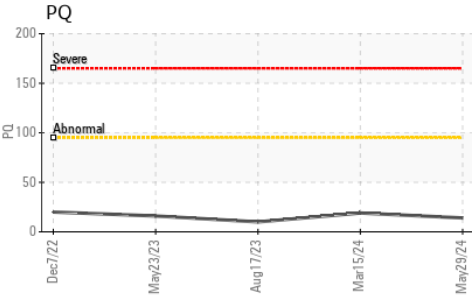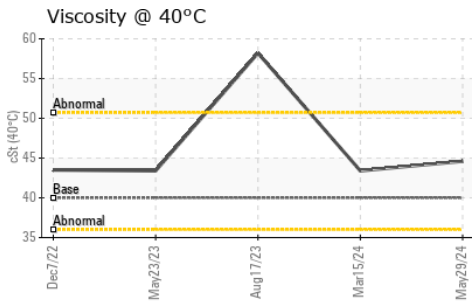

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212614 **Received** : 30 May 2024
Lab Number : 06195645 **Tested** : 31 May 2024
Unique Number : 11057768 **Diagnosed** : 01 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432