



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 1050K 1T01050KHLF373986
 Component
Right Outer Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0214179	JR0193535	JR0189487
Sample Date		Client Info		29 May 2024	18 Dec 2023	04 Oct 2023
Machine Age	hrs	Client Info		12950	12480	12146
Oil Age	hrs	Client Info		12292	334	11590
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	18	12	21
Iron	ppm	ASTM D5185m	>750	10	7	16
Chromium	ppm	ASTM D5185m	>9	0	<1	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>40	<1	<1	<1
Lead	ppm	ASTM D5185m	>15	0	1	0
Copper	ppm	ASTM D5185m	>40	0	0	0
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	6	6	5
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	0	<1
Boron	ppm	ASTM D5185m	6	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	145	106	83	101
Calcium	ppm	ASTM D5185m	3570	3457	3202	3241
Phosphorus	ppm	ASTM D5185m	1290	1062	911	976
Zinc	ppm	ASTM D5185m	1640	1268	1141	1216
Sulfur	ppm	ASTM D5185m		3976	3328	3282
Visc @ 40°C	cSt	ASTM D445	57.0	55.4	56.7	55.3

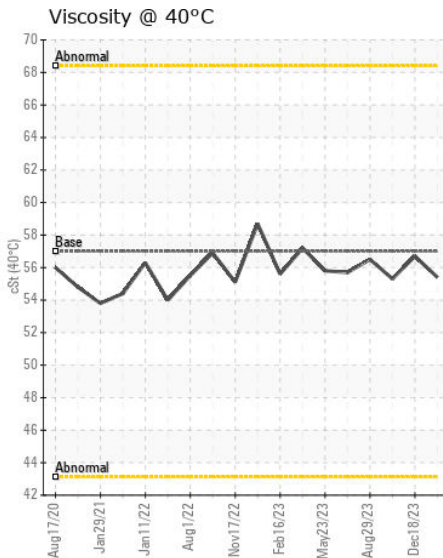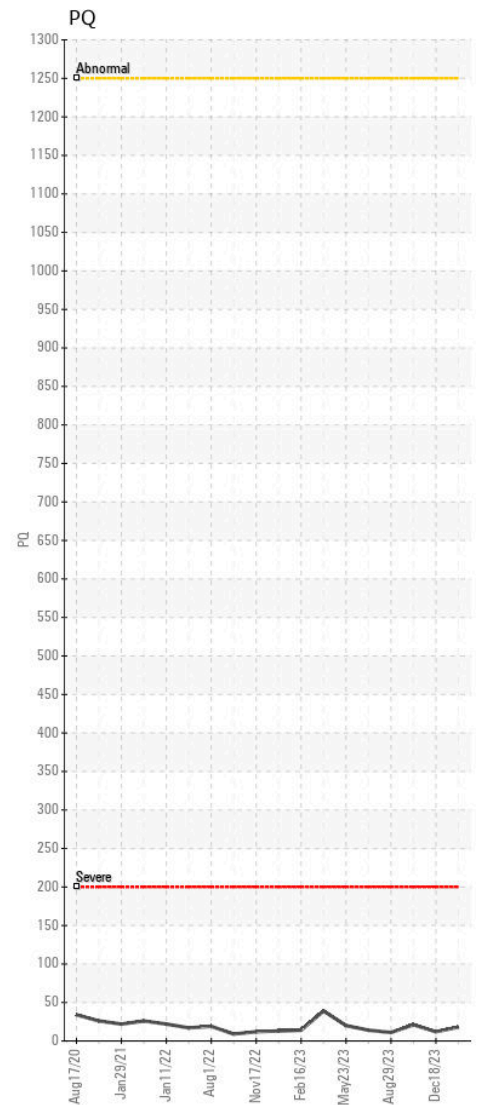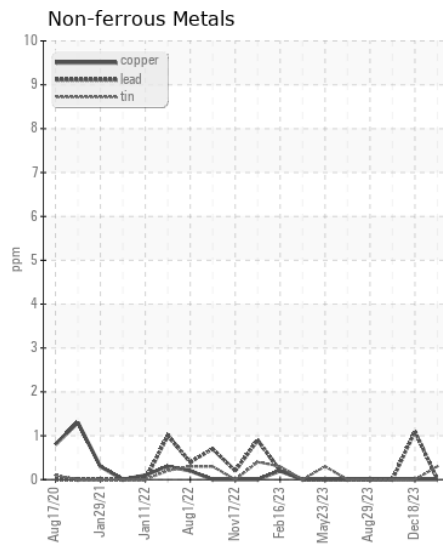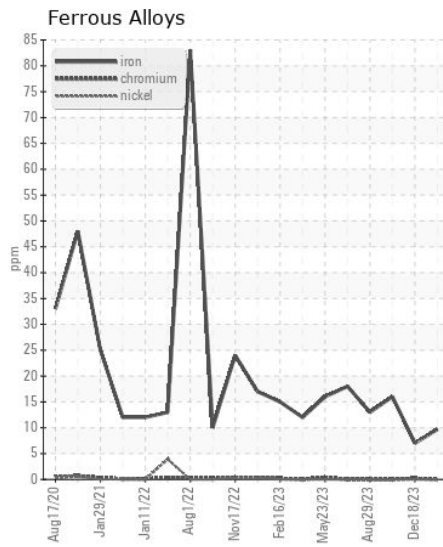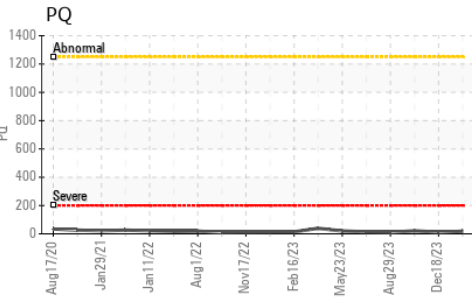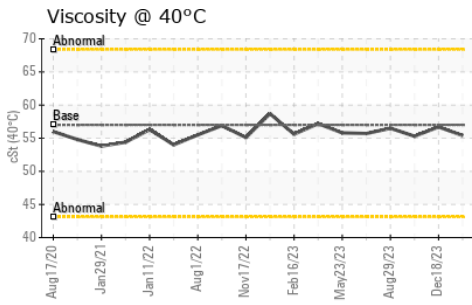

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0214179 **Received** : 30 May 2024
Lab Number : 06195660 **Tested** : 31 May 2024
Unique Number : 11057783 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - NEW BERN
 3816 MARTIN LUTHER KING BLVD
 NEW BERN, NC
 US 28562
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

T:
F: