



WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
[W67131]
 Machine Id
JOHN DEERE 350G 1FF350GXCKF813557
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor. (Customer Sample Comment: W67131)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0215665	JR0198669	JR0188252
Sample Date		Client Info		29 May 2024	28 Dec 2023	22 Sep 2023
Machine Age	hrs	Client Info		7003	6521	6116
Oil Age	hrs	Client Info		6598	405	623
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Gear wear is indicated.

PQ		ASTM D8184	>1250	145	40	49
Iron	ppm	ASTM D5185m	>750	▲ 1251	46	704
Chromium	ppm	ASTM D5185m	>9	▲ 14	0	9
Nickel	ppm	ASTM D5185m	>10	2	0	1
Titanium	ppm	ASTM D5185m		3	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	● 43	0	8
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	2	0	1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	▲ 117	3	23
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	0	0
Boron	ppm	ASTM D5185m		144	17	141
Barium	ppm	ASTM D5185m		<1	0	2
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		14	0	8
Magnesium	ppm	ASTM D5185m		14	2	2
Calcium	ppm	ASTM D5185m		57	91	21
Phosphorus	ppm	ASTM D5185m		1004	377	961
Zinc	ppm	ASTM D5185m		23	24	12
Sulfur	ppm	ASTM D5185m		22318	18263	20310
Visc @ 40°C	cSt	ASTM D445		147	137	144

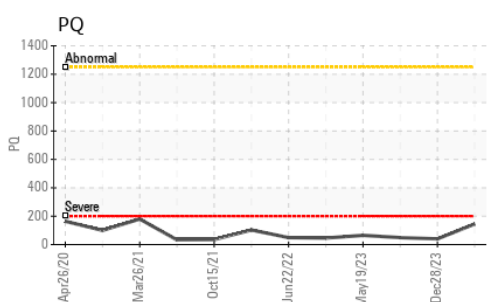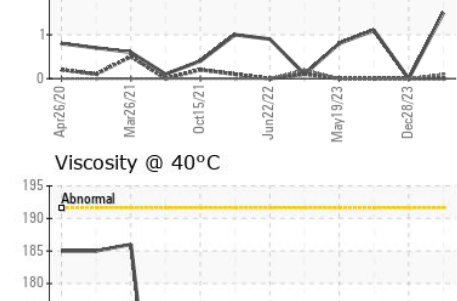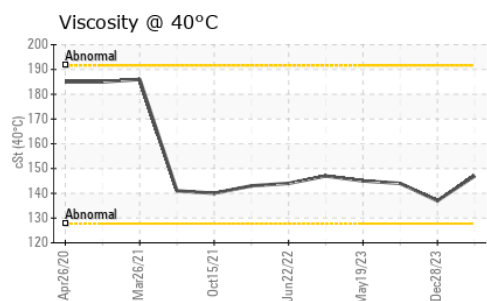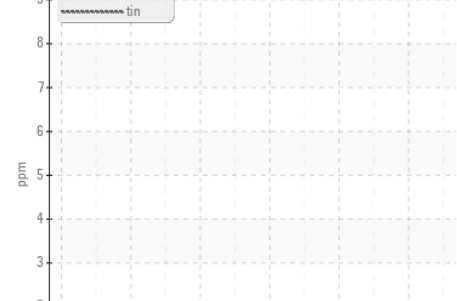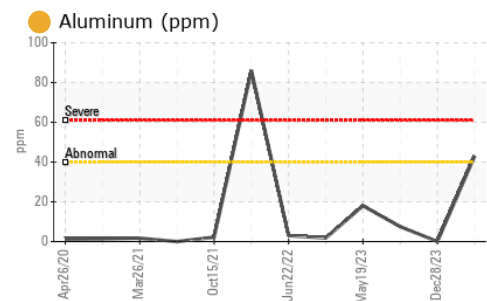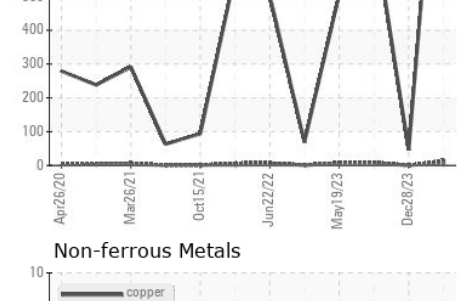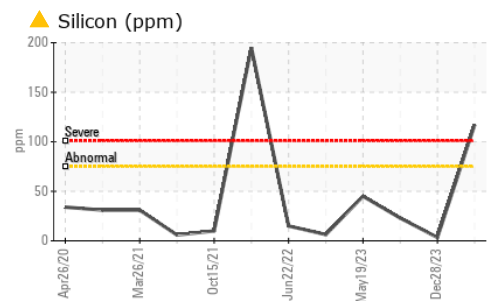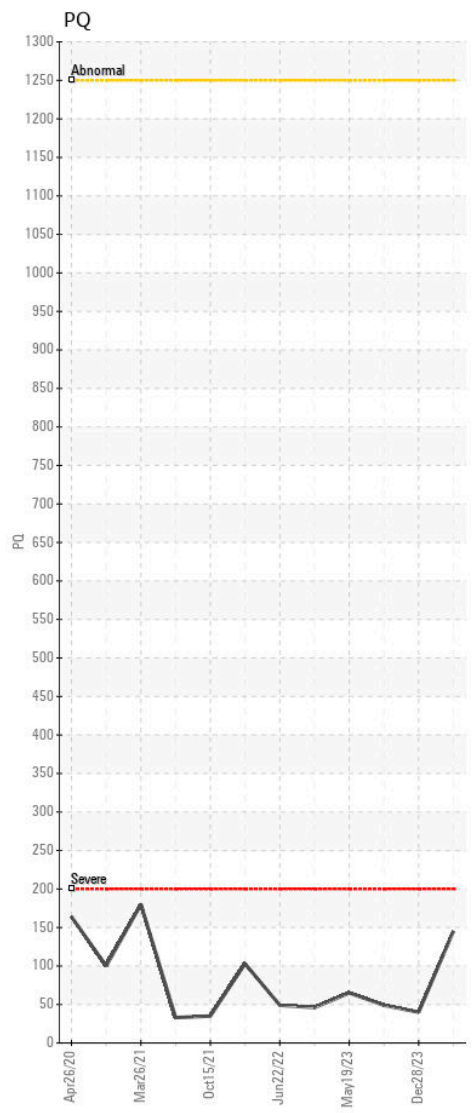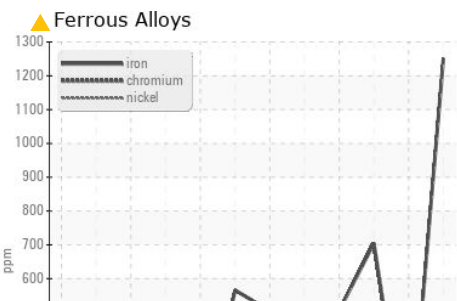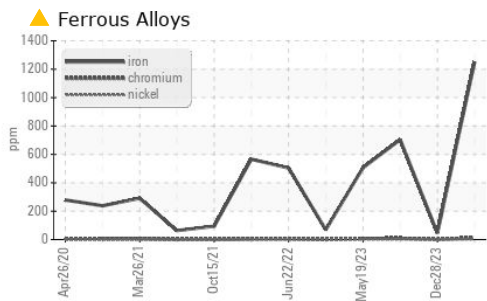

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0215665 **Received** : 30 May 2024
Lab Number : 06195662 **Tested** : 31 May 2024
Unique Number : 11057785 **Diagnosed** : 01 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)