



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W67069]
 Machine Id
JOHN DEERE 700K 1T0700KXKJF327083
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (5 GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W67069)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0214944	JR0198967	JR0179025
Sample Date		Client Info		28 May 2024	11 Jan 2024	02 Aug 2023
Machine Age	hrs	Client Info		8286	7735	7200
Oil Age	hrs	Client Info		6668	535	1083
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	17	14	110
Iron	ppm	ASTM D5185m	>750	24	5	145
Chromium	ppm	ASTM D5185m	>9	0	0	1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	<1	<1	5
Lead	ppm	ASTM D5185m	>15	0	0	<1
Copper	ppm	ASTM D5185m	>40	3	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	3	5	17
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	1	2
Boron	ppm	ASTM D5185m	6	6	2	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	4	<1	1
Manganese	ppm	ASTM D5185m		<1	0	2
Magnesium	ppm	ASTM D5185m	145	15	104	102
Calcium	ppm	ASTM D5185m	3570	112	3290	3402
Phosphorus	ppm	ASTM D5185m	1290	688	1068	991
Zinc	ppm	ASTM D5185m	1640	838	1233	1228
Sulfur	ppm	ASTM D5185m		2535	4007	4047
Visc @ 40°C	cSt	ASTM D445	57.0	55.5	58.7	51.6

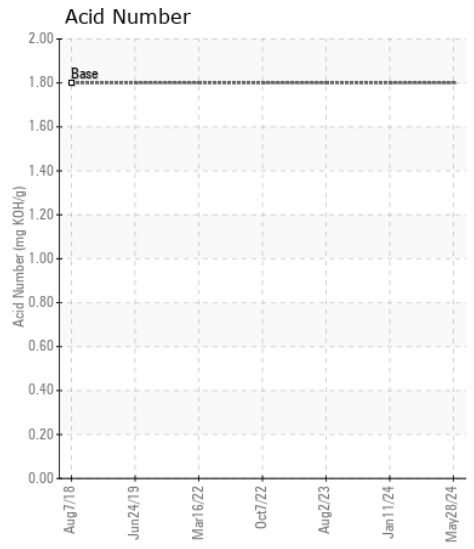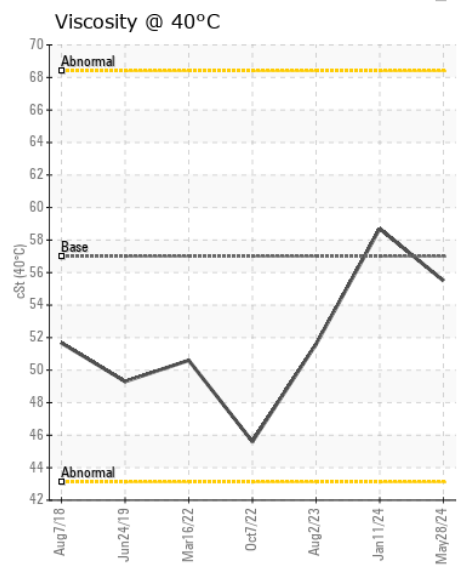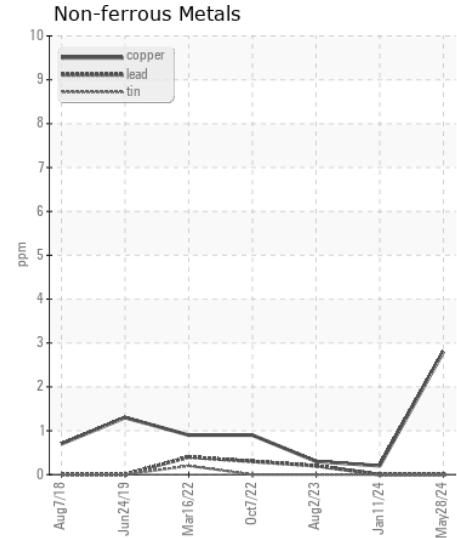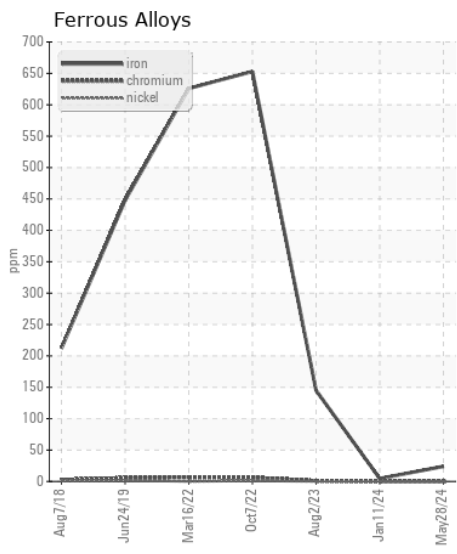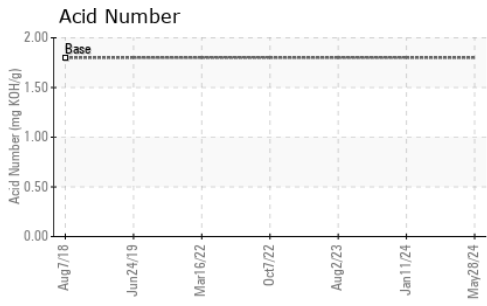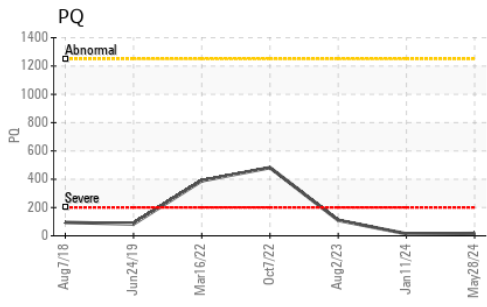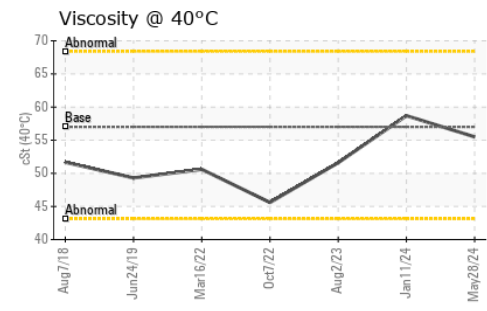

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0214944
Lab Number : 06195665
Unique Number : 11057788
Test Package : CONST (Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN, TAN Ma

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)