



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 850L 1T0850LXLMF409041
 Component
Right Inner Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0209917	JR0166683	JR0157773
Sample Date		Client Info		28 May 2024	05 Apr 2023	12 Jan 2023
Machine Age	hrs	Client Info		5000	3431	2974
Oil Age	hrs	Client Info		1000	3431	2974
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	146	105	127
Iron	ppm	ASTM D5185m	>750	138	135	189
Chromium	ppm	ASTM D5185m	>9	<1	<1	1
Nickel	ppm	ASTM D5185m	>10	0	<1	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	2	2	2
Lead	ppm	ASTM D5185m	>15	0	0	6
Copper	ppm	ASTM D5185m	>40	0	0	2
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	9	9	8
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	0	5
Boron	ppm	ASTM D5185m	6	0	6	13
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	6	12
Manganese	ppm	ASTM D5185m		2	1	2
Magnesium	ppm	ASTM D5185m	145	103	127	139
Calcium	ppm	ASTM D5185m	3570	3495	3538	3654
Phosphorus	ppm	ASTM D5185m	1290	1079	1069	1095
Zinc	ppm	ASTM D5185m	1640	1249	1240	1245
Sulfur	ppm	ASTM D5185m		4043	3886	4515
Visc @ 40°C	cSt	ASTM D445	57.0	50.4	52.3	51.6

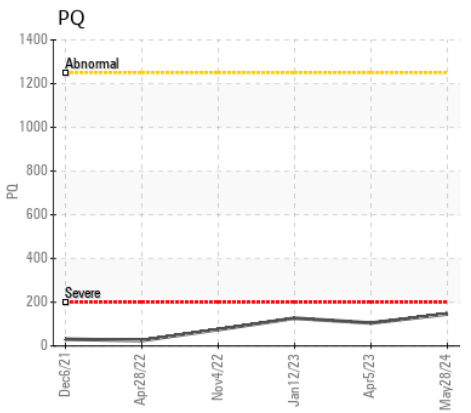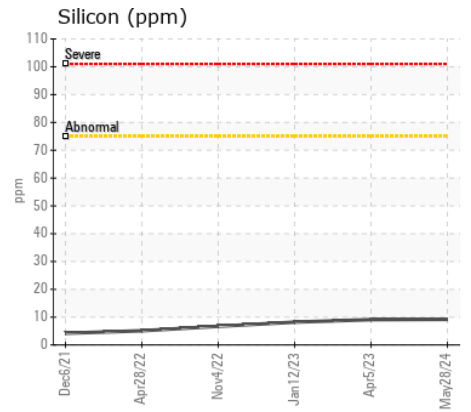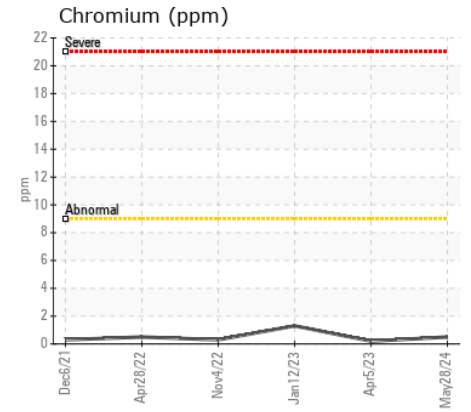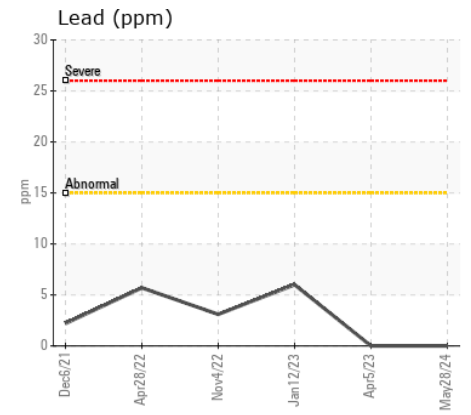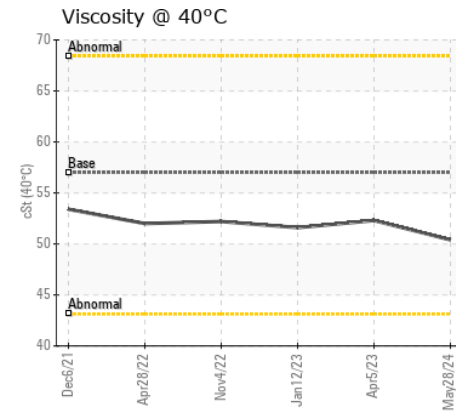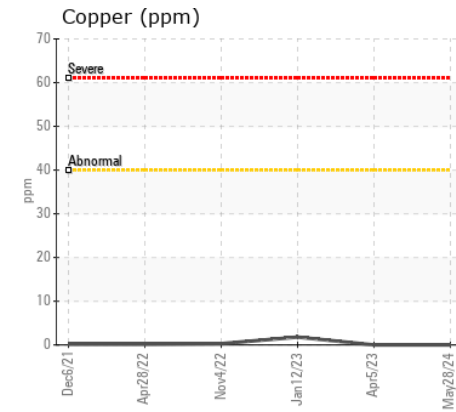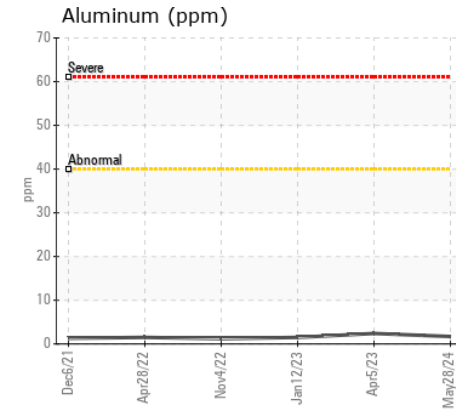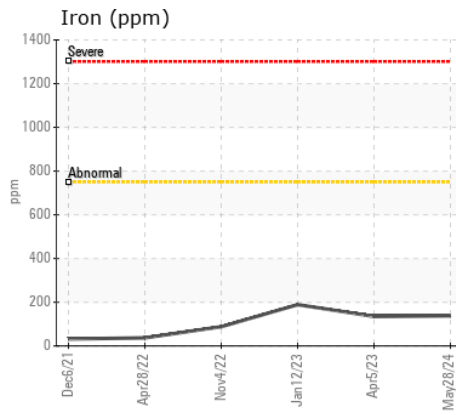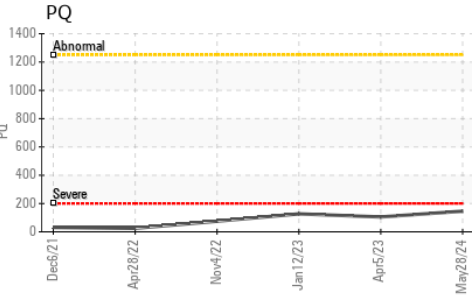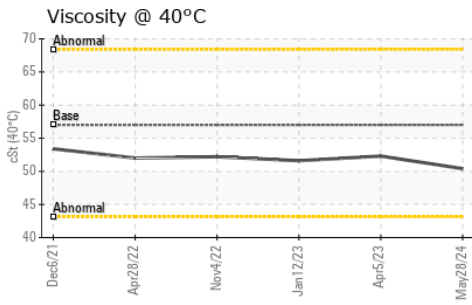

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0209917 **Received** : 30 May 2024
Lab Number : 06195668 **Tested** : 31 May 2024
Unique Number : 11057791 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : MOBCE (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136

Contact: DANNY HUFF
 dhuff@bandssite.com

T: (540)270-3203

F: (703)753-0605