



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W67134]

Machine Id
JOHN DEERE 135G 1FF135GXVKF501242

Component
Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W67134)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0215614	JR0142051	JR0134916
Sample Date		Client Info		28 May 2024	06 Sep 2022	07 Jul 2022
Machine Age	hrs	Client Info		5616	3892	3722
Oil Age	hrs	Client Info		1724	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	12	122	30
Iron	ppm	ASTM D5185m	>750	0	▲ 1406	47
Chromium	ppm	ASTM D5185m	>9	0	▲ 14	<1
Nickel	ppm	ASTM D5185m	>10	0	2	0
Titanium	ppm	ASTM D5185m		0	4	<1
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>40	0	● 48	2
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	0	5	<1
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	1	▲ 149	14
Potassium	ppm	ASTM D5185m	>20	0	3	1
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	0	<1
Boron	ppm	ASTM D5185m		0	22	75
Barium	ppm	ASTM D5185m		0	0	8
Molybdenum	ppm	ASTM D5185m		0	1	0
Manganese	ppm	ASTM D5185m		<1	12	2
Magnesium	ppm	ASTM D5185m		<1	0	<1
Calcium	ppm	ASTM D5185m		4	41	14
Phosphorus	ppm	ASTM D5185m		333	319	499
Zinc	ppm	ASTM D5185m		0	37	11
Sulfur	ppm	ASTM D5185m		22326	16745	17574
Visc @ 40°C	cSt	ASTM D445		143	151	186


Viscosity @ 40°C

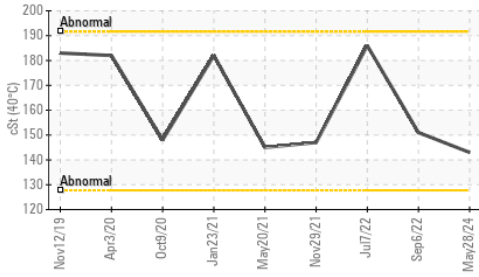


PQ

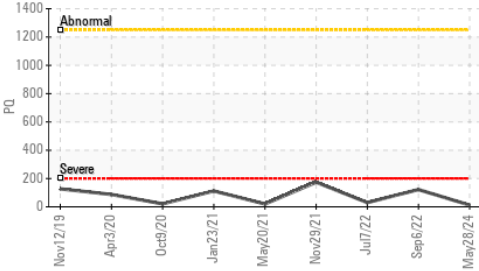


Ferrous Alloys

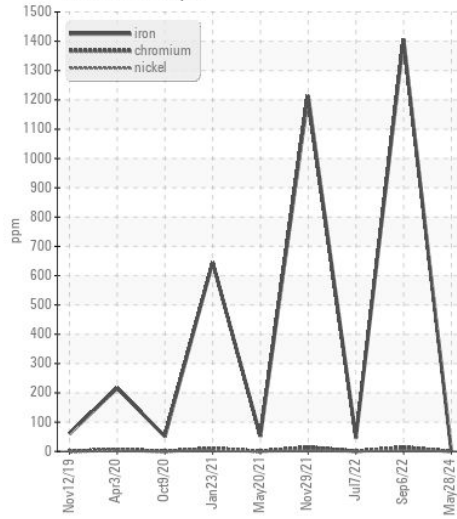


PQ

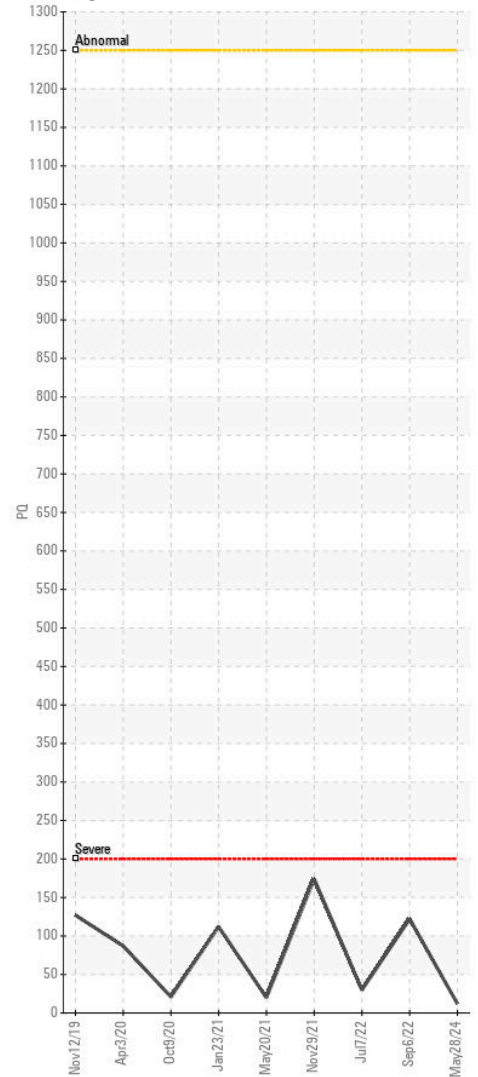

Non-ferrous Metals

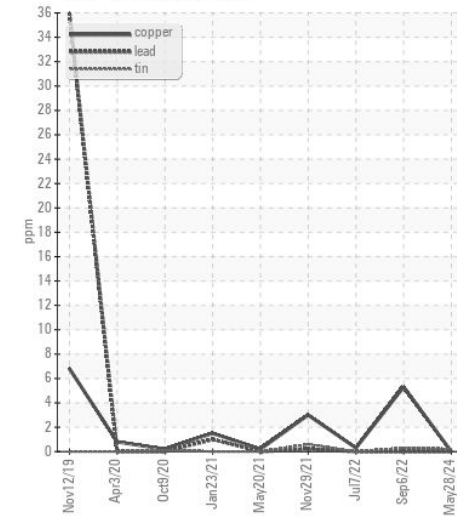

Viscosity @ 40°C

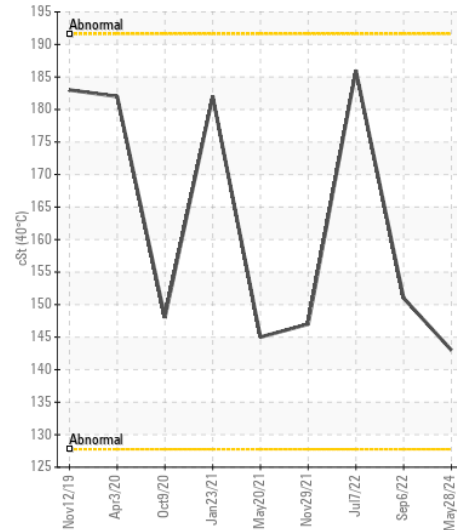

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0215614 **Received** : 30 May 2024
Lab Number : 06195679 **Tested** : 31 May 2024
Unique Number : 11057802 **Diagnosed** : 01 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198