



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A40G 341113**  
Component  
**Brake Cooling System**  
Fluid  
**TRANSAXLE OIL SAE 75W80 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0001620</b>	---	---
Sample Date		Client Info		<b>24 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>9902</b>	---	---
Oil Age	hrs	Client Info		<b>2000</b>	---	---
Filter Age	hrs	Client Info		<b>2000</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>29</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>2</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>123</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	<b>12</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>6</b>	---	---
Boron	ppm	ASTM D5185m	160	<b>84</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	25	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>11</b>	---	---
Calcium	ppm	ASTM D5185m	3750	<b>3210</b>	---	---
Phosphorus	ppm	ASTM D5185m	1200	<b>1253</b>	---	---
Zinc	ppm	ASTM D5185m	1500	<b>1437</b>	---	---
Sulfur	ppm	ASTM D5185m	6000	<b>5010</b>	---	---
Visc @ 40°C	cSt	ASTM D445	48	<b>42.2</b>	---	---

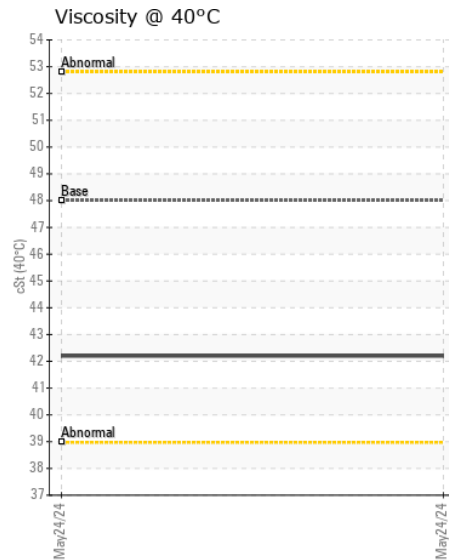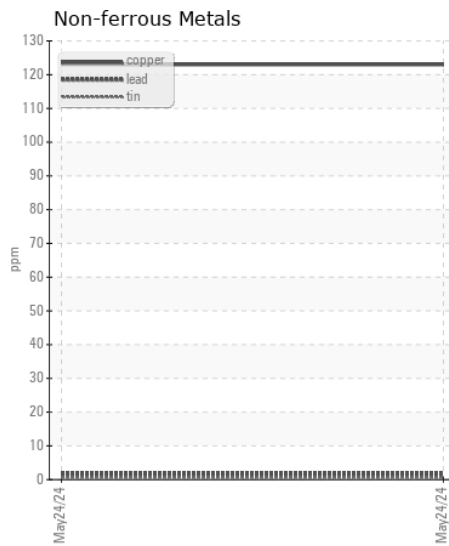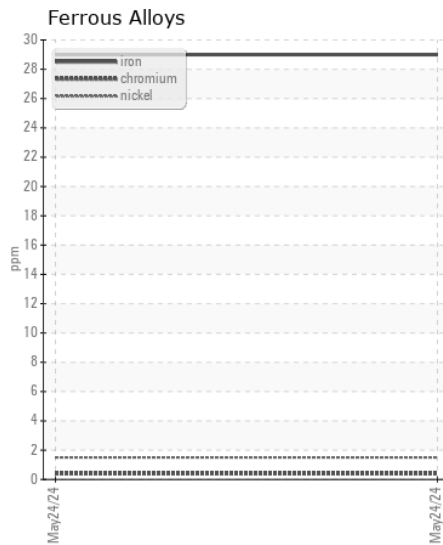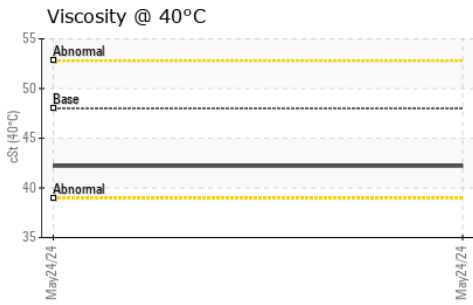

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0001620  
**Lab Number** : 06195713  
**Unique Number** : 11057836  
**Test Package** : CONST

**Received** : 30 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 01 Jun 2024 - Don Baldrige

**MCCLUNG-LOGAN EQUIPMENT CO - SALEM**  
 2025 COOK DRIVE  
 SALEM, VA  
 US 24153  
 Contact: SCOTT CARR  
 scarr@mcclung-logan.com  
 T: (540)418-5218  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)