



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L110H 631237**  
Component  
**Rear Axle**  
Fluid  
**VOLVO WB 102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP444750</b>	VCP426222	VCP388142
Sample Date		Client Info		<b>22 Apr 2024</b>	06 Sep 2023	02 Nov 2022
Machine Age	hrs	Client Info		<b>10448</b>	9867	8131
Oil Age	hrs	Client Info		<b>0</b>	0	2000
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>35</b>	59	80
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>120	<b>0</b>	<1	2
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>10</b>	11	13
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	9
Boron	ppm	ASTM D5185m		<b>17</b>	17	134
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	1
Magnesium	ppm	ASTM D5185m		<b>12</b>	14	20
Calcium	ppm	ASTM D5185m		<b>3382</b>	3241	3625
Phosphorus	ppm	ASTM D5185m		<b>1229</b>	1187	1164
Zinc	ppm	ASTM D5185m		<b>1456</b>	1421	1404
Sulfur	ppm	ASTM D5185m		<b>4812</b>	4119	5006
Visc @ 40°C	cSt	ASTM D445	55	<b>40.9</b>	41.1	41.7

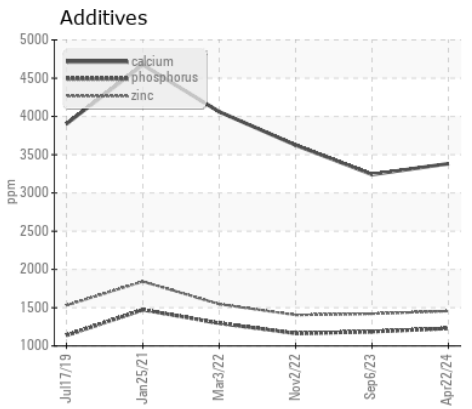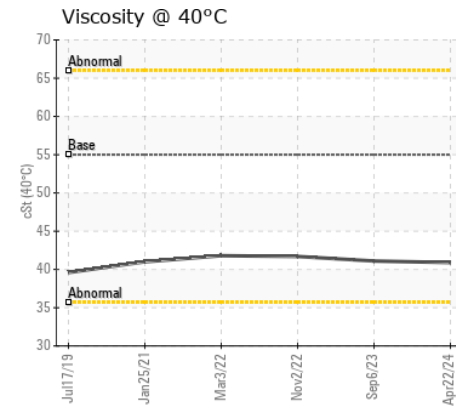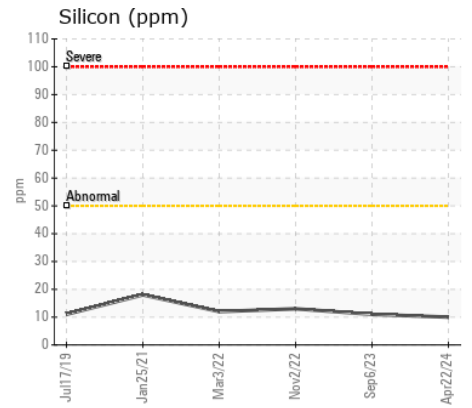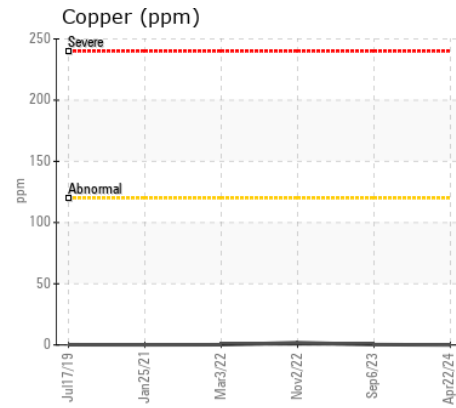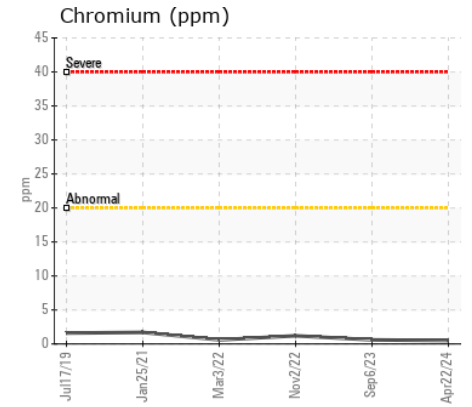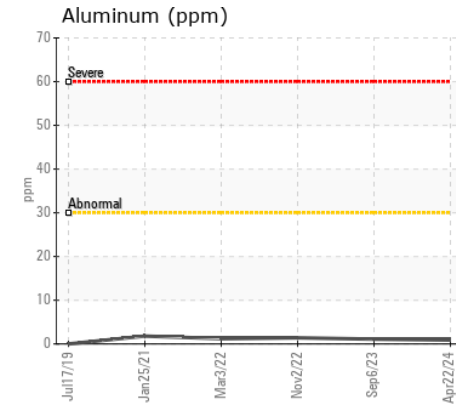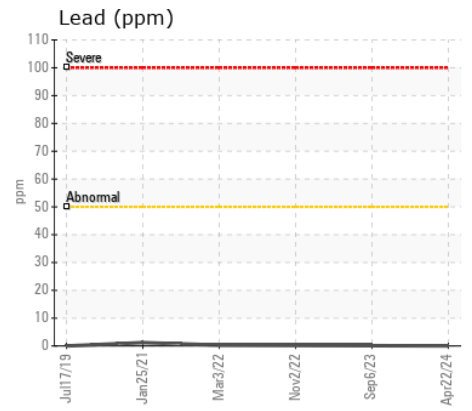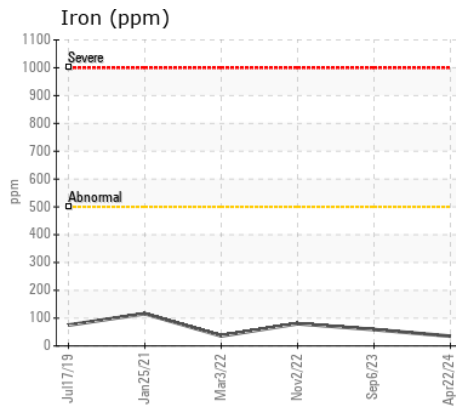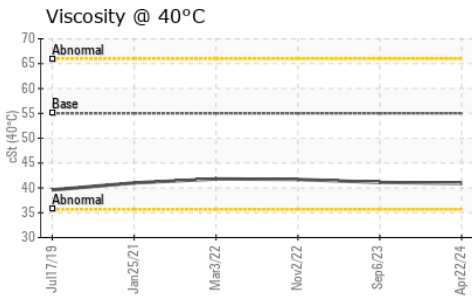

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP444750  
**Lab Number** : 06195766  
**Unique Number** : 11057889  
**Test Package** : MOB 1

**Received** : 30 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 31 May 2024 - Wes Davis

**RIPA AND ASSOCIATES**  
 10149 FISHER AVENUE  
 TAMPA, FL  
 US 33619

Contact: PM Services  
 PMServices@ripaconstruction.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: