



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area

[APTIM]

Machine Id

VOLVO A30G 740273

Component

Bogie/Center Axle

Fluid

VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP437085	VCP417082	VCP364494
Sample Date		Client Info		25 Apr 2024	22 Aug 2023	01 Sep 2022
Machine Age	hrs	Client Info		11987	11091	10152
Oil Age	hrs	Client Info		3000	4000	2000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	295	437	218
Chromium	ppm	ASTM D5185m	>20	3	5	3
Nickel	ppm	ASTM D5185m	>10	3	4	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	5	2
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	22	20	17
Tin	ppm	ASTM D5185m	>20	1	1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	MODER	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	23	10
Potassium	ppm	ASTM D5185m	>20	2	0	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m		3	1	0
Boron	ppm	ASTM D5185m	111	76	57	120
Barium	ppm	ASTM D5185m	0.0	0	0	2
Molybdenum	ppm	ASTM D5185m	0.9	2	2	1
Manganese	ppm	ASTM D5185m	0.0	6	7	5
Magnesium	ppm	ASTM D5185m	39	<1	0	<1
Calcium	ppm	ASTM D5185m	93	147	32	35
Phosphorus	ppm	ASTM D5185m	920	1788	1706	1888
Zinc	ppm	ASTM D5185m	104	63	15	22
Sulfur	ppm	ASTM D5185m	20179	28488	24618	31252
Visc @ 40°C	cSt	ASTM D445	333	58.2	59.7	60.0

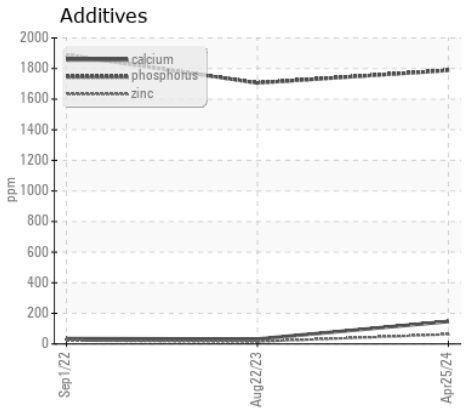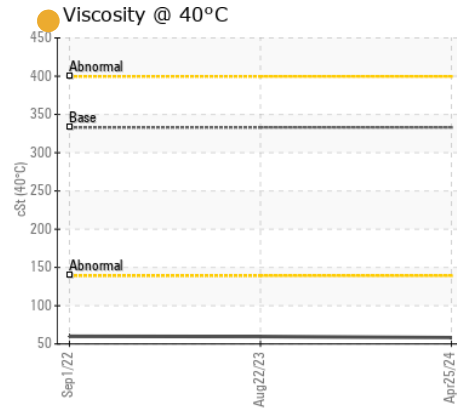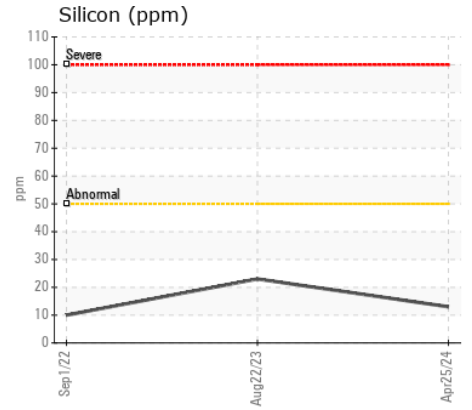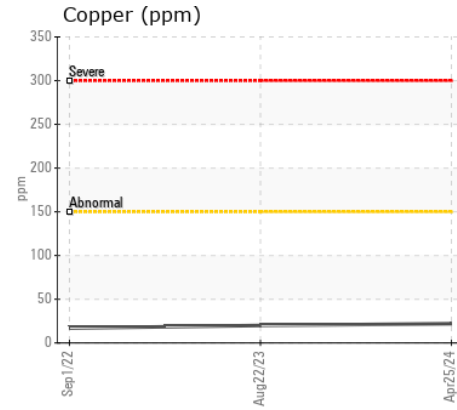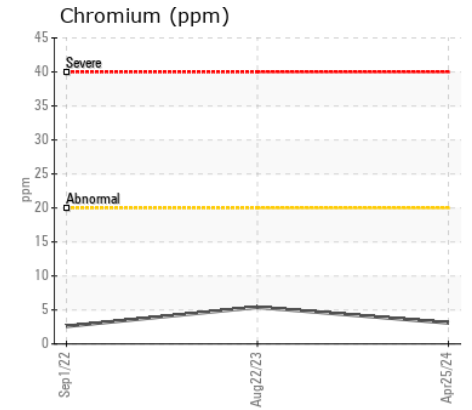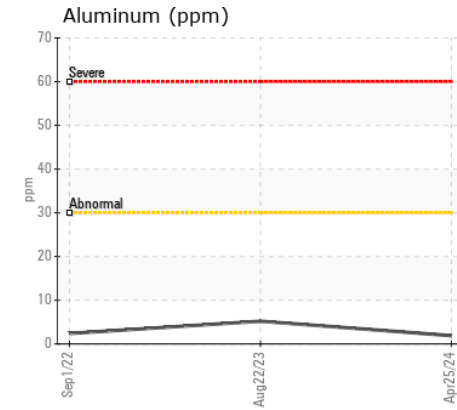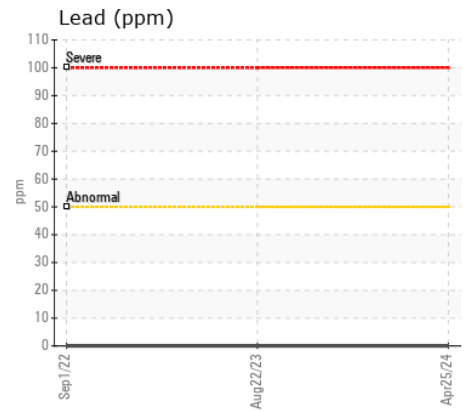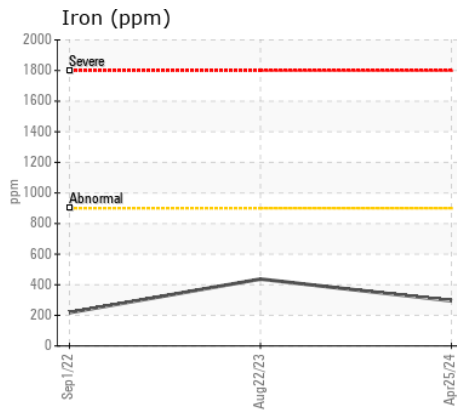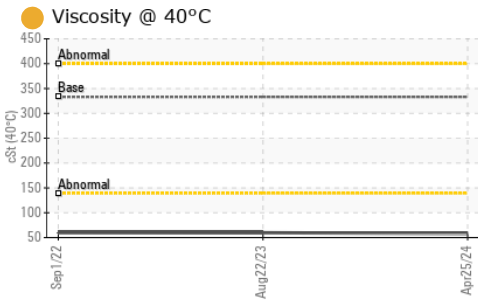

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP437085
Lab Number : 06195770
Unique Number : 11057893
Test Package : MOB 1

Received : 30 May 2024
Tested : 31 May 2024
Diagnosed : 01 Jun 2024 - Don Baldrige

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)