



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L580 080458-1760
Component
Splitter Box
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LHMC165935	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	hrs	Client Info		88	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	44	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	7	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>30	0	---	---
Copper	ppm	ASTM D5185m	>20	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	4	---	---
Potassium	ppm	ASTM D5185m	>20	305	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	8	---	---
Boron	ppm	ASTM D5185m	400	234	---	---
Barium	ppm	ASTM D5185m	200	10	---	---
Molybdenum	ppm	ASTM D5185m	12	16	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	12	10	---	---
Calcium	ppm	ASTM D5185m	150	91	---	---
Phosphorus	ppm	ASTM D5185m	1650	1942	---	---
Zinc	ppm	ASTM D5185m	125	48	---	---
Sulfur	ppm	ASTM D5185m	22500	28948	---	---
Visc @ 40°C	cSt	ASTM D445	143	164	---	---

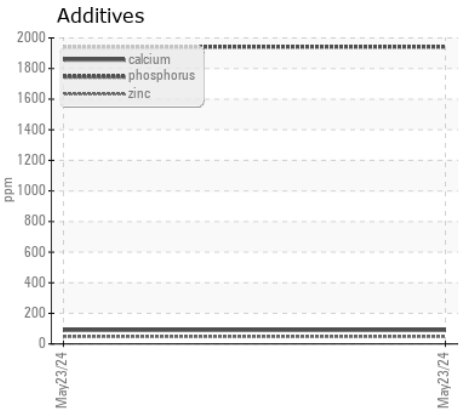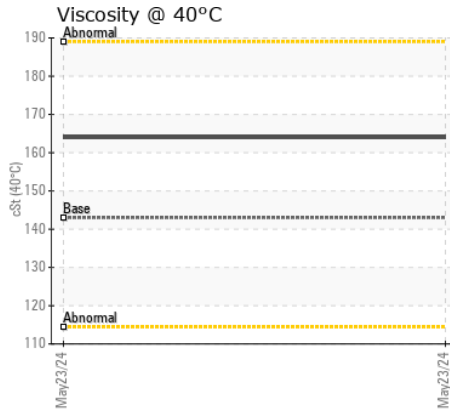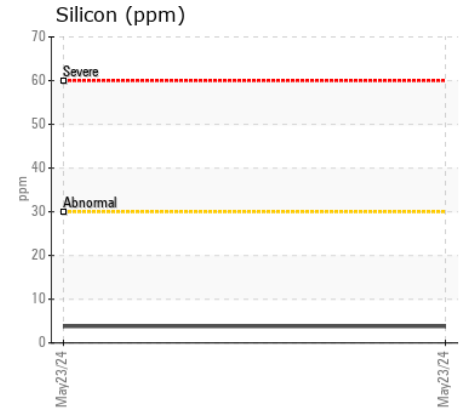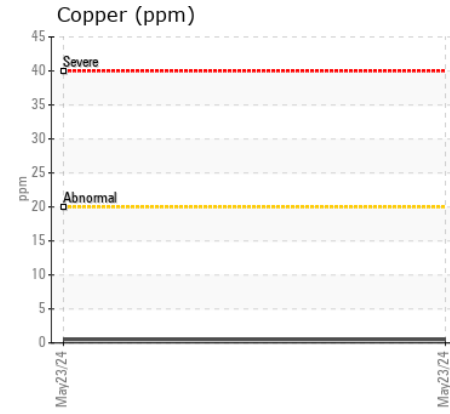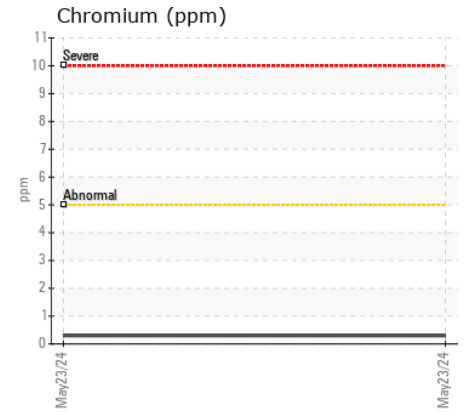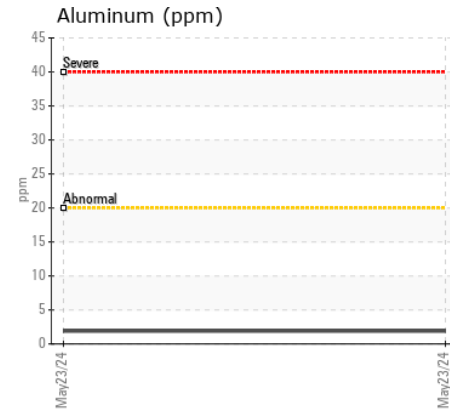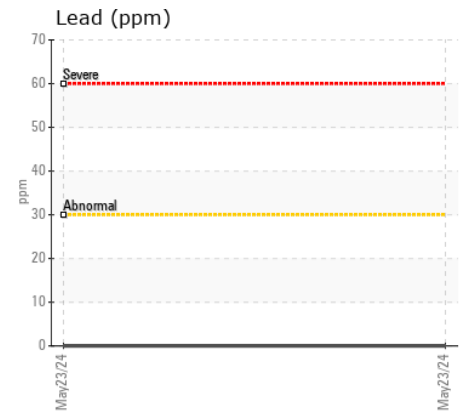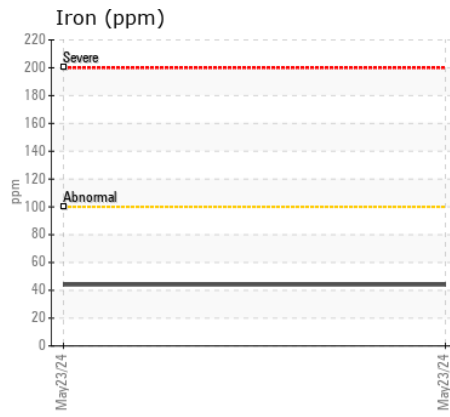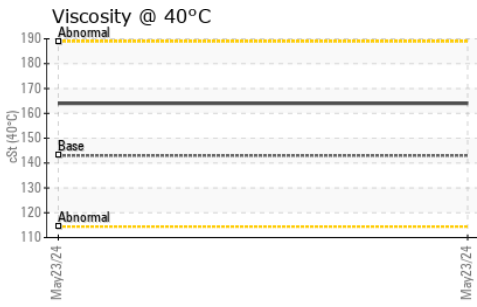

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LHMC165935
Lab Number : 06195811
Unique Number : 11057934
Test Package : MOB 1

Received : 30 May 2024
Tested : 31 May 2024
Diagnosed : 02 Jun 2024 - Don Baldrige

AMERICAN STATE EQUIPMENT CO.
 2055 SOUTH 108TH STREET
 MILWAUKEE, WI
 US 53227
 Contact: RAY SCHMIDT
 RSCHMIDT@AMSTATE.COM
 T: (414)234-0854
 F: (414)541-1892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)