



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**GENE NEAL**  
Component  
**Starboard Reduction Gear**  
Fluid  
**CHEVRON GEAR COMPOUND EP 220 (135 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0067179</b>	MW0067134	MW0067127
Sample Date		Client Info		<b>14 May 2024</b>	21 Apr 2024	30 Mar 2024
Machine Age	hrs	Client Info		<b>30185</b>	29685	29216
Oil Age	hrs	Client Info		<b>30185</b>	29685	29216
Filter Age	hrs	Client Info		<b>186</b>	398	472
Oil Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Filter Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>17</b>	19	17
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m	>100	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>2</b>	5	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	6	5
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Boron	ppm	ASTM D5185m		<b>14</b>	14	12
Barium	ppm	ASTM D5185m		<b>1</b>	2	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	2	2
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>7</b>	3	2
Calcium	ppm	ASTM D5185m		<b>105</b>	86	84
Phosphorus	ppm	ASTM D5185m		<b>232</b>	254	242
Zinc	ppm	ASTM D5185m		<b>23</b>	8	8
Sulfur	ppm	ASTM D5185m		<b>7445</b>	8414	7752
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.46</b>	0.43	0.43
Visc @ 40°C	cSt	ASTM D445	209	<b>213</b>	214	217

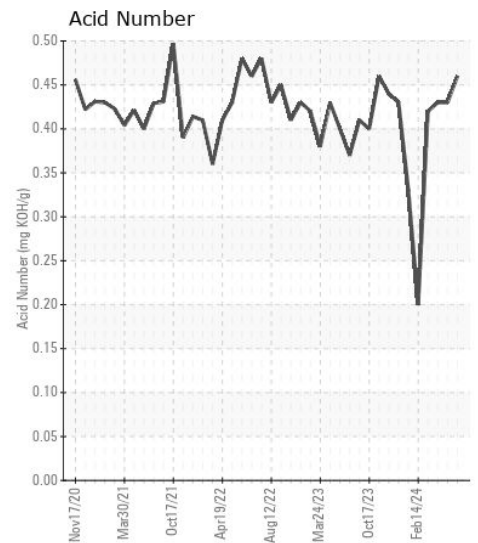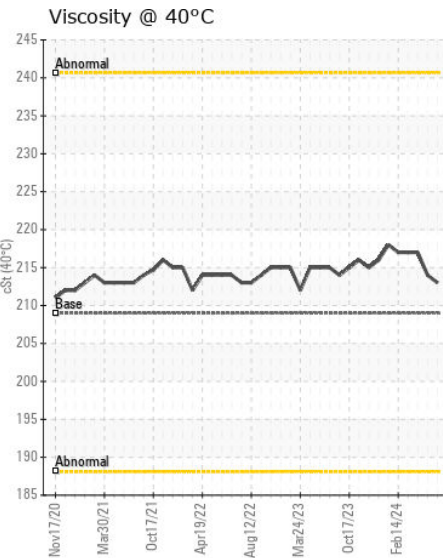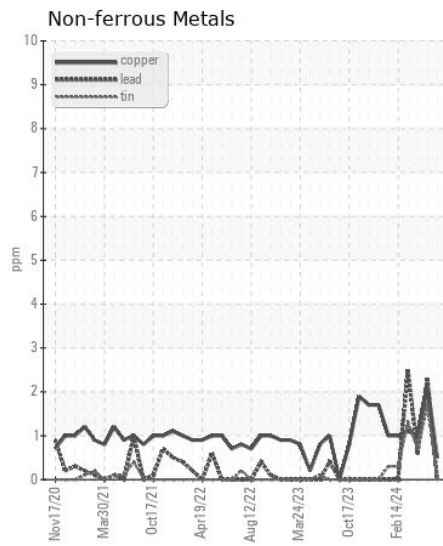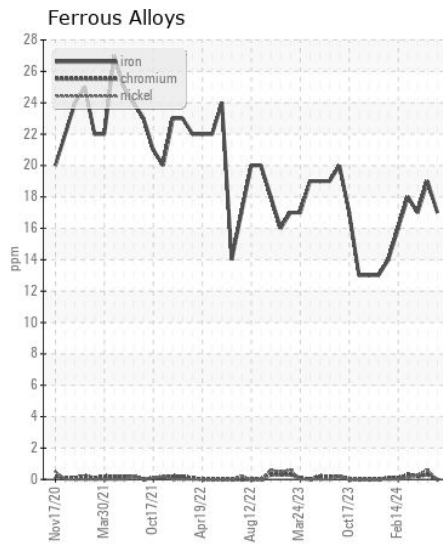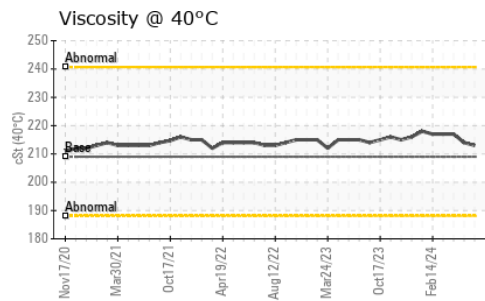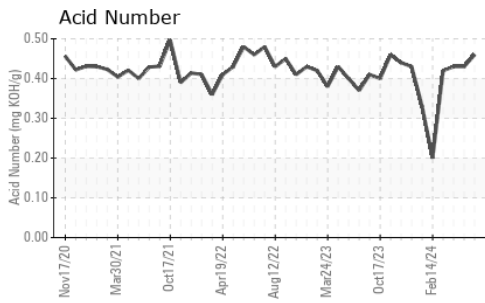

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0067179  
**Lab Number** : 06195988  
**Unique Number** : 11058111  
**Test Package** : MAR 2

**Received** : 30 May 2024  
**Tested** : 02 Jun 2024  
**Diagnosed** : 02 Jun 2024 - Wes Davis

**MAGNOLIA MARINE TRANSPORT**  
 697 HAINING ROAD  
 VICKSBURG, MS  
 US 39183  
 Contact: MMT MAINTENANCE PLANNERS  
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: (601)638-8028