



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH W900B TRUCK 7 (S/N MR464957)

Component
Transmission

Fluid
TRC 999 S&F 50W (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06196001	---	---
Sample Date		Client Info		13 Apr 2024	---	---
Machine Age	mls	Client Info		244742	---	---
Oil Age	mls	Client Info		62075	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>350	47	---	---
Chromium	ppm	ASTM D5185m	>4	<1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>600	68	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>55	10	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		17	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		117	---	---
Calcium	ppm	ASTM D5185m		2590	---	---
Phosphorus	ppm	ASTM D5185m		1081	---	---
Zinc	ppm	ASTM D5185m		1167	---	---
Sulfur	ppm	ASTM D5185m		6269	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.90	---	---
Visc @ 40°C	cSt	ASTM D445	230	199	---	---
Visc @ 100°C	cSt	ASTM D445	19.2	17.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270		96	---	---

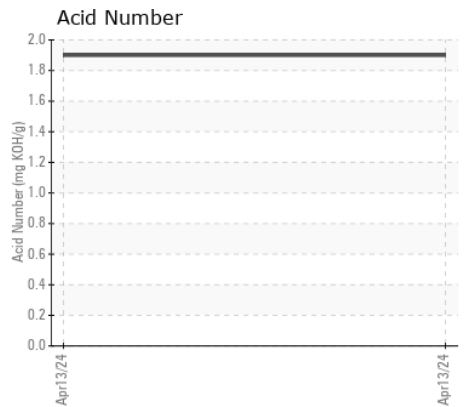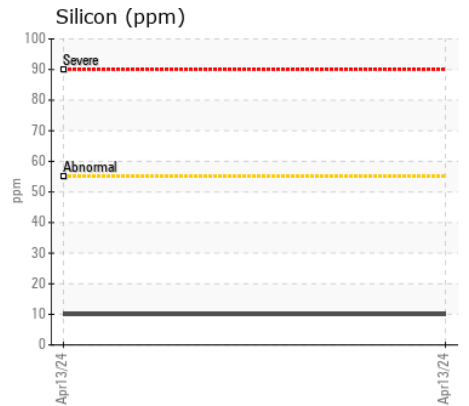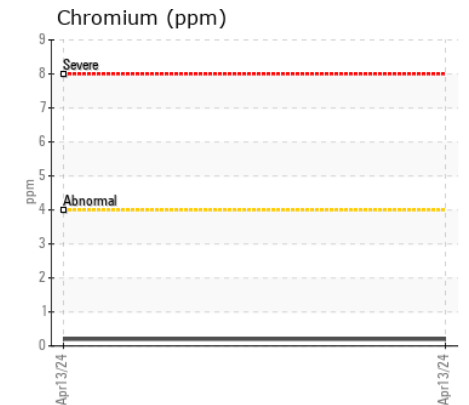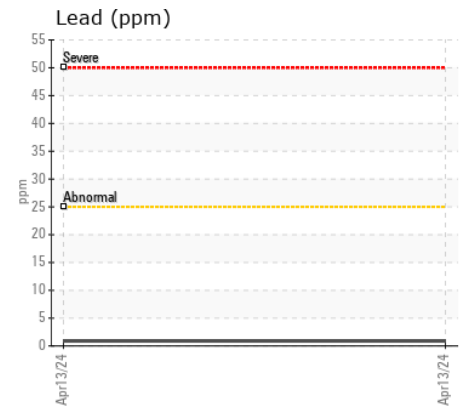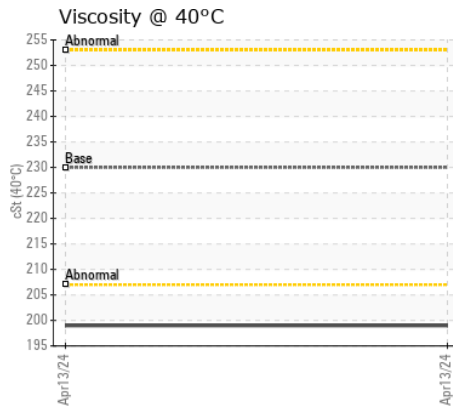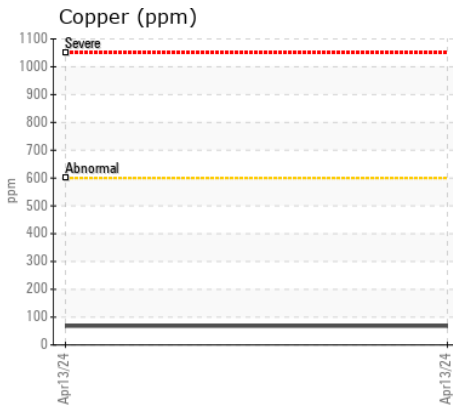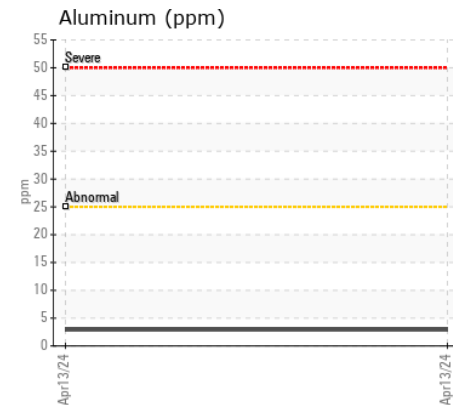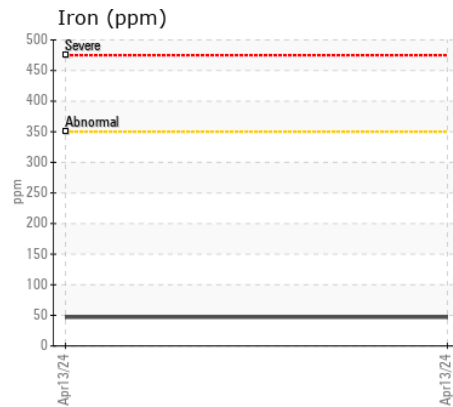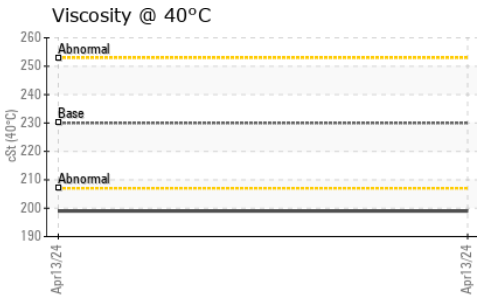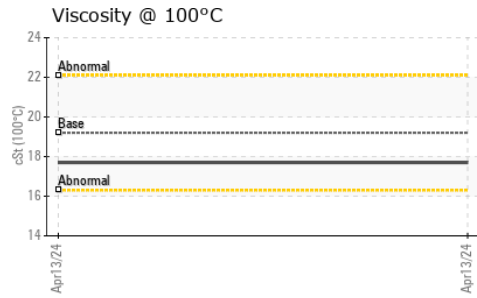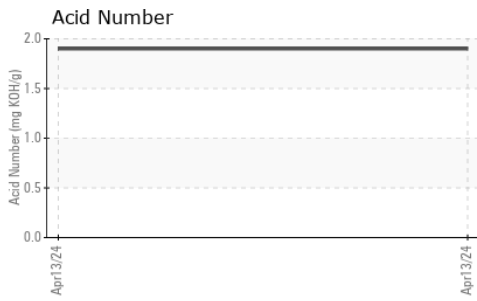

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06196001
Lab Number : 06196001
Unique Number : 11058124
Test Package : MOB 2 (Additional Tests: KV100, VI)

Received : 30 May 2024
Tested : 02 Jun 2024
Diagnosed : 02 Jun 2024 - Don Baldrige

KASKI LOGGING
 22411 HE CEDAR CREEK RD
 AMBOY, WA
 US 98601
 Contact: NATHAN BYRD

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: