



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 744K 1DW744KXKKF693860
Component
Transmission (Manual)
Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0215854	JR0118474	---
Sample Date		Client Info		29 May 2024	18 Apr 2022	---
Machine Age	hrs	Client Info		1029	1029	---
Oil Age	hrs	Client Info		1029	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	22	17	---
Iron	ppm	ASTM D5185m	>200	46	22	---
Chromium	ppm	ASTM D5185m	>5	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>7	0	<1	---
Aluminum	ppm	ASTM D5185m	>25	<1	1	---
Lead	ppm	ASTM D5185m	>45	<1	1	---
Copper	ppm	ASTM D5185m	>225	16	13	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	23	23	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	4	---
Boron	ppm	ASTM D5185m	10	23	24	---
Barium	ppm	ASTM D5185m	10	1	0	---
Molybdenum	ppm	ASTM D5185m	10	0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	100	105	95	---
Calcium	ppm	ASTM D5185m	3500	2995	3287	---
Phosphorus	ppm	ASTM D5185m	1150	914	976	---
Zinc	ppm	ASTM D5185m	1150	1130	1129	---
Sulfur	ppm	ASTM D5185m	5000	3720	3224	---
Visc @ 40°C	cSt	ASTM D445	48	46.6	49.1	---

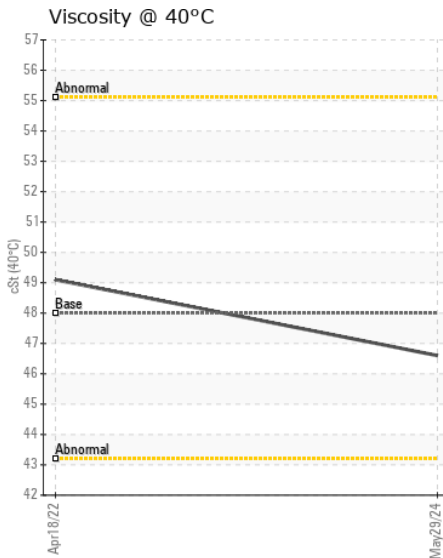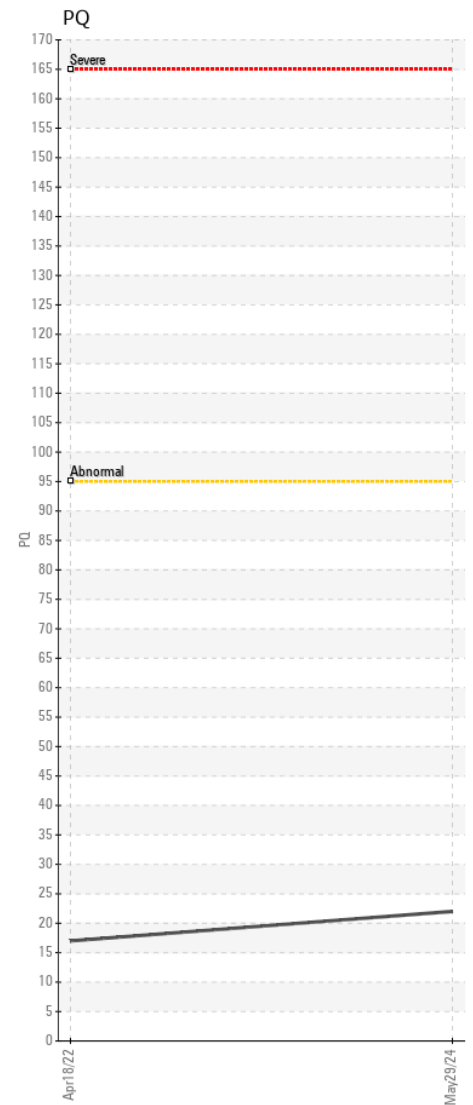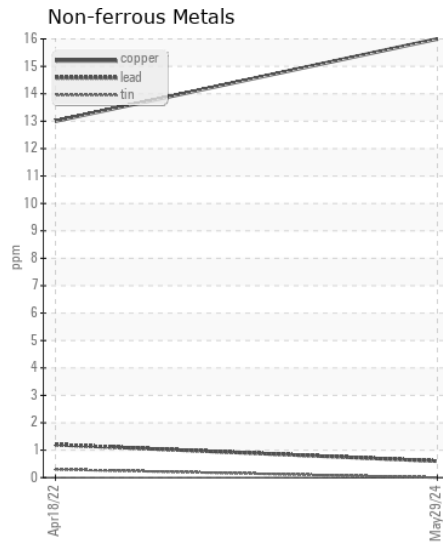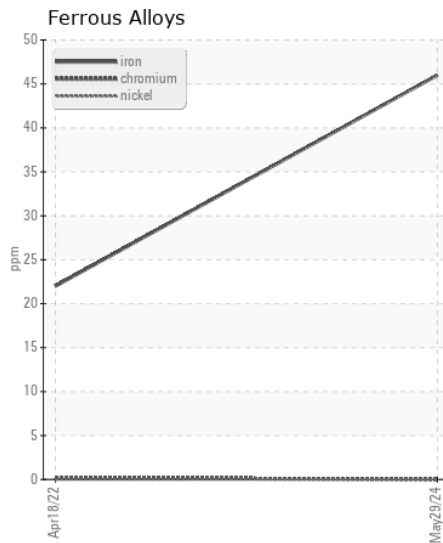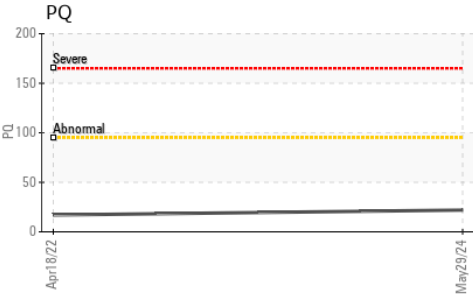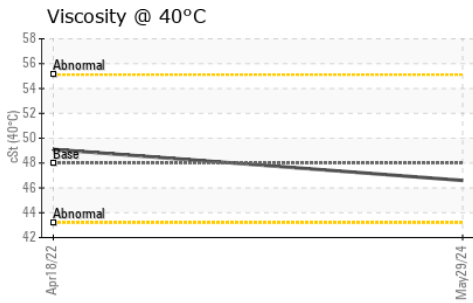

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0215854

Lab Number : 06196036

Unique Number : 11058159

Test Package : CONST (Additional Tests: PQ)

Received : 30 May 2024

Tested : 02 Jun 2024

Diagnosed : 02 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO

411 SOUTH REGIONAL ROAD

GREENSBORO, NC

US 27409

Contact: NICK GALLAHER

NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556