



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L120G 30056
Component
Diesel Engine
Fluid
PETRO CANADA 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP425526	VCP425537	VCP395384
Sample Date		Client Info		24 May 2024	07 Apr 2024	25 May 2023
Machine Age	hrs	Client Info		16845	16575	15962
Oil Age	hrs	Client Info		300	300	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	15	11
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	7	4
Lead	ppm	ASTM D5185m	>20	<1	0	0
Copper	ppm	ASTM D5185m	>15	2	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	3	3
Potassium	ppm	ASTM D5185m	>20	2	<1	3
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	5.8	6.9	6.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.1	17.9	18.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	<1
Boron	ppm	ASTM D5185m		10	16	45
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		53	60	50
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		806	927	785
Calcium	ppm	ASTM D5185m		994	1067	1276
Phosphorus	ppm	ASTM D5185m		938	1037	1011
Zinc	ppm	ASTM D5185m		1081	1199	1242
Sulfur	ppm	ASTM D5185m		3157	3381	3863
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	14.1	13.2
Base Number (BN)	mg KOH/g	ASTM D2896		8.9	8.8	8.9
Visc @ 100°C	cSt	ASTM D445		11.4	11.4	11.3

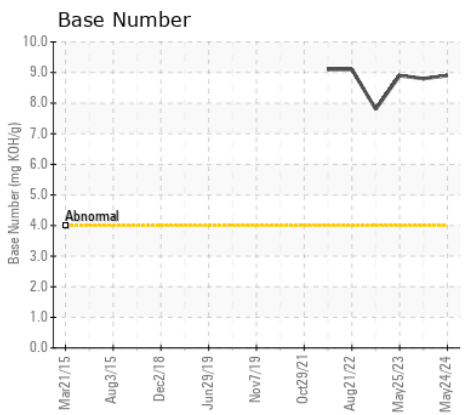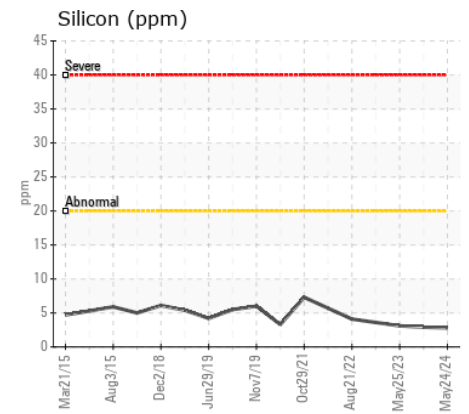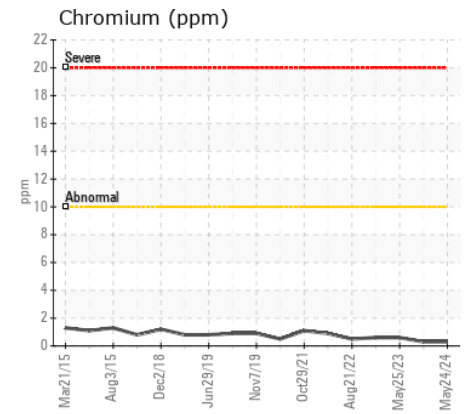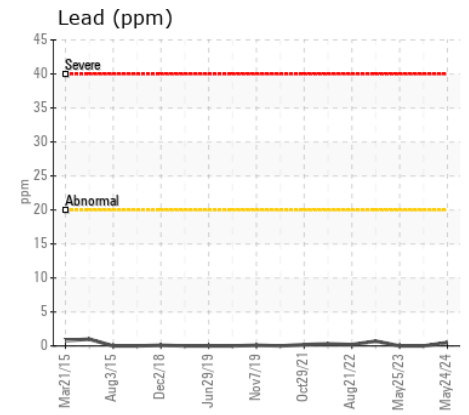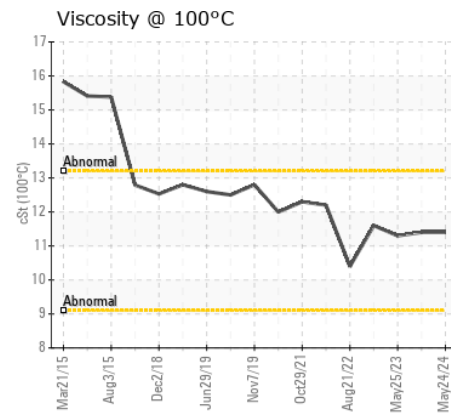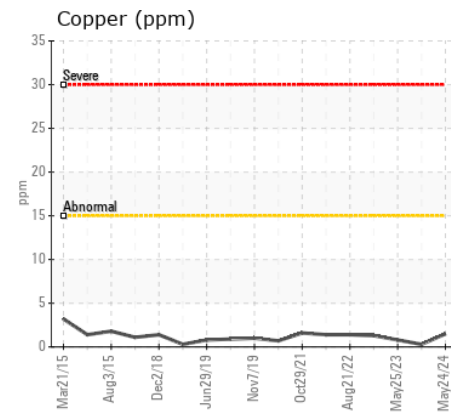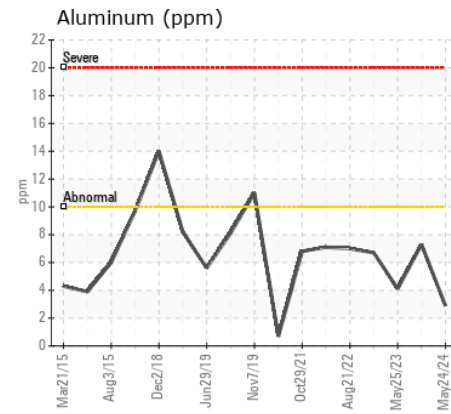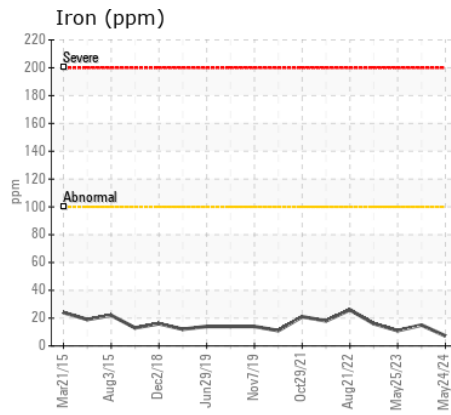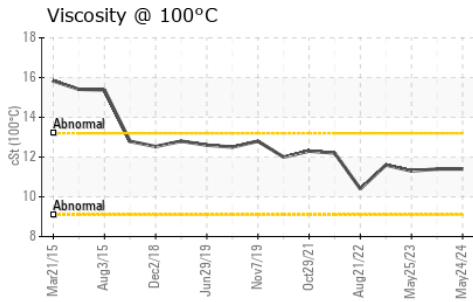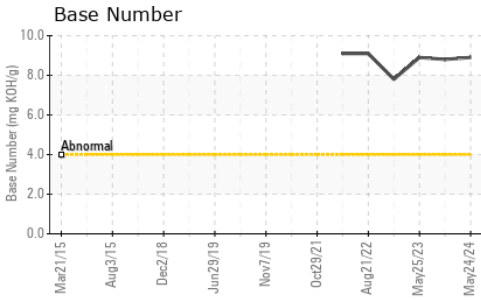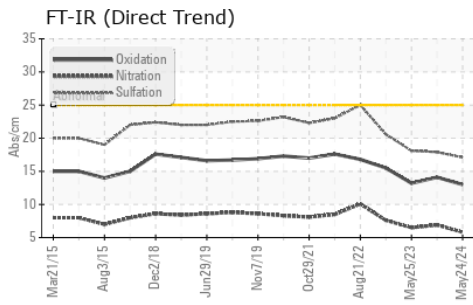

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP425526 **Received** : 30 May 2024
Lab Number : 06196098 **Tested** : 31 May 2024
Unique Number : 11058221 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

WOODBED CORP dba DELULLO TRUCKING
 1022 DELAUM RD
 ST MARYS, PA
 US 15857
 Contact: CRYSTAL WILLIAMS
 crystal@woodbed.com
 T: (814)834-1464
 F: (814)834-9588

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)