



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[05W46514]
 Machine Id
THE DISCO TECH (S/N 2071169356)
 Component
Port Main Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0839381	---	---
Sample Date		Client Info		22 May 2024	---	---
Machine Age	hrs	Client Info		1096	---	---
Oil Age	hrs	Client Info		200	---	---
Filter Age	hrs	Client Info		200	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	19	---	---
Chromium	ppm	ASTM D5185m	>8	1	---	---
Nickel	ppm	ASTM D5185m	>2	4	---	---
Titanium	ppm	ASTM D5185m	>3	<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>15	1	---	---
Lead	ppm	ASTM D5185m	>18	4	---	---
Copper	ppm	ASTM D5185m	>80	19	---	---
Tin	ppm	ASTM D5185m	>14	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		1.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	---	---
Boron	ppm	ASTM D5185m	250	121	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	6	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	84	---	---
Calcium	ppm	ASTM D5185m	3000	2120	---	---
Phosphorus	ppm	ASTM D5185m	1150	921	---	---
Zinc	ppm	ASTM D5185m	1350	1091	---	---
Sulfur	ppm	ASTM D5185m	4250	3553	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.5	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.8	---	---

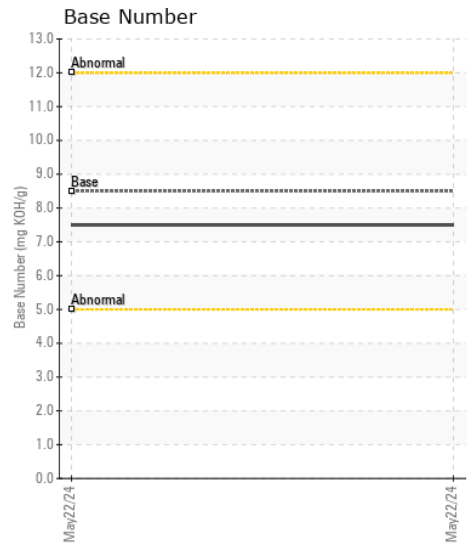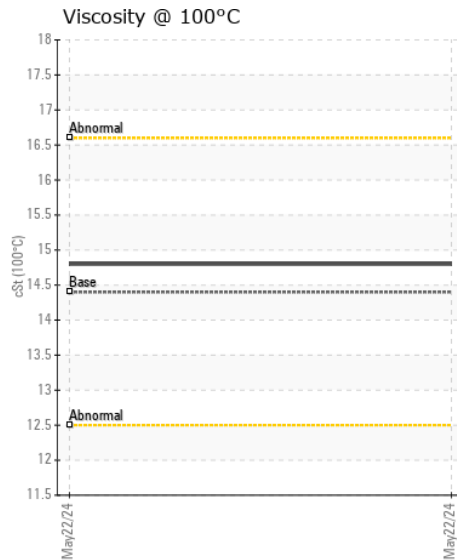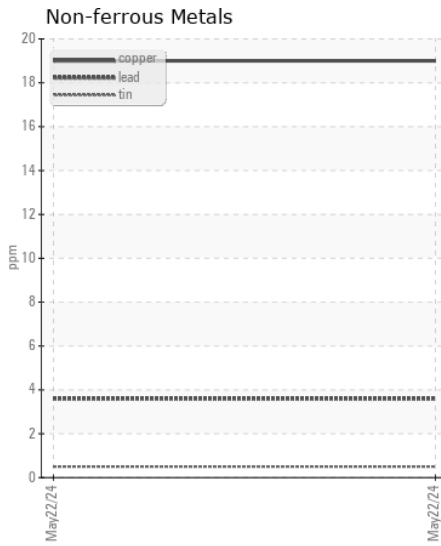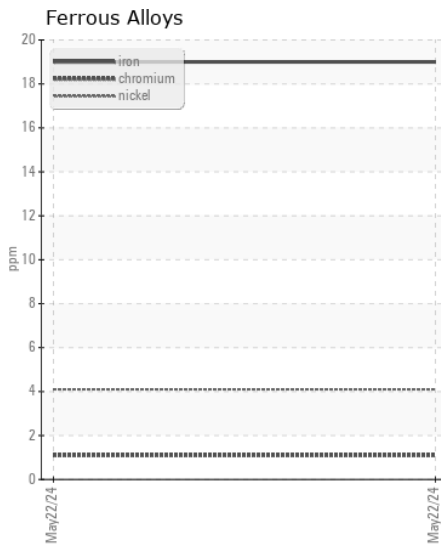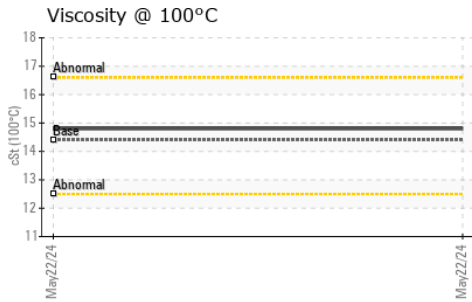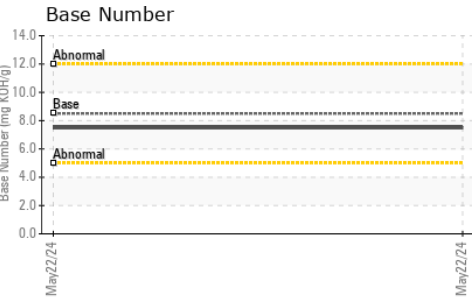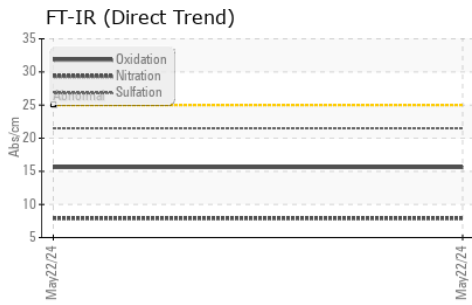

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0839381 **Received** : 30 May 2024
Lab Number : 06196143 **Tested** : 31 May 2024
Unique Number : 11058266 **Diagnosed** : 02 Jun 2024 - Don Baldrige
Test Package : MAR 2

G&G TECHNOLOGIES
 6 GRANDVIEW ST
 COVENTRY, RI
 US 02816
 Contact: GENKO GENEV
 g2@ggtechnologies.com
 T: (401)295-4000
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)