



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
31261
 Component
Diesel Engine
 Fluid
SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | WC0924420 | WC0882662 | WC0846417 |
| Sample Date | | Client Info | | 20 May 2024 | 05 Feb 2024 | 19 Oct 2023 |
| Machine Age | hrs | Client Info | | 711 | 482 | 260 |
| Oil Age | hrs | Client Info | | 750 | 500 | 0 |
| Filter Age | hrs | Client Info | | 750 | 500 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | ABNORMAL |

WEAR

Metal levels are typical for a new component breaking in.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 11 | 14 | 25 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | 0 | 1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | 1 | 4 |
| Lead | ppm | ASTM D5185m | >40 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >330 | <1 | 3 | 14 |
| Tin | ppm | ASTM D5185m | >15 | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 9 | 15 | ▲ 46 |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 2 | 2 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | 0.3 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.1 | 0.1 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.7 | 7.6 | 8.8 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 18.7 | 19.9 | 32.6 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|--------|
| Sodium | ppm | ASTM D5185m | >57 | 2 | 5 | 4 |
| Boron | ppm | ASTM D5185m | | 167 | 203 | 117 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185m | | 8 | 7 | 37 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | 2 |
| Magnesium | ppm | ASTM D5185m | | 772 | 818 | 783 |
| Calcium | ppm | ASTM D5185m | | 1353 | 1491 | 1742 |
| Phosphorus | ppm | ASTM D5185m | | 813 | 821 | 804 |
| Zinc | ppm | ASTM D5185m | | 893 | 1006 | 1000 |
| Sulfur | ppm | ASTM D5185m | | 4385 | 3968 | 2626 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 18.1 | 20.3 | 38.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 9.2 | 7.0 | 6.3 |
| Visc @ 100°C | cSt | ASTM D445 | 14.5 | 13.2 | 13.2 | ● 12.1 |

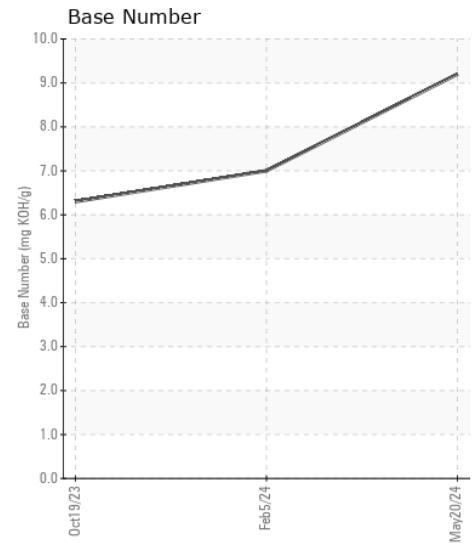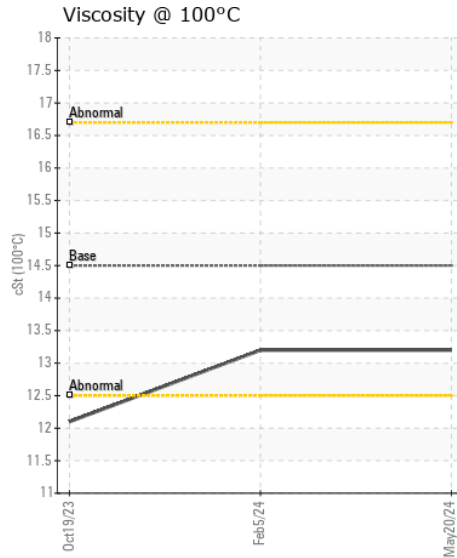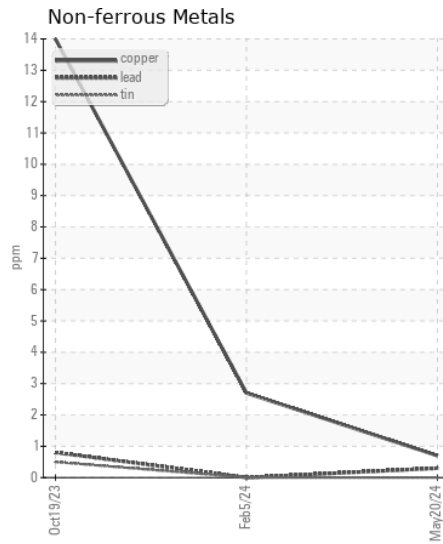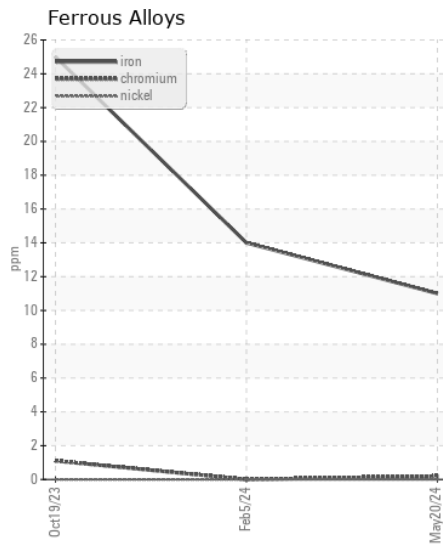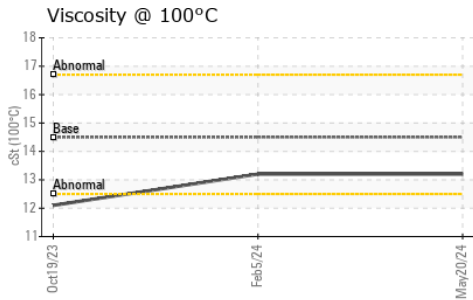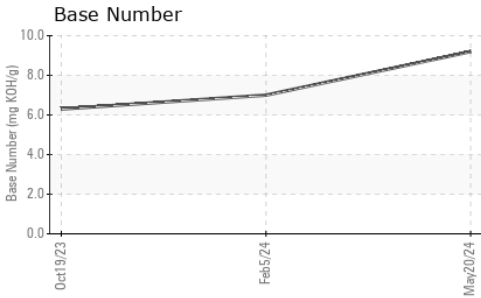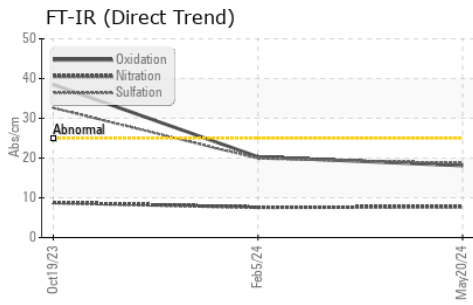

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0924420 **Received** : 30 May 2024
Lab Number : 06196150 **Tested** : 31 May 2024
Unique Number : 11058273 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560

Contact: SCOTT SULLIVAN
 ssullivan@sullivaneastern.com
 T: (919)484-8993
 F: (919)484-2136

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)