



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1782
Component
Diesel Engine
Fluid
SAE 0W20 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HRE0000169	WC0860430	WC0827091
Sample Date		Client Info		30 May 2024	29 Oct 2023	09 Aug 2023
Machine Age	mls	Client Info		71035	66849	62755
Oil Age	mls	Client Info		6000	6000	6000
Filter Age	mls	Client Info		6000	6000	6000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	18	18	17
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	2	<1	<1
Aluminum	ppm	ASTM D5185m	>20	6	4	3
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	2	3	4
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		1	<1	2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	30	24	23
Potassium	ppm	ASTM D5185m	>20	<1	2	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	10.6	10.6	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	22.0	21.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	2	1
Boron	ppm	ASTM D5185m		33	12	12
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		282	261	238
Manganese	ppm	ASTM D5185m		5	<1	<1
Magnesium	ppm	ASTM D5185m		522	439	525
Calcium	ppm	ASTM D5185m		1346	1248	1464
Phosphorus	ppm	ASTM D5185m		676	569	670
Zinc	ppm	ASTM D5185m		815	817	901
Sulfur	ppm	ASTM D5185m		2354	1967	2596
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.4	17.9	16.7
Base Number (BN)	mg KOH/g	ASTM D2896		3.7	3.4	4.0
Visc @ 100°C	cSt	ASTM D445	8.3	8.8	10.0	10.6

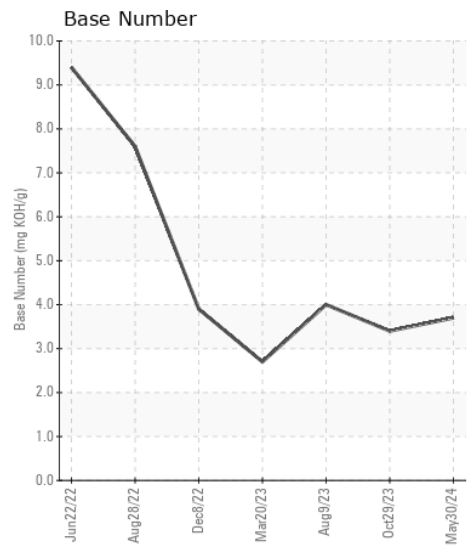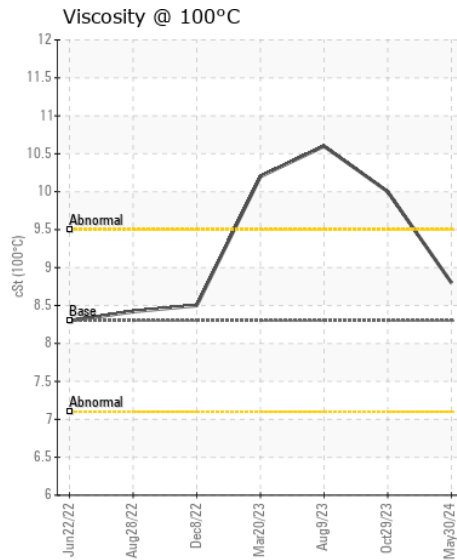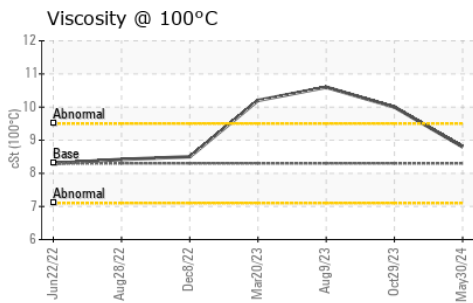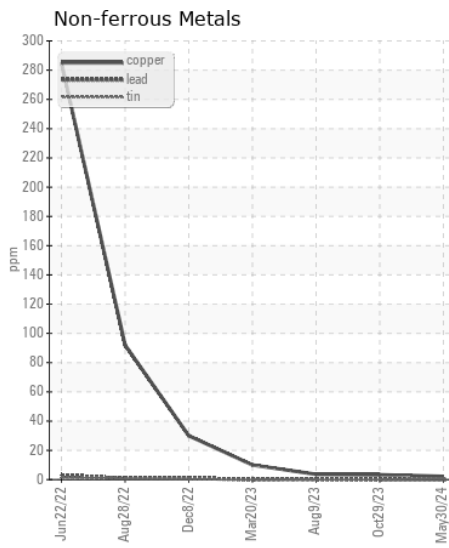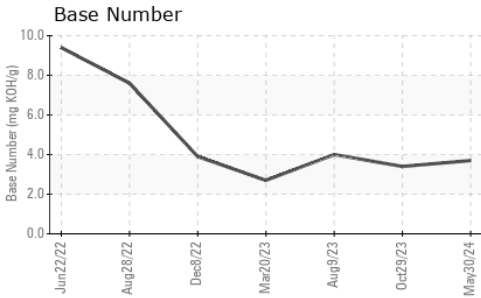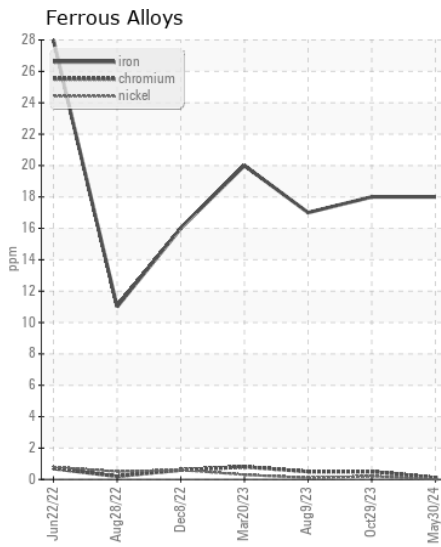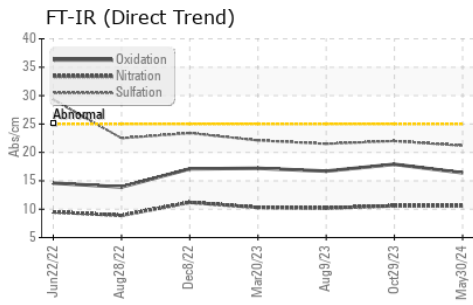

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HRE0000169
Lab Number : 06196202
Unique Number : 11058325
Test Package : FLEET
Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Don Baldrige

TOWN OF CHAPEL HILL
 6900 MILLHOUSE RD
 CHAPEL HILL, NC
 US 27516
 Contact: Lisa DePasqua
 ldepasqua@townofchapelhill.org
 T: (919)696-4941
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)