



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>SEVERE</b>
FLUID CONDITION	<b>SEVERE</b>

Machine Id  
**9905**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0887557</b>	WC0860356	WC0790604
Sample Date		Client Info		<b>28 May 2024</b>	06 Nov 2023	07 Mar 2023
Machine Age	mls	Client Info		<b>369666</b>	363976	358469
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>SEVERE</b>	SEVERE	SEVERE

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>30</b>	19	18
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION









There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>15</b>	8	8
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	1
Fuel	%	ASTM D3524	>5	<b>▲ 22.7</b>	▲ 9.0	▲ 15.5
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	1.1	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.4</b>	11.8	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.8</b>	25.4	24.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>158	<b>43</b>	5	1
Boron	ppm	ASTM D5185m	250	<b>57</b>	26	20
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>70</b>	63	65
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>273</b>	288	235
Calcium	ppm	ASTM D5185m	3000	<b>1516</b>	1534	1612
Phosphorus	ppm	ASTM D5185m	1150	<b>891</b>	837	844
Zinc	ppm	ASTM D5185m	1350	<b>1045</b>	990	1042
Sulfur	ppm	ASTM D5185m	4250	<b>3014</b>	2423	2838
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.6</b>	24.0	21.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.0</b>	5.5	5.8
Visc @ 100°C	cSt	ASTM D445	14.4	<b>▲ 9.1</b>	▲ 10.2	▲ 10.1

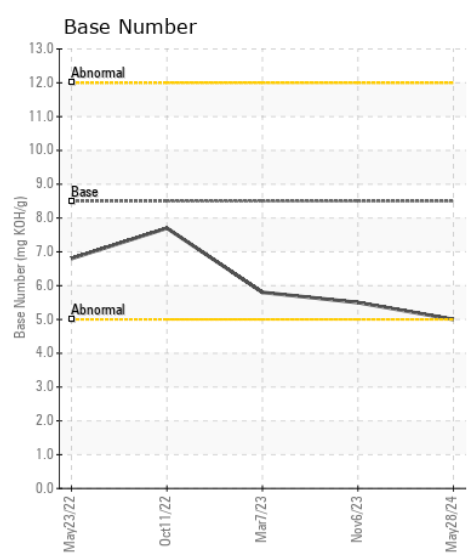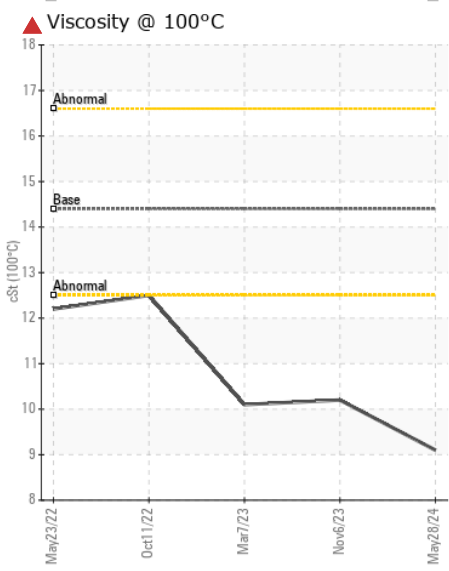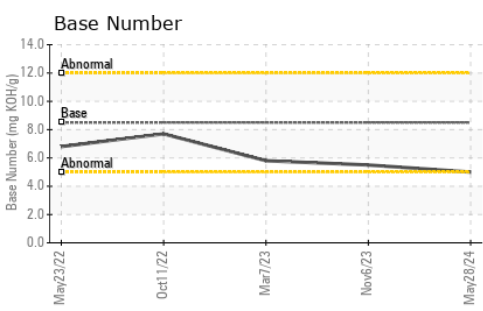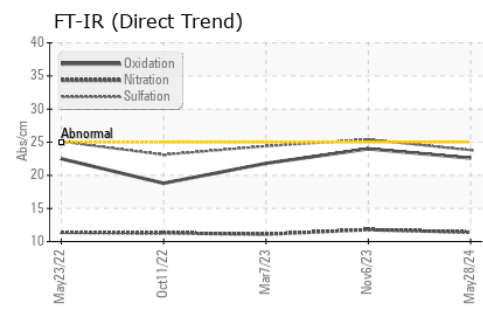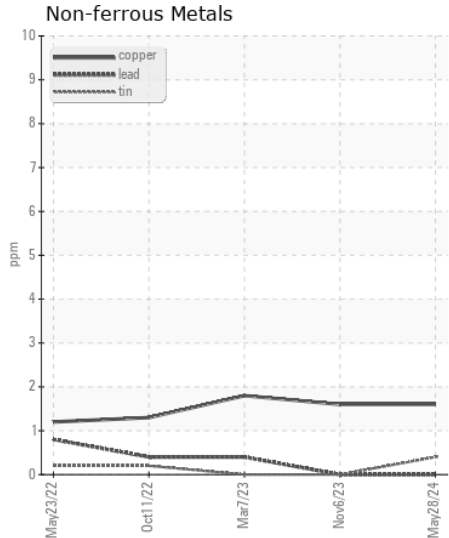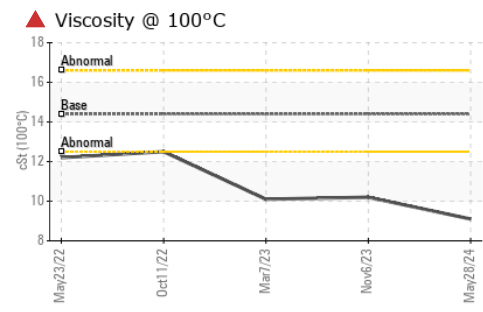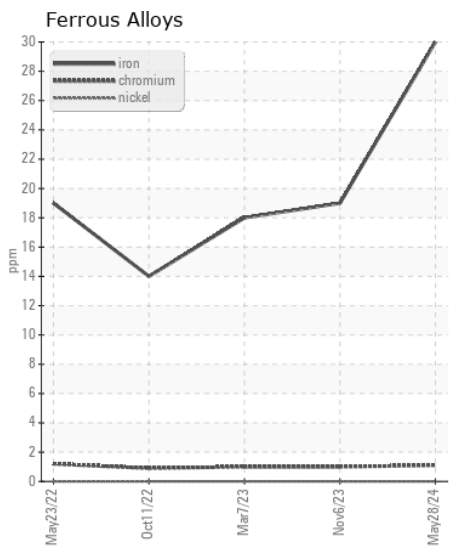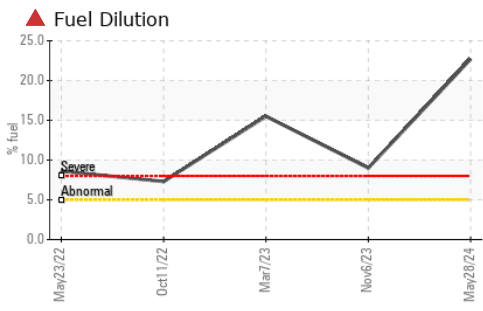

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0887557 **Received** : 31 May 2024  
**Lab Number** : 06196205 **Tested** : 05 Jun 2024  
**Unique Number** : 11058328 **Diagnosed** : 05 Jun 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**TOWN OF CHAPEL HILL**  
 6900 MILLHOUSE RD  
 CHAPEL HILL, NC  
 US 27516  
 Contact: Lisa DePasqua  
 ldepasqua@townofchapelhill.org  
 T: (919)696-4941  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)