



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
SIGNET CHALLENGER
Component
Starboard Genset
Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0051955	MW0051875	MW0051869
Sample Date		Client Info		22 May 2024	05 Mar 2024	30 Dec 2023
Machine Age	hrs	Client Info		12972	12839	12762
Oil Age	hrs	Client Info		205	82	500
Filter Age	hrs	Client Info		205	82	500
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	6	5	32
Chromium	ppm	ASTM D5185m	>4	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>12	2	3	3
Lead	ppm	ASTM D5185m	>17	0	<1	8
Copper	ppm	ASTM D5185m	>70	<1	1	5
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	5	8
Potassium	ppm	ASTM D5185m	>20	<1	3	2
Fuel		WC Method	>4.0	<1.0	<1.0	▲ 3.2
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.4
Nitration	Abs/cm	*ASTM D7624	>20	6.0	5.4	10.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	19.9	23.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	0
Boron	ppm	ASTM D5185m	151	363	367	259
Barium	ppm	ASTM D5185m	0.4	0	2	6
Molybdenum	ppm	ASTM D5185m	250	95	101	153
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	0	556	514	895
Calcium	ppm	ASTM D5185m	2046	1366	1407	1812
Phosphorus	ppm	ASTM D5185m	1043	911	846	856
Zinc	ppm	ASTM D5185m	943	1049	1031	1142
Sulfur	ppm	ASTM D5185m	5012	3176	3005	3151
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.6	14.2	20.5
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	8.1	8.6	7.8
Visc @ 100°C	cSt	ASTM D445	14.4	12.4	12.6	▲ 11.9


FT-IR (Direct Trend)

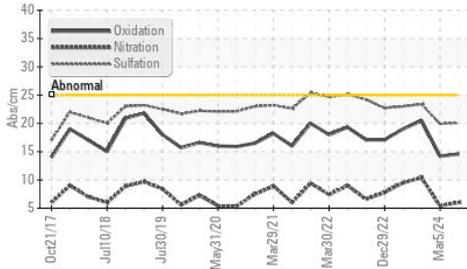


Base Number

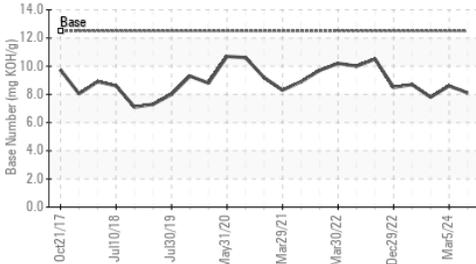


Viscosity @ 100°C

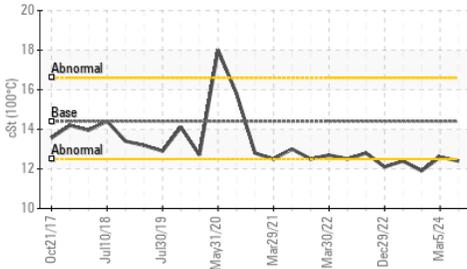


Ferrous Alloys

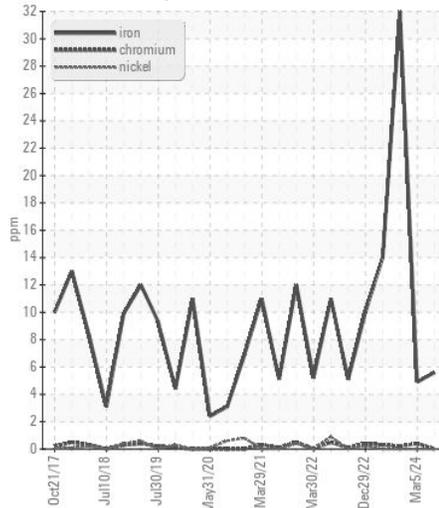


Non-ferrous Metals

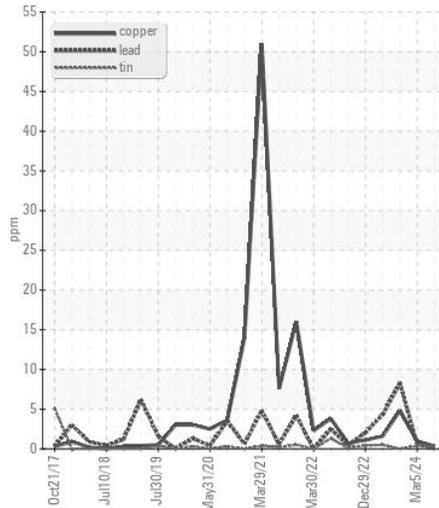

Viscosity @ 100°C

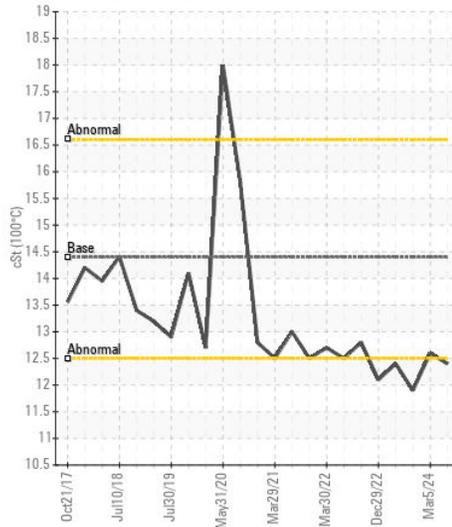

Base Number

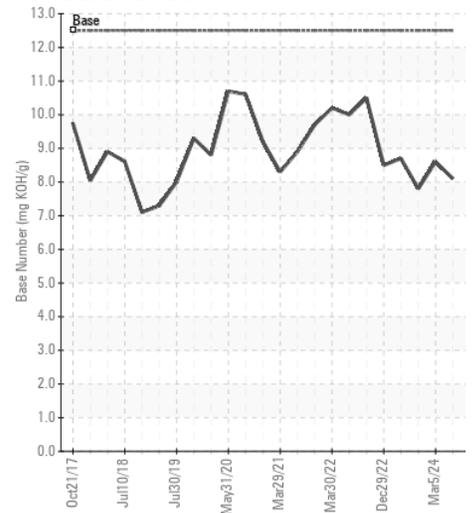

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0051955

Lab Number : 06196270

Unique Number : 11058393

Test Package : MAR 2

Received : 31 May 2024

Tested : 02 Jun 2024

Diagnosed : 02 Jun 2024 - Wes Davis

MARITIME COMPANY

3802 PORT RIVER RD

PASCAGOULA, MS

US 39567

Contact: TERRY SCUDDER

terry.scudder@signetmaritime.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (228)769-0629