



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
934025
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0122840	GFL0118851	GFL0114184
Sample Date		Client Info		27 May 2024	02 May 2024	11 Apr 2024
Machine Age	hrs	Client Info		2547	2386	2240
Oil Age	hrs	Client Info		161	2386	2240
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	12	48	40
Chromium	ppm	ASTM D5185m	>4	<1	3	2
Nickel	ppm	ASTM D5185m	>2	<1	▲ 3	3
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>9	4	▲ 10	8
Lead	ppm	ASTM D5185m	>30	1	6	2
Copper	ppm	ASTM D5185m	>35	3	10	10
Tin	ppm	ASTM D5185m	>4	<1	3	2
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>+100	6	12	10
Potassium	ppm	ASTM D5185m	>20	8	9	6
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.2	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.0	13.7	13.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.0	27.2	25.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	11	10
Boron	ppm	ASTM D5185m	50	23	4	7
Barium	ppm	ASTM D5185m	5	<1	0	1
Molybdenum	ppm	ASTM D5185m	50	55	67	63
Manganese	ppm	ASTM D5185m	0	1	5	4
Magnesium	ppm	ASTM D5185m	560	597	710	657
Calcium	ppm	ASTM D5185m	1510	1614	1780	1711
Phosphorus	ppm	ASTM D5185m	780	900	869	778
Zinc	ppm	ASTM D5185m	870	997	1074	1080
Sulfur	ppm	ASTM D5185m	2040	2829	2737	2588
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	24.9	22.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	7.2	3.1	3.5
Visc @ 100°C	cSt	ASTM D445	15.1	14.7	14.5	14.7


FT-IR (Direct Trend)

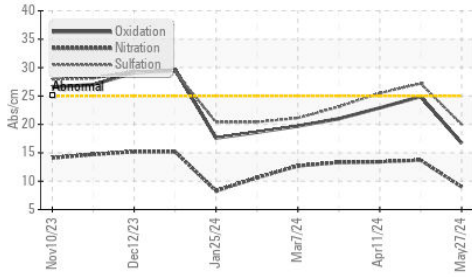


Ferrous Alloys

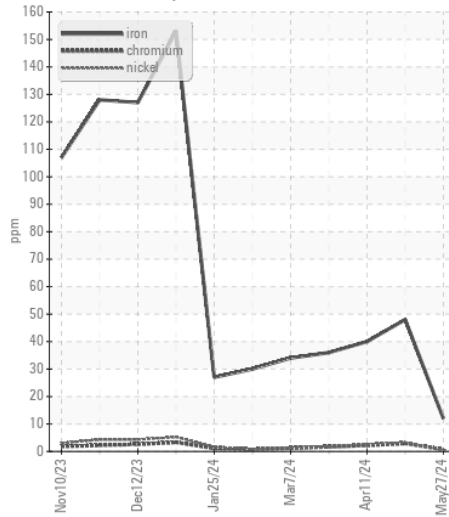


Base Number

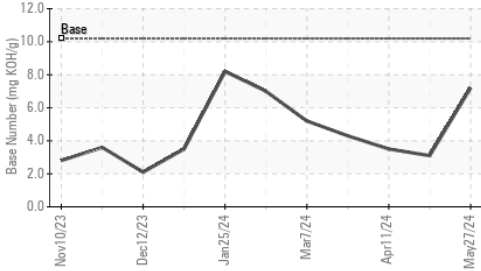


Non-ferrous Metals

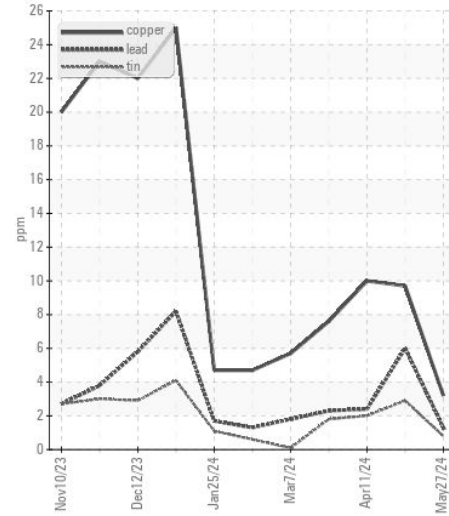


Viscosity @ 100°C

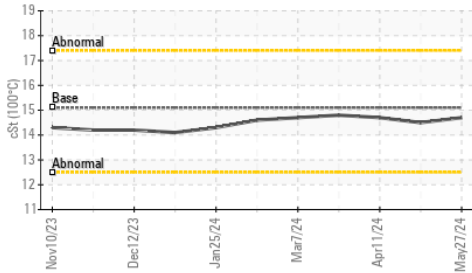

Viscosity @ 100°C

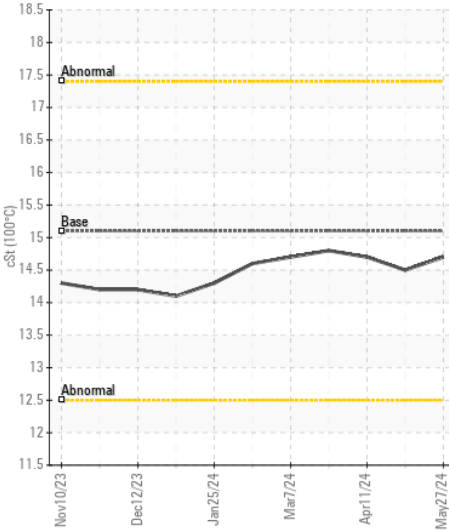

Base Number

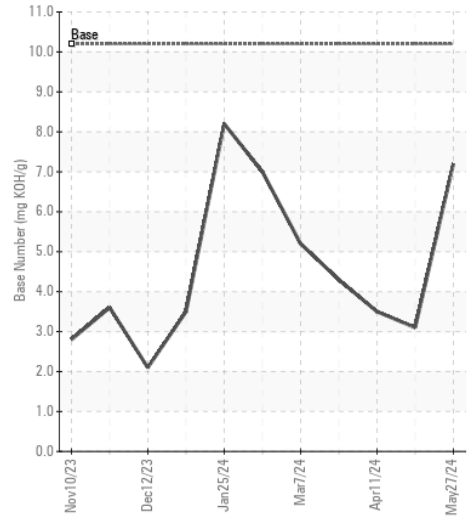

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122840
Lab Number : 06196344
Unique Number : 11058467
Test Package : FLEET

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Wes Davis

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: SARA PATRICK
 spatrick@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: