



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 644K 1DW644KZLGF674754
Component
Diesel Engine
Fluid
SHELL ROTELLA T 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201392	JR0201395	JR0201397
Sample Date		Client Info		06 Mar 2024	13 Feb 2024	28 Jan 2024
Machine Age	hrs	Client Info		25955	25748	25548
Oil Age	hrs	Client Info		207	200	216
Filter Age	hrs	Client Info		207	200	216
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	MARGINAL	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	10	11	21
Chromium	ppm	ASTM D5185m	>11	0	0	1
Nickel	ppm	ASTM D5185m	>5	<1	0	2
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>31	2	3	15
Lead	ppm	ASTM D5185m	>26	0	0	2
Copper	ppm	ASTM D5185m	>26	3	16	156
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	6	5	6
Potassium	ppm	ASTM D5185m	>20	2	4	25
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.8	6.9	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	18.5	18.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	12	29	178
Boron	ppm	ASTM D5185m	316	38	35	64
Barium	ppm	ASTM D5185m	0.0	0	0	<1
Molybdenum	ppm	ASTM D5185m	1.2	49	52	94
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	24	543	477	70
Calcium	ppm	ASTM D5185m	2292	1575	1622	2310
Phosphorus	ppm	ASTM D5185m	1064	1107	1086	1224
Zinc	ppm	ASTM D5185m	1160	1275	1249	1307
Sulfur	ppm	ASTM D5185m	4996	3600	3631	4549
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	15.0	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	9.8	9.5	8.7
Visc @ 100°C	cSt	ASTM D445	15.7	13.1	12.9	13.1


FT-IR (Direct Trend)

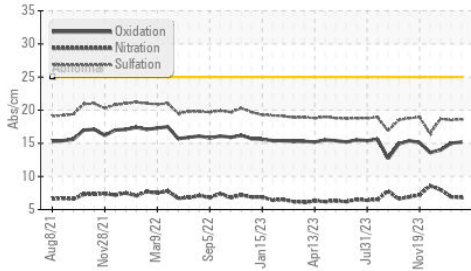


Base Number

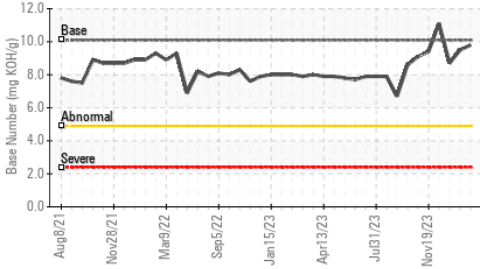


Viscosity @ 100°C

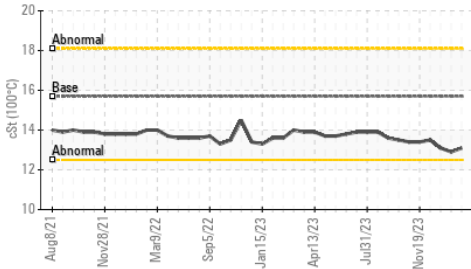


Ferrous Alloys

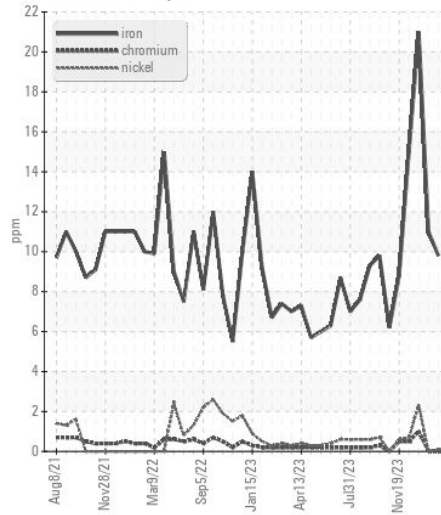


Non-ferrous Metals

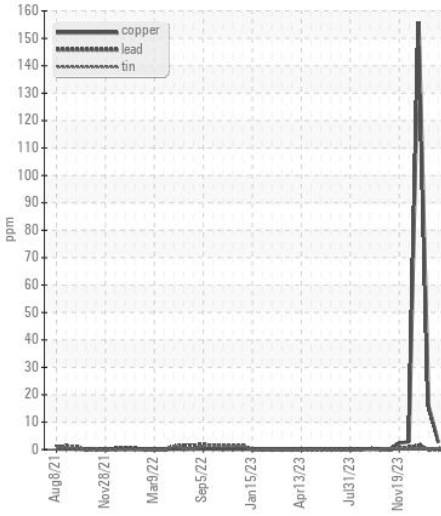

Viscosity @ 100°C

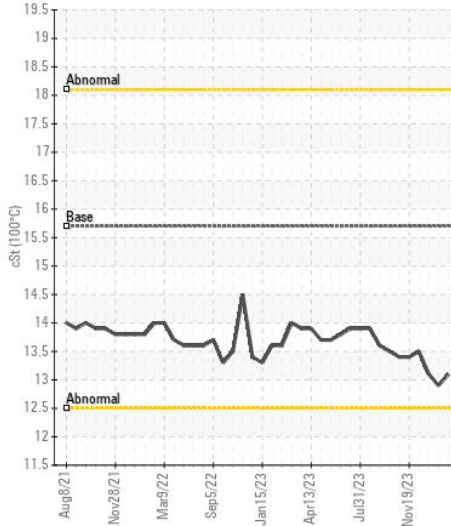

Base Number

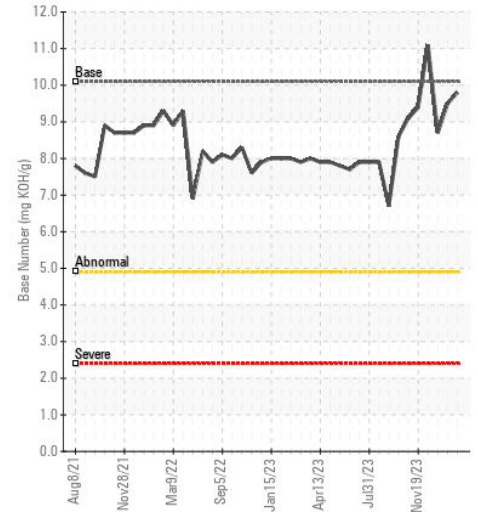

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0201392 **Received** : 31 May 2024
Lab Number : 06196370 **Tested** : 03 Jun 2024
Unique Number : 11058493 **Diagnosed** : 03 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

Baxter Healthcare - Wood Boiler Biomass
 2859 OLD LINVILLE RD
 MARION, NC
 US 28752
 Contact: RICKY STYLES
 ricky_styles@baxter.com
 T: (828)756-4946
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)