



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 892D-LC FF892DL006513

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (26 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0084561	JR0163020	---
Sample Date		Client Info		29 May 2024	09 Mar 2023	---
Machine Age	hrs	Client Info		2846	2846	---
Oil Age	hrs	Client Info		2846	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

The iron level has decreased, but is still abnormal. The lead level has decreased, but is still abnormal.

Iron	ppm	ASTM D5185m	>51	▲ 225	▲ 817	---
Chromium	ppm	ASTM D5185m	>11	2	10	---
Nickel	ppm	ASTM D5185m	>5	3	▲ 20	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	10	23	---
Lead	ppm	ASTM D5185m	>26	▲ 30	▲ 171	---
Copper	ppm	ASTM D5185m	>26	18	19	---
Tin	ppm	ASTM D5185m	>4	3	▲ 19	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION














There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	12	▲ 22	---
Potassium	ppm	ASTM D5185m	>20	5	0	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	▲ 3.8	---
Nitration	Abs/cm	*ASTM D7624	>20	8.1	18.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	36.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	18	26	---
Boron	ppm	ASTM D5185m		263	40	---
Barium	ppm	ASTM D5185m		<1	<1	---
Molybdenum	ppm	ASTM D5185m		231	103	---
Manganese	ppm	ASTM D5185m		2	6	---
Magnesium	ppm	ASTM D5185m		828	634	---
Calcium	ppm	ASTM D5185m		1431	1858	---
Phosphorus	ppm	ASTM D5185m		928	899	---
Zinc	ppm	ASTM D5185m		1036	1166	---
Sulfur	ppm	ASTM D5185m		3429	3903	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	33.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	10.2	6.1	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.5	16.5	---

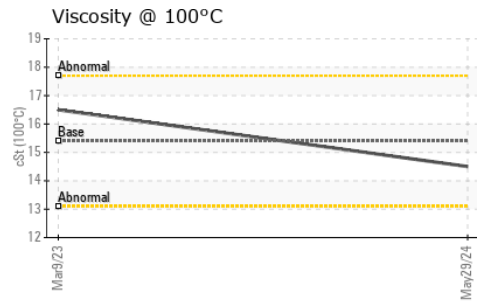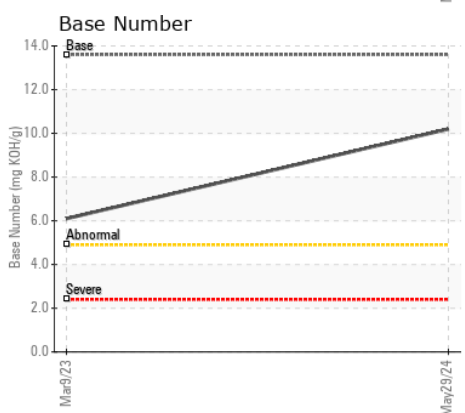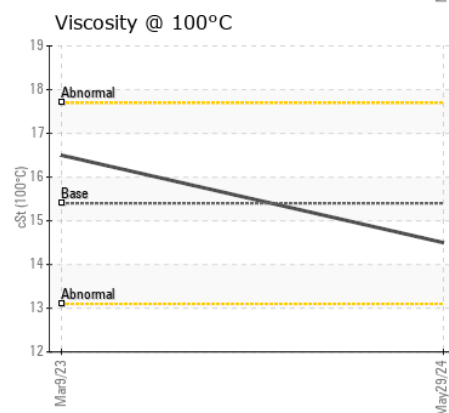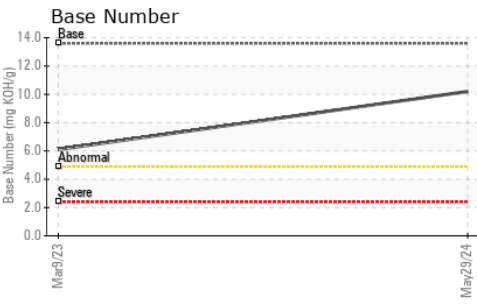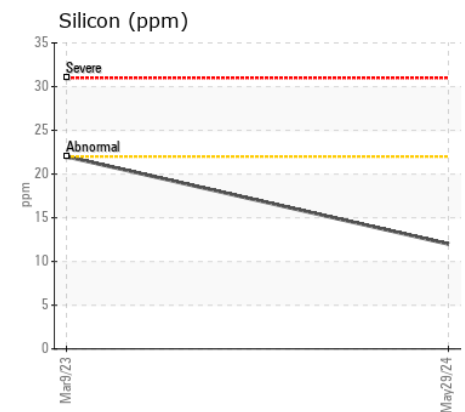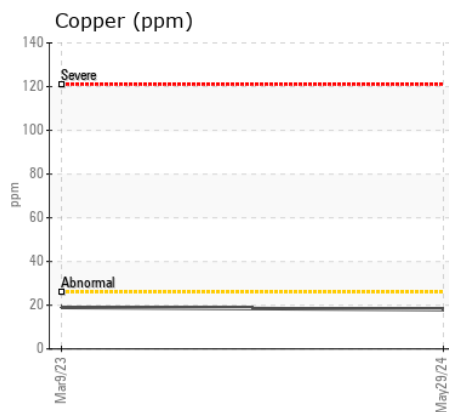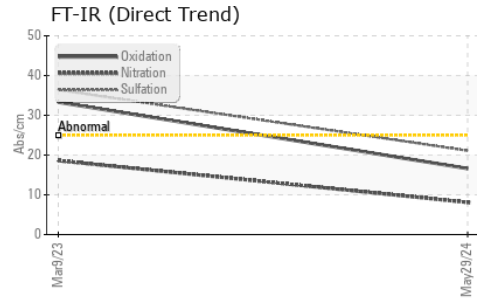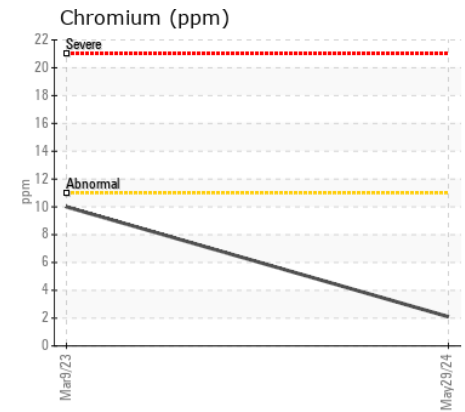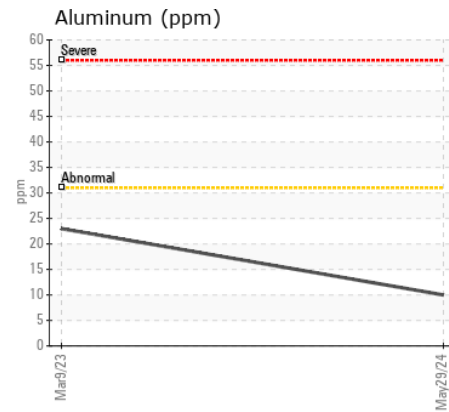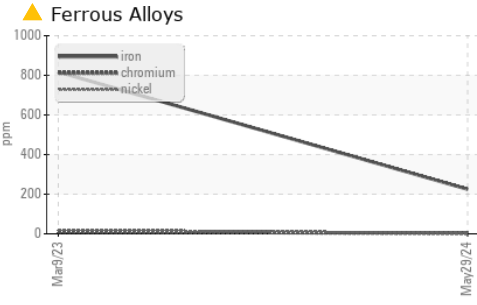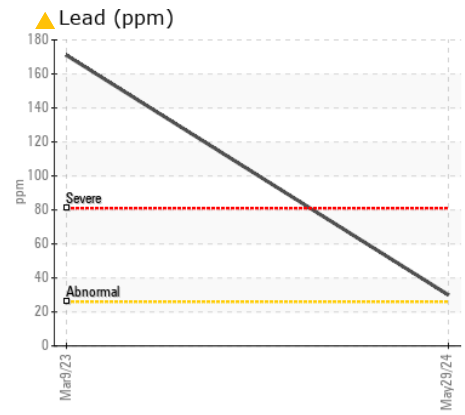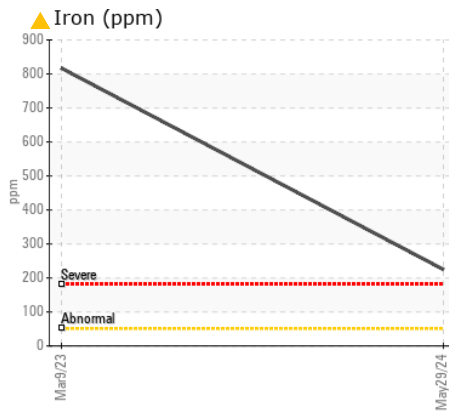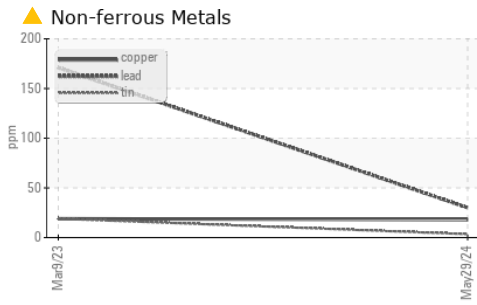

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0084561 **Received** : 31 May 2024
Lab Number : 06196381 **Tested** : 03 Jun 2024
Unique Number : 11058504 **Diagnosed** : 03 Jun 2024 - Don Baldrige
Test Package : MOBCE (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com

T: (703)631-8500

F: (703)631-4715