



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 644K 1DW644KPCA0630483
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (30 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213084	JRMC371843	JRMC358567
Sample Date		Client Info		30 May 2024	24 Feb 2014	12 Dec 2012
Machine Age	hrs	Client Info		26437	9287	6104
Oil Age	hrs	Client Info		0	500	500
Filter Age	hrs	Client Info		0	500	500
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	9	11	11
Chromium	ppm	ASTM D5185m	>11	0	<1	1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	3	3	3
Lead	ppm	ASTM D5185m	>26	0	0	1
Copper	ppm	ASTM D5185m	>26	0	0	<1
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	5	4	3
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	5.9	4.	6.
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	13.	17.
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	4	4
Boron	ppm	ASTM D5185m		451	10	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		90	42	46
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		412	1066	1211
Calcium	ppm	ASTM D5185m		1375	1092	811
Phosphorus	ppm	ASTM D5185m		1076	1111	1045
Zinc	ppm	ASTM D5185m		1247	1335	1348
Sulfur	ppm	ASTM D5185m		3693	2281	2976
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	7.	10.
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.4	10.94	9.90
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.25	14.79


FT-IR (Direct Trend)

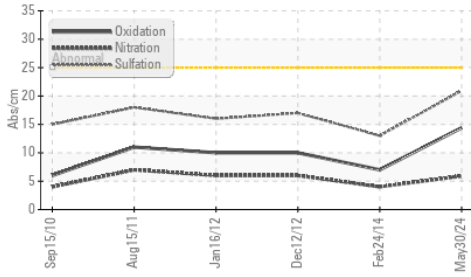


Ferrous Alloys

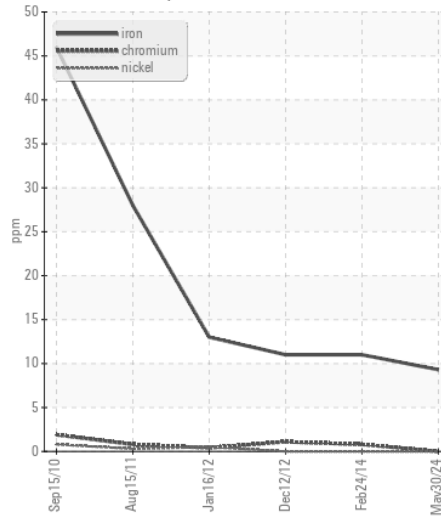


Base Number

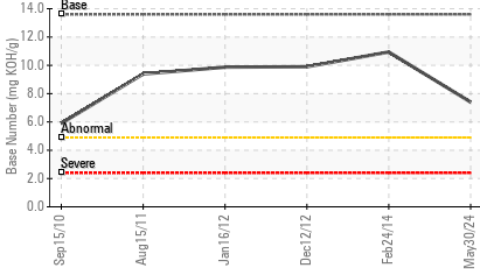


Non-ferrous Metals

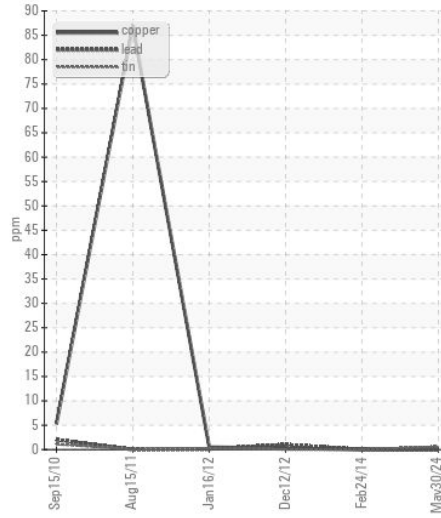


Viscosity @ 100°C

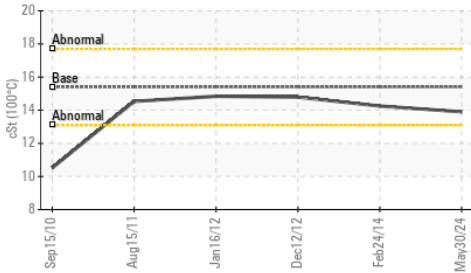

Viscosity @ 100°C

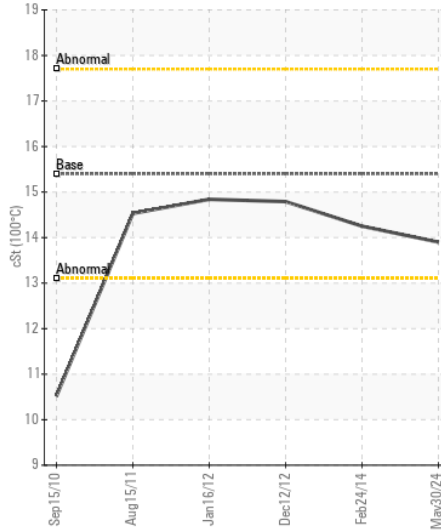

Base Number

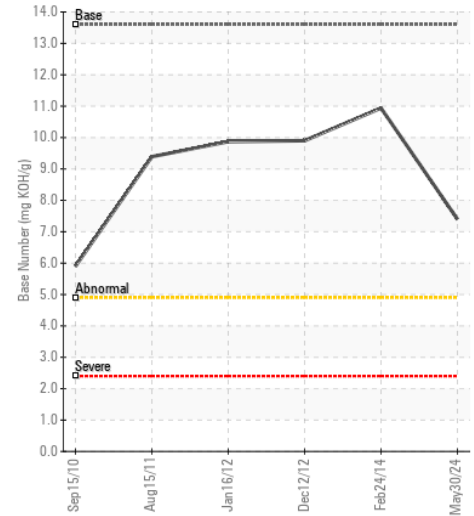

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0213084

Lab Number : 06196384

Unique Number : 11058507

Test Package : CONST (Additional Tests: TBN)

Received : 31 May 2024

Tested : 03 Jun 2024

Diagnosed : 03 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO

411 SOUTH REGIONAL ROAD

GREENSBORO, NC

US 27409

Contact: NICK GALLAHER

NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556