



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 350P 1FF350PACPF000755**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (32 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0217896</b>	JR0203304	---
Sample Date		Client Info		<b>29 May 2024</b>	20 Feb 2024	---
Machine Age	hrs	Client Info		<b>997</b>	486	---
Oil Age	hrs	Client Info		<b>511</b>	0	---
Filter Age	hrs	Client Info		<b>511</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

### WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	<b>43</b>	34	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	9	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	1	---
Aluminum	ppm	ASTM D5185m	>31	<b>6</b>	4	---
Lead	ppm	ASTM D5185m	>26	<b>1</b>	3	---
Copper	ppm	ASTM D5185m	>26	<b>33</b>	65	---
Tin	ppm	ASTM D5185m	>4	<b>1</b>	3	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>9</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	0.2	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	7.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.9</b>	22.9	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>3</b>	13	---
Boron	ppm	ASTM D5185m		<b>170</b>	224	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>245</b>	228	---
Manganese	ppm	ASTM D5185m		<b>1</b>	1	---
Magnesium	ppm	ASTM D5185m		<b>850</b>	732	---
Calcium	ppm	ASTM D5185m		<b>1431</b>	1361	---
Phosphorus	ppm	ASTM D5185m		<b>857</b>	812	---
Zinc	ppm	ASTM D5185m		<b>1060</b>	985	---
Sulfur	ppm	ASTM D5185m		<b>3113</b>	2653	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.4</b>	18.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>10.0</b>	6.9	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	▲ 11.0	---

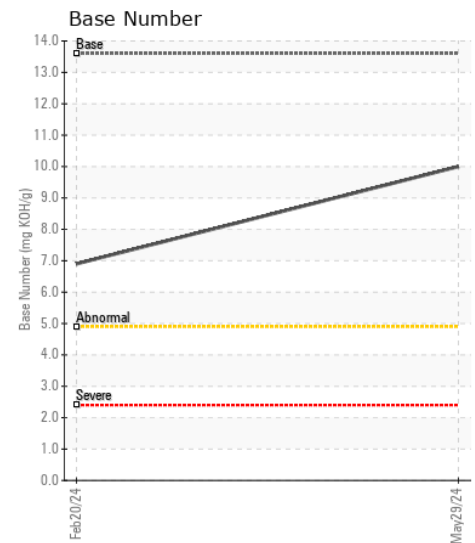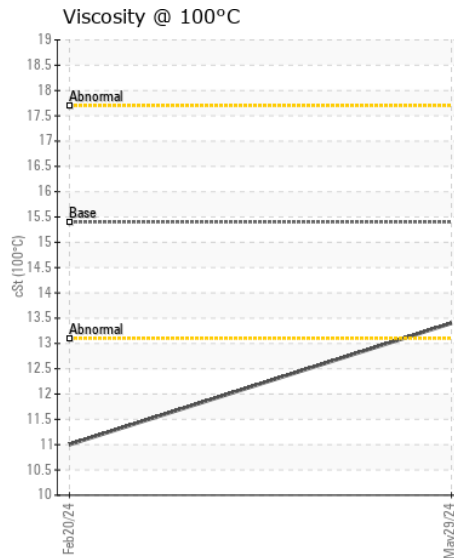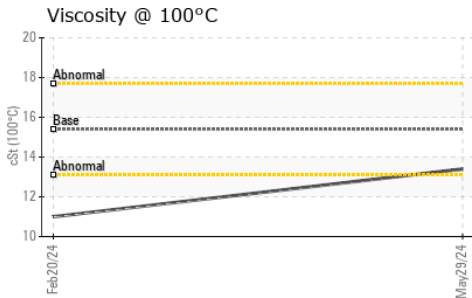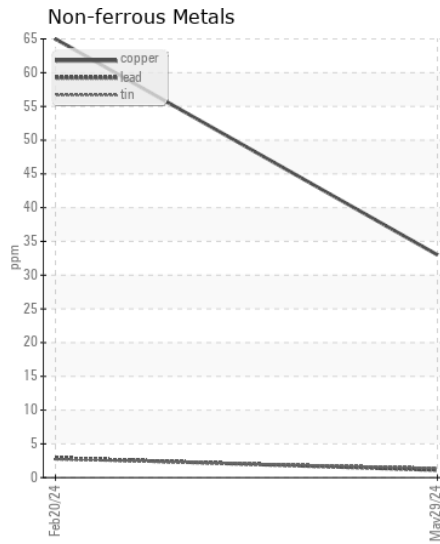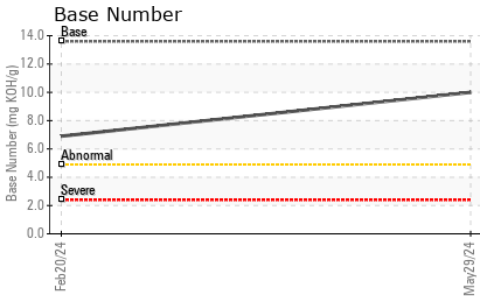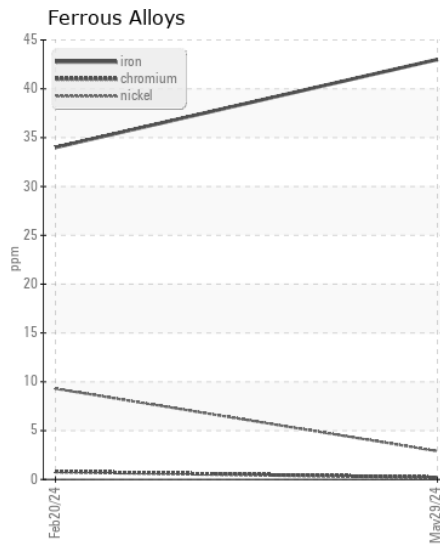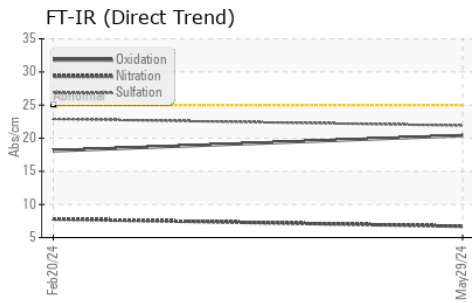

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0217896

**Lab Number** : 06196395

**Unique Number** : 11058518

**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 31 May 2024

**Tested** : 03 Jun 2024

**Diagnosed** : 03 Jun 2024 - Wes Davis

**B & S SITE DEVELOPMENT**

7800 PINEY BRANCH LANE

BRISTOW, VA

US 20136

Contact: DANNY HUFF

dhuff@bandssite.com

T: (540)270-3203

F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)