



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 9 - Marietta
Machine Id
JOHN DEERE 700K 1T0700KXJDE248315
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048954	LEC0042977	---
Sample Date		Client Info		22 May 2024	22 Sep 2023	---
Machine Age	hrs	Client Info		6097	5603	---
Oil Age	hrs	Client Info		500	500	---
Filter Age	hrs	Client Info		500	500	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	13	30	---
Chromium	ppm	ASTM D5185m	>11	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	3	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	2	4	---
Lead	ppm	ASTM D5185m	>26	0	<1	---
Copper	ppm	ASTM D5185m	>26	1	10	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>120	5	6	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	7.0	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	23.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	3	---
Boron	ppm	ASTM D5185m	250	116	325	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	70	122	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	836	655	---
Calcium	ppm	ASTM D5185m	3000	1172	1512	---
Phosphorus	ppm	ASTM D5185m	1150	1092	658	---
Zinc	ppm	ASTM D5185m	1350	1240	853	---
Sulfur	ppm	ASTM D5185m	4250	3534	2423	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	19.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.6	7.1	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	13.4	---


FT-IR (Direct Trend)

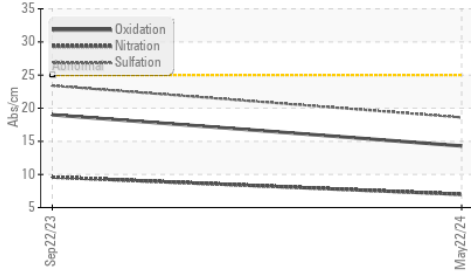


Ferrous Alloys

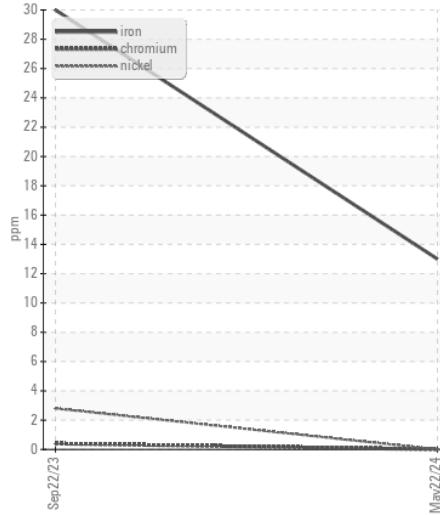


Base Number

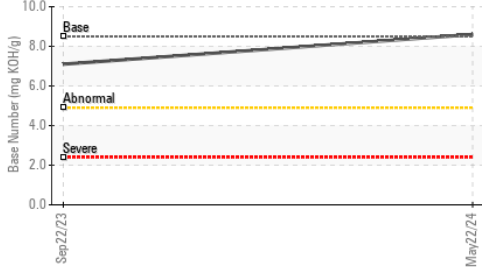


Non-ferrous Metals

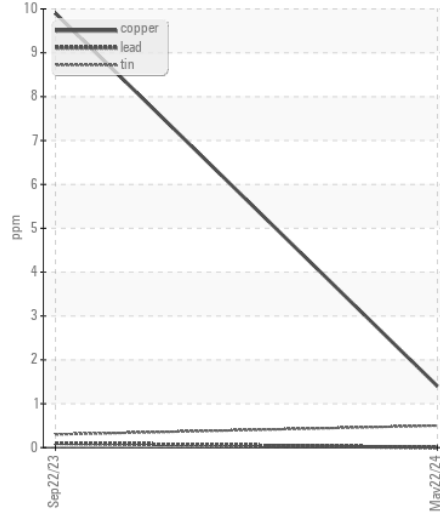


Viscosity @ 100°C

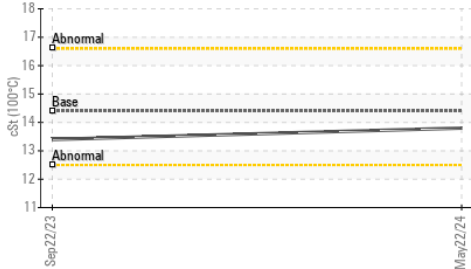

Viscosity @ 100°C

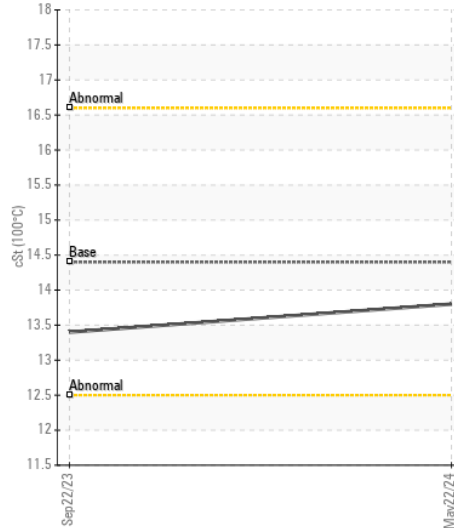

Base Number

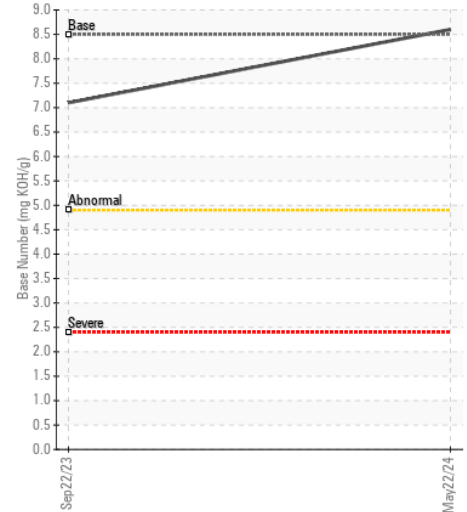

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LEC0048954 Received : 31 May 2024
 Lab Number : 06196406 Tested : 02 Jun 2024
 Unique Number : 11058529 Diagnosed : 02 Jun 2024 - Wes Davis
 Test Package : CONST (Additional Tests: TBN)

LANE PIPELINE
 2946 E MAIN ST
 BRIDGEPORT, WV
 US 26330
 Contact: JESSE WILBURN
 jessewilburn@gmail.com
 T: (740)440-0927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)