



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>MARGINAL</b>

Machine Id  
**31703**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0904474</b>	WC0861123	WC0815371
Sample Date		Client Info		<b>10 May 2024</b>	24 Nov 2023	18 Aug 2023
Machine Age	mls	Client Info		<b>25342</b>	13877	7227
Oil Age	mls	Client Info		<b>0</b>	10000	7227
Filter Age	mls	Client Info		<b>0</b>	10000	7227
Oil Changed		Client Info		<b>N/A</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	Changed	Changed
Sample Status				<b>MARGINAL</b>	NORMAL	ATTENTION

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>37</b>	24	47
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	3	5
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	3	20
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>8</b>	8	27
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	4	6
Fuel	%	ASTM D3524	>5	<b>&lt;1.0</b>	<1.0	1.7
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.3</b>	9.4	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.6</b>	20.4	22.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	5
Boron	ppm	ASTM D5185m	250	<b>146</b>	2	26
Barium	ppm	ASTM D5185m	10	<b>0</b>	6	4
Molybdenum	ppm	ASTM D5185m	100	<b>77</b>	64	50
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	5
Magnesium	ppm	ASTM D5185m	450	<b>520</b>	936	755
Calcium	ppm	ASTM D5185m	3000	<b>1268</b>	1107	1185
Phosphorus	ppm	ASTM D5185m	1150	<b>1029</b>	1036	661
Zinc	ppm	ASTM D5185m	1350	<b>1224</b>	1218	904
Sulfur	ppm	ASTM D5185m	4250	<b>3372</b>	3347	2684
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.0</b>	17.9	21.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.2</b>	8.2	6.8
Visc @ 100°C	cSt	ASTM D445	14.4	<b>▲ 12.2</b>	12.7	● 11.8


▲ Viscosity @ 100°C

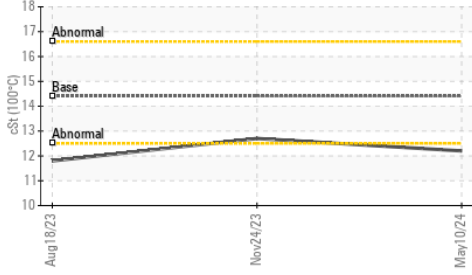


Ferrous Alloys

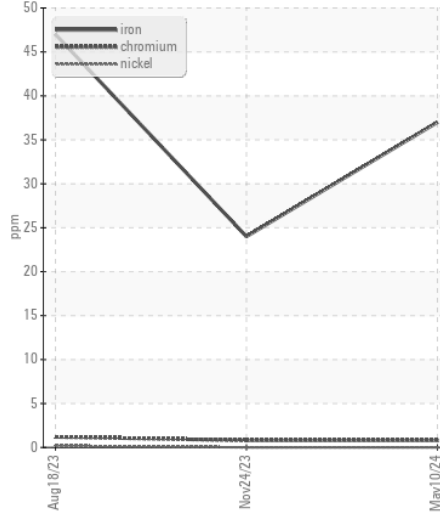


FT-IR (Direct Trend)

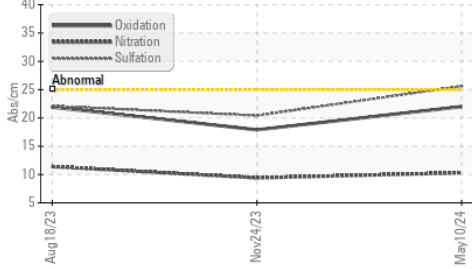


Non-ferrous Metals

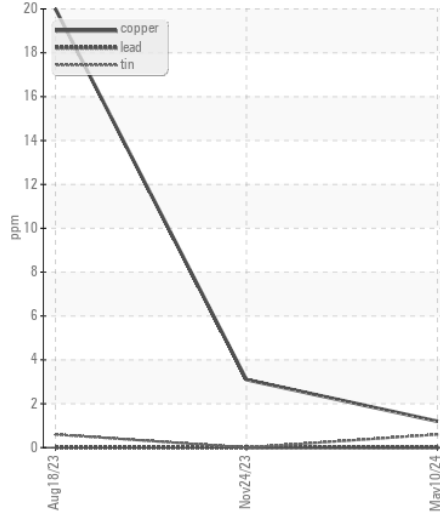


Base Number

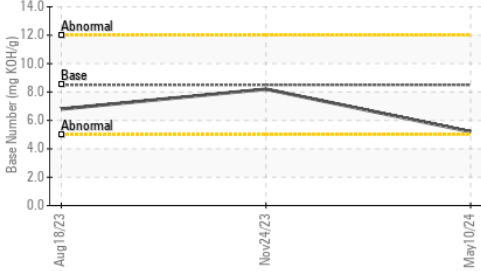


Fuel Dilution

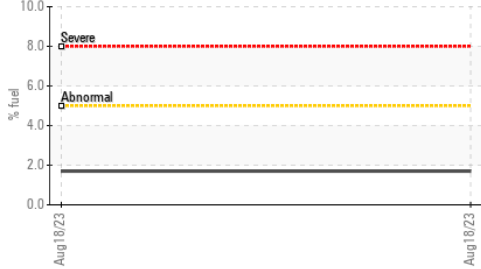

▲ Viscosity @ 100°C

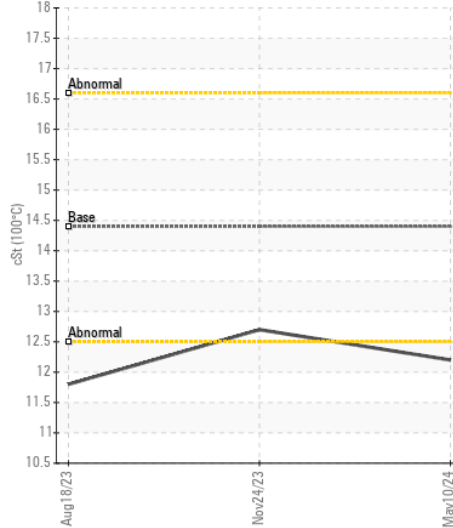

Base Number

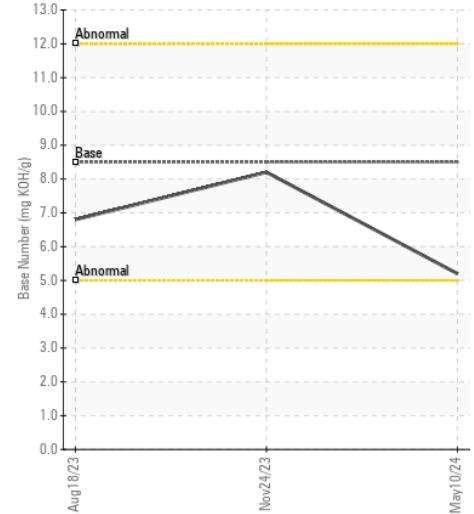

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0904474 **Received** : 31 May 2024  
**Lab Number** : 06196510 **Tested** : 04 Jun 2024  
**Unique Number** : 11058633 **Diagnosed** : 04 Jun 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105  
 Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com  
 T: (336)767-9642  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)