



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

Contracting

Machine Id

7305 7305

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0947816	WC0861553	WC0852436
Sample Date		Client Info		29 May 2024	28 Nov 2023	24 Aug 2023
Machine Age	hrs	Client Info		12022	11736	11408
Oil Age	hrs	Client Info		286	328	359
Filter Age	hrs	Client Info		286	328	359
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	11	11	6
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	<1	0
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	0	<1	0
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION














There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	5	6	5
Potassium	ppm	ASTM D5185m	>20	0	0	0
Fuel	%	ASTM D3524	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	6.0	5.9	5.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	21.2	21.0
Particles >4µm		ASTM D7647	>20000	2332	7438	19044
Particles >6µm		ASTM D7647	>5000	1270	4052	▲ 10374
Particles >14µm		ASTM D7647	>640	216	● 690	▲ 1766
Particles >21µm		ASTM D7647	>160	73	● 232	▲ 595
Particles >38µm		ASTM D7647	>40	11	36	▲ 92
Particles >71µm		ASTM D7647	>10	1	4	9
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/17/15	● 20/19/17	▲ 21/21/18
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	3	2
Boron	ppm	ASTM D5185m	250	57	60	74
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	50	43	44
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	590	491	484
Calcium	ppm	ASTM D5185m	3000	1585	1727	1640
Phosphorus	ppm	ASTM D5185m	1150	826	772	748
Zinc	ppm	ASTM D5185m	1350	960	879	886
Sulfur	ppm	ASTM D5185m	4250	2910	2319	2926
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.0	19.1	18.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.7	10.3	10.3
Visc @ 100°C	cSt	ASTM D445	14.4	11.2	11.1	11.3

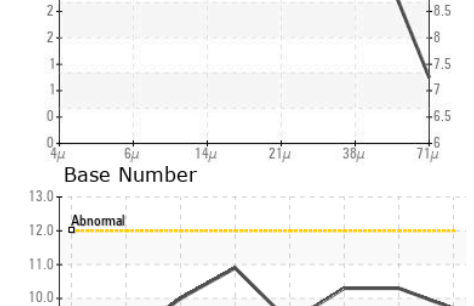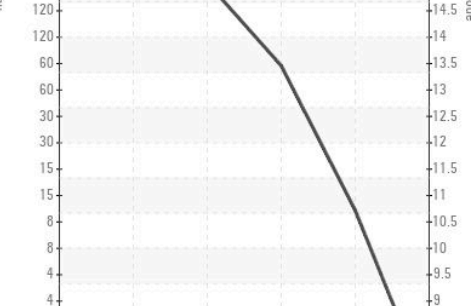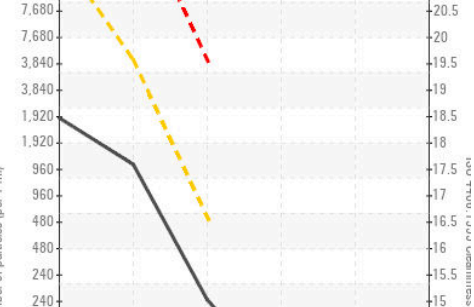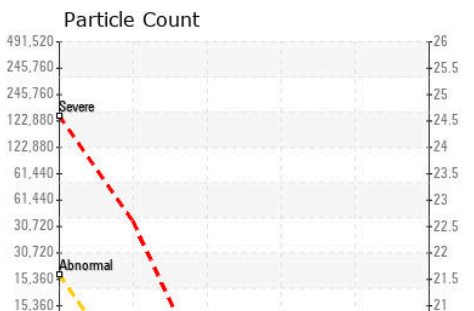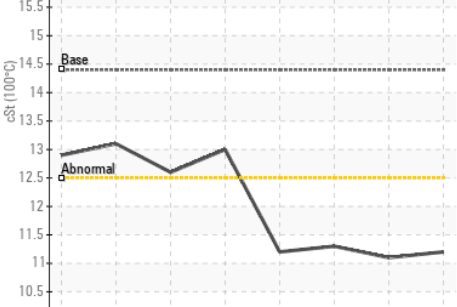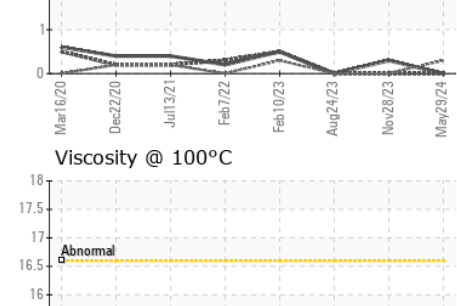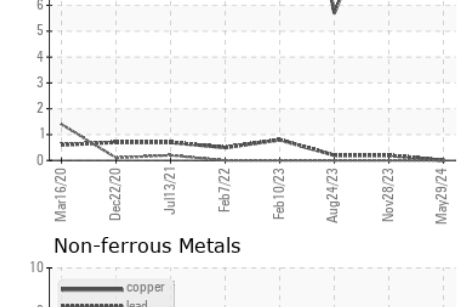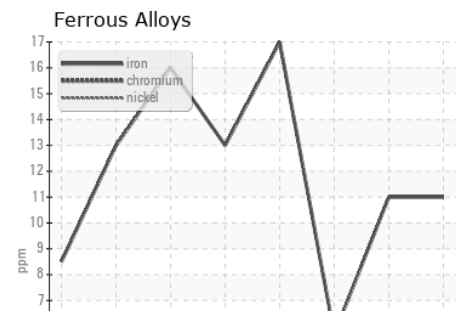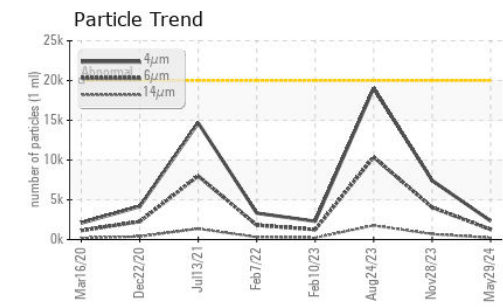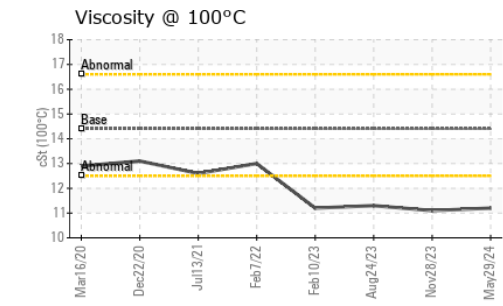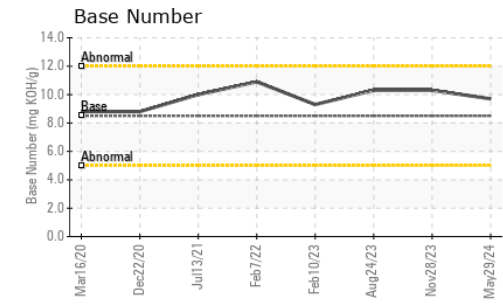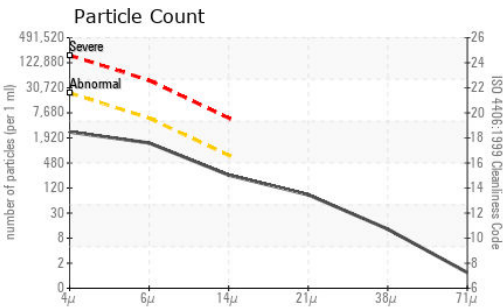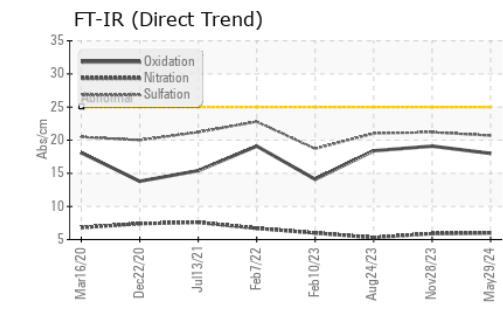

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0947816 **Received** : 31 May 2024
Lab Number : 06196535 **Tested** : 03 Jun 2024
Unique Number : 11058658 **Diagnosed** : 03 Jun 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PrtCount, TBN)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)