



WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL



Area
[46983]
 Machine Id
JOHN DEERE 755K 1T0755KXPHE309986
 Component
Hydraulic System
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217626	---	---
Sample Date		Client Info		29 May 2024	---	---
Machine Age	hrs	Client Info		9496	---	---
Oil Age	hrs	Client Info		9496	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	18	---	---
Iron	ppm	ASTM D5185m	>71	2	---	---
Chromium	ppm	ASTM D5185m	>11	0	---	---
Nickel	ppm	ASTM D5185m	>6	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>11	<1	---	---
Lead	ppm	ASTM D5185m	>13	<1	---	---
Copper	ppm	ASTM D5185m	>21	<1	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>24	8	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	86157	---	---
Particles >6µm		ASTM D7647	>5000	1867	---	---
Particles >14µm		ASTM D7647	>640	75	---	---
Particles >21µm		ASTM D7647	>160	12	---	---
Particles >38µm		ASTM D7647	>40	1	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/19/16	24/18/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	2	---	---
Boron	ppm	ASTM D5185m		76	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		28	---	---
Calcium	ppm	ASTM D5185m		2474	---	---
Phosphorus	ppm	ASTM D5185m		982	---	---
Zinc	ppm	ASTM D5185m		1195	---	---
Sulfur	ppm	ASTM D5185m		6022	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.69	---	---
Visc @ 40°C	cSt	ASTM D445		54.3	---	---

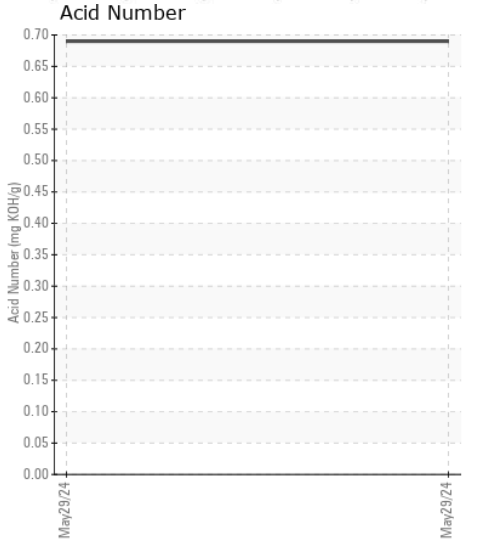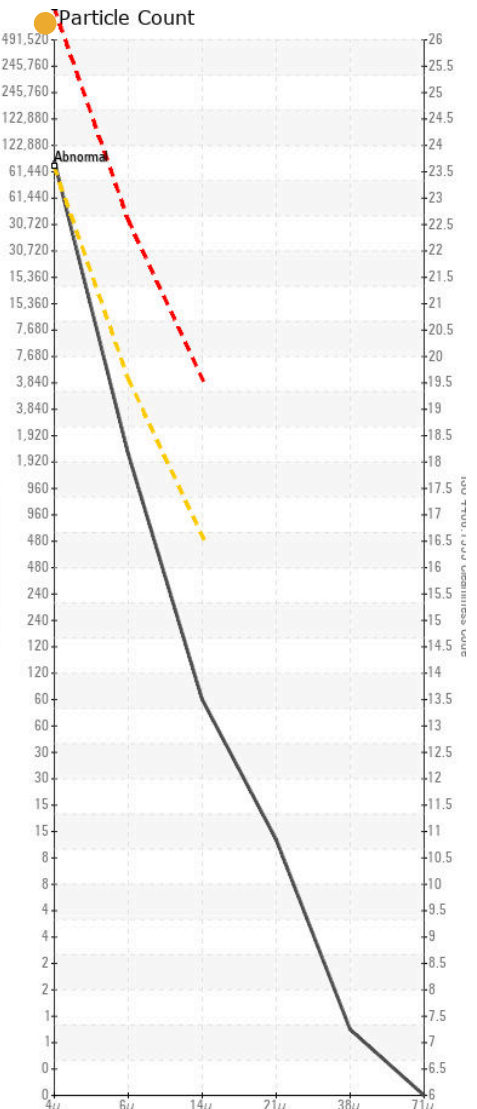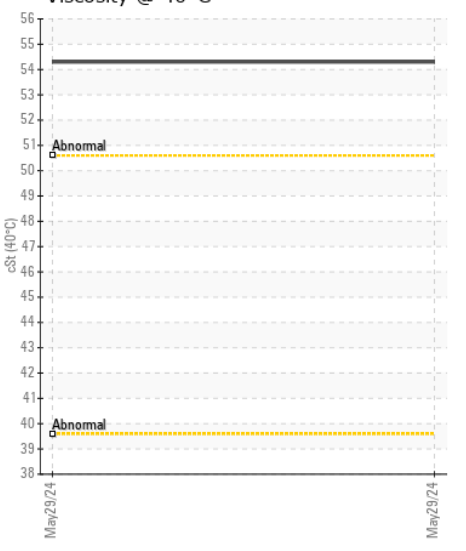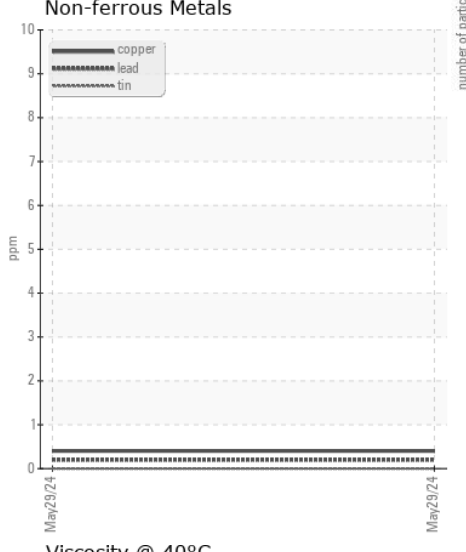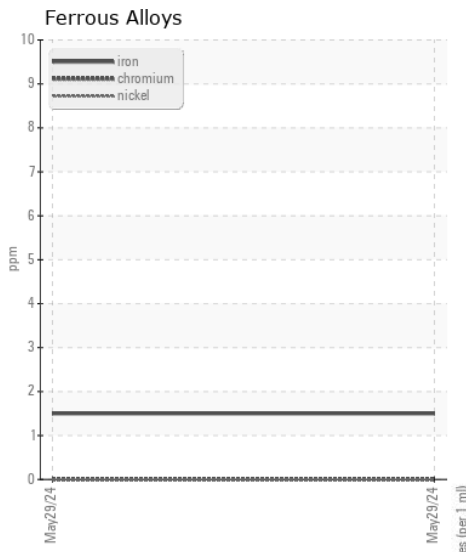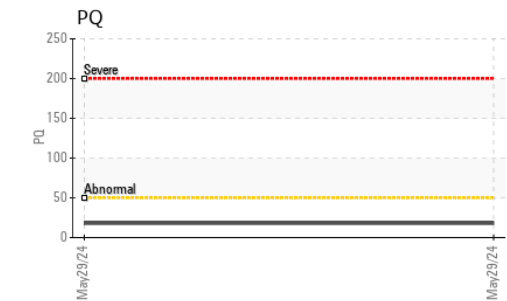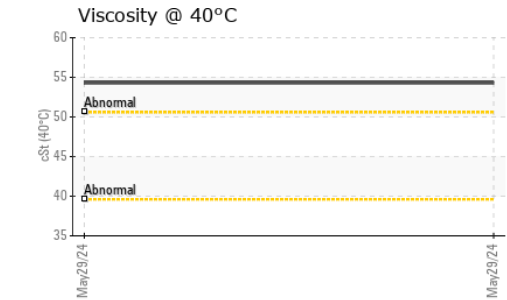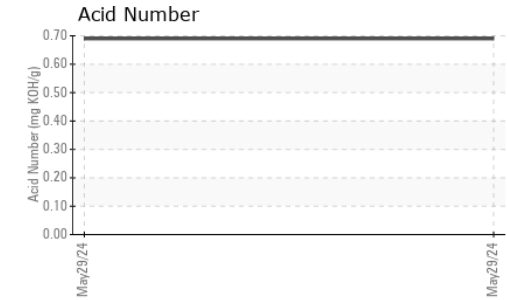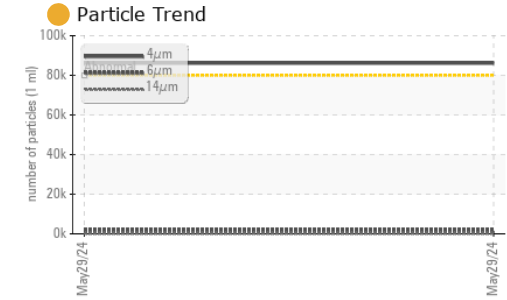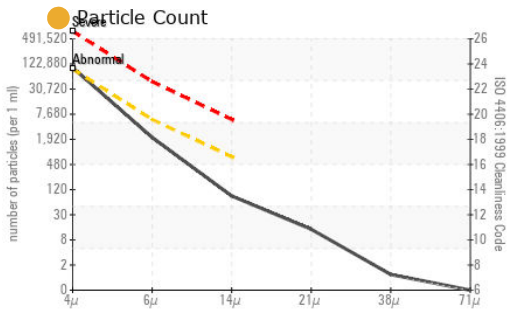

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217626 **Received** : 31 May 2024
Lab Number : 06196599 **Tested** : 03 Jun 2024
Unique Number : 11058722 **Diagnosed** : 03 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715