



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[POST FILTER]
 Machine Id
T2-LFG (S/N 10241H19727554Z)

Component
Screw Compressor
 Fluid
ISEL ESTER GAS COMPRESSOR 6029-68 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003440	TO10003441	---
Sample Date		Client Info		31 May 2024	30 May 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>60	0	<1	---
Chromium	ppm	ASTM D5185m	>4	<1	<1	---
Nickel	ppm	ASTM D5185m		0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>5	2	2	---
Lead	ppm	ASTM D5185m	>10	<1	<1	---
Copper	ppm	ASTM D5185m	>30	<1	<1	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>50	19	15	---
Potassium	ppm	ASTM D5185m	>20	<1	1	---
Water	%	ASTM D6304	>0.1	0.012	0.012	---
ppm Water	ppm	ASTM D6304	>1000	127	128	---
Particles >4µm		ASTM D7647	>10000	3603	15765	---
Particles >6µm		ASTM D7647	>2500	767	4194	---
Particles >14µm		ASTM D7647	>320	30	117	---
Particles >21µm		ASTM D7647	>80	8	17	---
Particles >38µm		ASTM D7647	>20	0	0	---
Particles >71µm		ASTM D7647	>4	0	0	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/12	21/19/14	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		<1	<1	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		<1	<1	---
Calcium	ppm	ASTM D5185m		0	0	---
Phosphorus	ppm	ASTM D5185m		422	416	---
Zinc	ppm	ASTM D5185m		0	0	---
Sulfur	ppm	ASTM D5185m		262	241	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.80	0.74	---
Visc @ 40°C	cSt	ASTM D445		65.1	65.9	---
Visc @ 100°C	cSt	ASTM D445		8.4	8.4	---
Viscosity Index (VI)	Scale	ASTM D2270		97	96	---

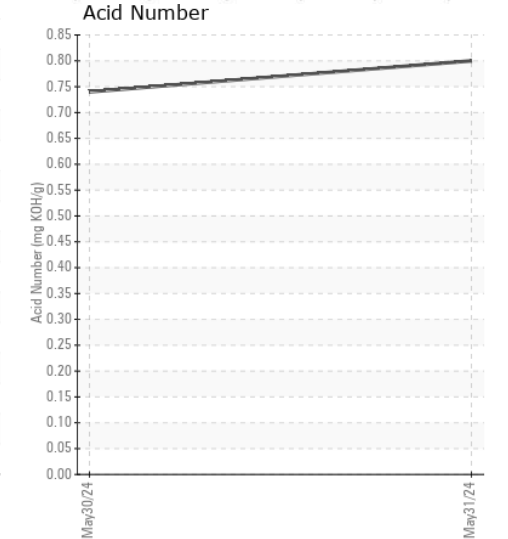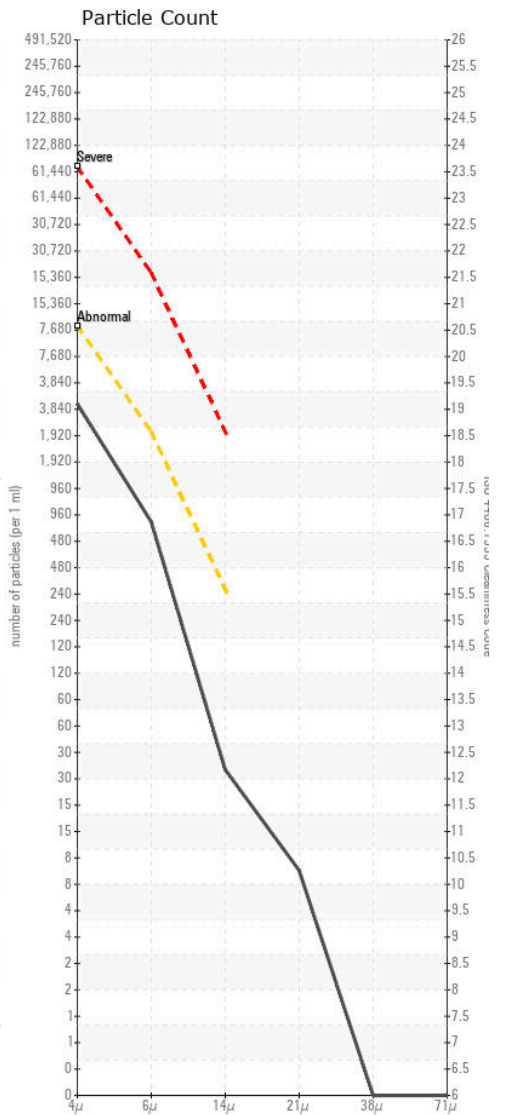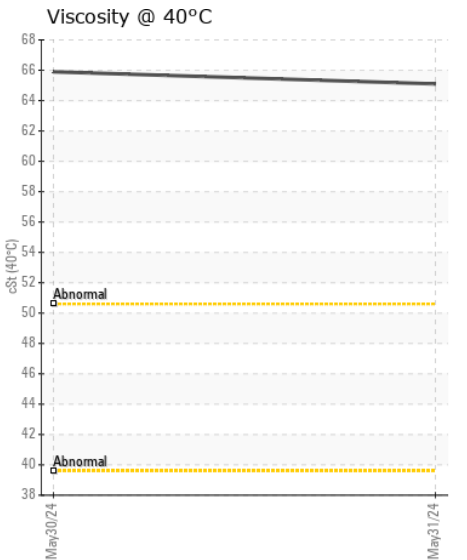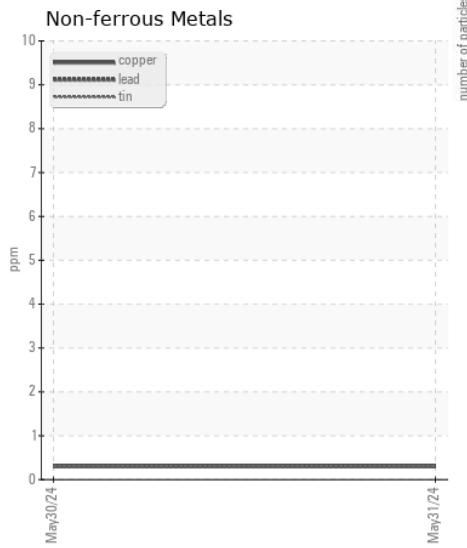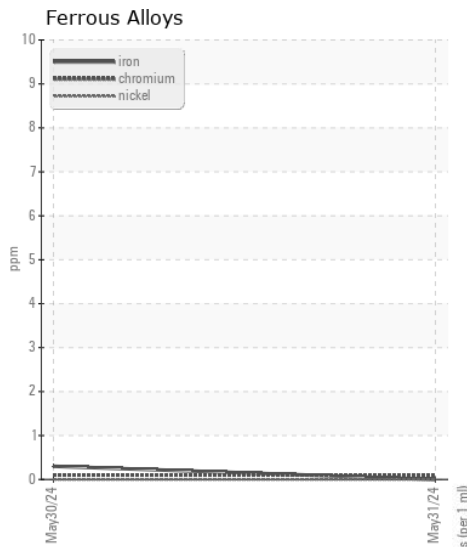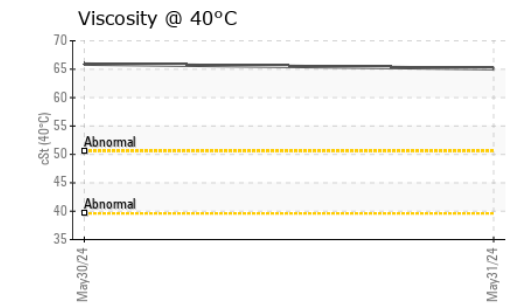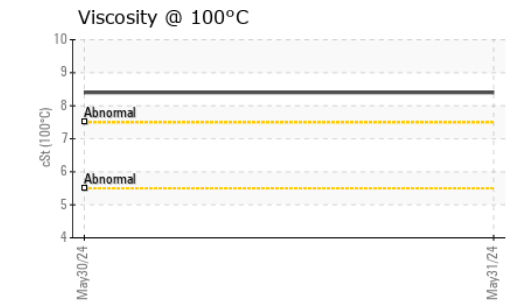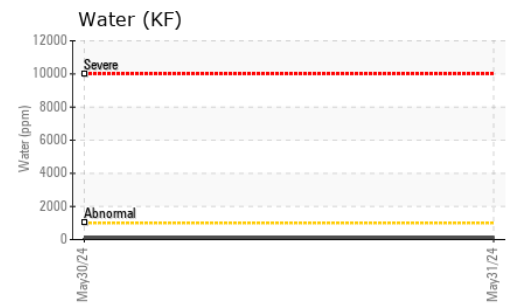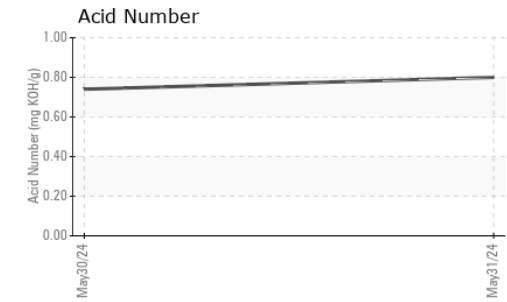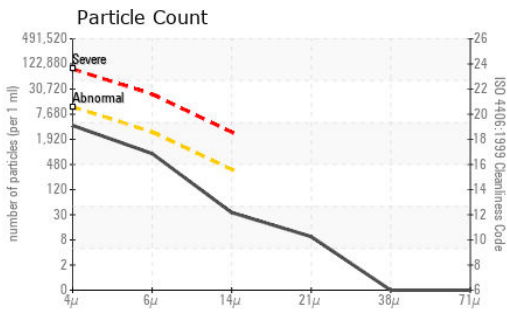

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003440 **Received** : 31 May 2024
Lab Number : 06196754 **Tested** : 03 Jun 2024
Unique Number : 11058877 **Diagnosed** : 03 Jun 2024 - Doug Bogart
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

NEXT ERA - MCCOMMAS BLUFF

DALLAS, TX
US

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: