



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
ALICE I HOOKER
Machine Id
[ALICE I HOOKER] 005 589809-5
Component
Center Reduction Gear
Fluid
CHEVRON MEROPA 320 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW06196849 | MW0068468 | MW06126623 |
| Sample Date | | Client Info | | 06 May 2024 | 01 Apr 2024 | 01 Mar 2024 |
| Machine Age | hrs | Client Info | | 67788 | 67155 | 4811 |
| Oil Age | hrs | Client Info | | 0 | 67155 | 0 |
| Filter Age | hrs | Client Info | | 0 | 67155 | 0 |
| Oil Changed | | Client Info | | N/A | Changed | N/A |
| Filter Changed | | Client Info | | N/A | Changed | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >150 | 88 | 79 | 74 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | 2 | 2 |
| Lead | ppm | ASTM D5185m | >100 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >50 | 11 | 9 | 10 |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >50 | 4 | 3 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | <1 | 1 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | LIGHT |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 13 | 12 | 14 |
| Boron | ppm | ASTM D5185m | 20 | 5 | 6 | 6 |
| Barium | ppm | ASTM D5185m | | 2 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 2 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | 1 | 1 |
| Magnesium | ppm | ASTM D5185m | | 2 | 1 | 2 |
| Calcium | ppm | ASTM D5185m | 25 | 22 | 19 | 29 |
| Phosphorus | ppm | ASTM D5185m | 235 | 317 | 280 | 282 |
| Zinc | ppm | ASTM D5185m | | 17 | 7 | 7 |
| Sulfur | ppm | ASTM D5185m | | 6070 | 6762 | 6476 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.56 | 0.45 | 0.54 | 0.55 |
| Visc @ 40°C | cSt | ASTM D445 | 304 | 323 | 321 | 323 |

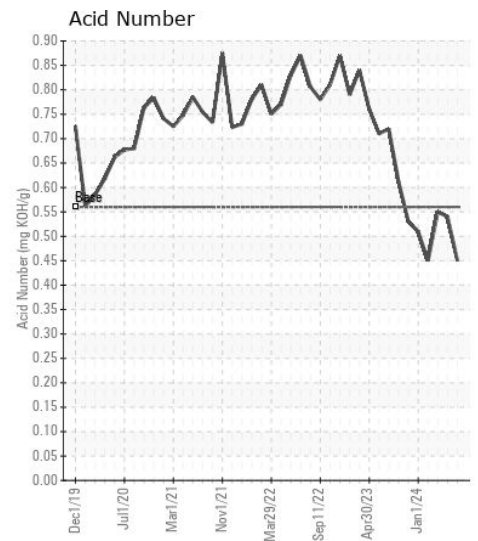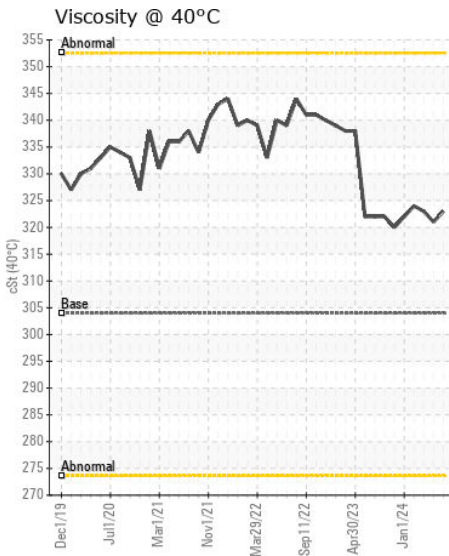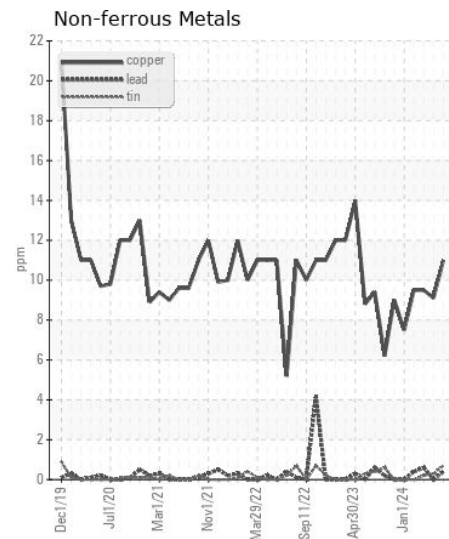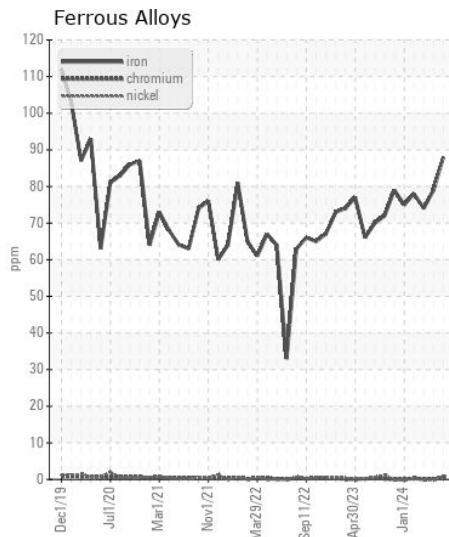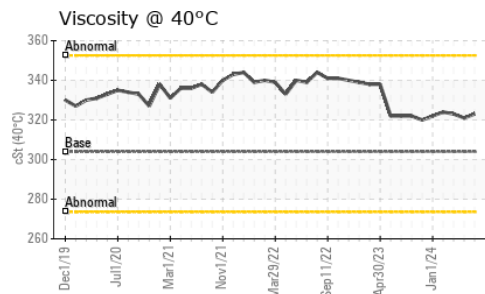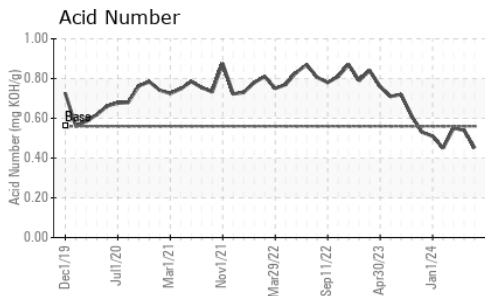

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW06196849

Lab Number : 06196849

Unique Number : 11058972

Test Package : MAR 2

Received : 31 May 2024

Tested : 03 Jun 2024

Diagnosed : 03 Jun 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)