



WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[47004]

Machine Id

HAMM H12I H2840096

Component

Left Vibratory Drum Gearbox

Fluid

JOHN DEERE GL-5 80W90 (--- QTS)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217623	---	---
Sample Date		Client Info		30 May 2024	---	---
Machine Age	hrs	Client Info		1629	---	---
Oil Age	hrs	Client Info		1629	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---

WEAR

Gear wear is indicated. Bearing and/or bushing wear is indicated.

PQ		ASTM D8184		186	---	---
Iron	ppm	ASTM D5185m	>200	▲ 508	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		3	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m		5	---	---
Lead	ppm	ASTM D5185m		5	---	---
Copper	ppm	ASTM D5185m		▲ 190	---	---
Tin	ppm	ASTM D5185m		2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		33	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		47	---	---
Barium	ppm	ASTM D5185m		6	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		4	---	---
Calcium	ppm	ASTM D5185m		24	---	---
Phosphorus	ppm	ASTM D5185m		1221	---	---
Zinc	ppm	ASTM D5185m		251	---	---
Sulfur	ppm	ASTM D5185m		27533	---	---
Visc @ 40°C	cSt	ASTM D445		110	---	---

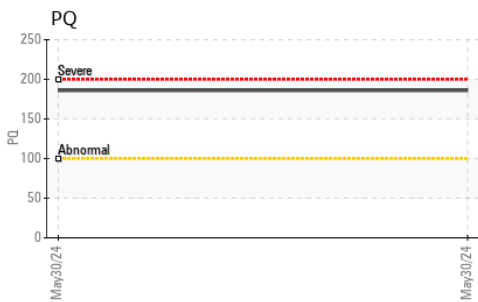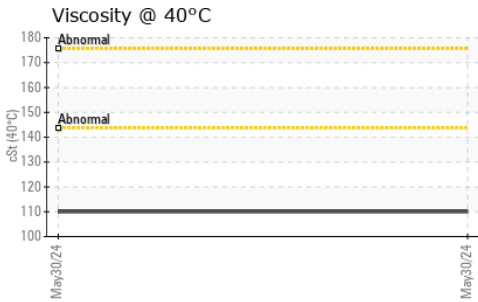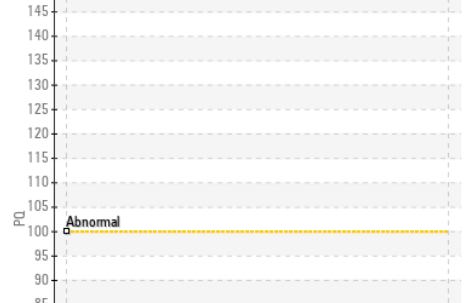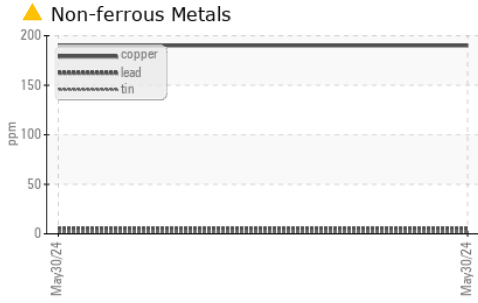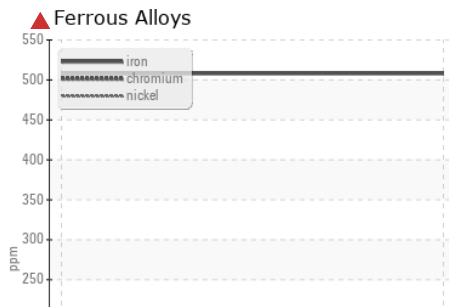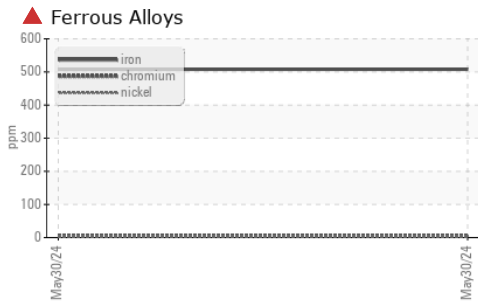

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217623 **Received** : 31 May 2024
Lab Number : 06196921 **Tested** : 03 Jun 2024
Unique Number : 11059044 **Diagnosed** : 03 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVLOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)