



Area  
**[05W46759]**  
Machine Id  
**JOHN DEERE 210G 1FF210GXJNF530402**  
Component  
**Right Final Drive**  
Fluid  
**JOHN DEERE GL-5 80W90 (8 QTS)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>JR0214474</b>   | JR0208585   | JR0189919   |
| Sample Date    |     | Client Info |           | <b>29 May 2024</b> | 28 Feb 2024 | 16 Oct 2023 |
| Machine Age    | hrs | Client Info |           | <b>2035</b>        | 1478        | 962         |
| Oil Age        | hrs | Client Info |           | <b>2035</b>        | 1478        | 962         |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Not Changd  | Not Changd  |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Sample Status  |     |             |           | <b>ABNORMAL</b>    | ABNORMAL    | NORMAL      |

### WEAR

All component wear rates are normal.

|              |        |             |       |              |      |      |
|--------------|--------|-------------|-------|--------------|------|------|
| PQ           |        | ASTM D8184  | >1250 | <b>300</b>   | 239  | 145  |
| Iron         | ppm    | ASTM D5185m | >750  | <b>491</b>   | 276  | 181  |
| Chromium     | ppm    | ASTM D5185m | >9    | <b>6</b>     | 4    | 3    |
| Nickel       | ppm    | ASTM D5185m | >10   | <b>1</b>     | <1   | <1   |
| Titanium     | ppm    | ASTM D5185m |       | <b>3</b>     | 2    | <1   |
| Silver       | ppm    | ASTM D5185m |       | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >40   | <b>40</b>    | 25   | 1    |
| Lead         | ppm    | ASTM D5185m | >15   | <b>0</b>     | 0    | <1   |
| Copper       | ppm    | ASTM D5185m | >40   | <b>&lt;1</b> | 1    | 2    |
| Tin          | ppm    | ASTM D5185m | >10   | <b>&lt;1</b> | <1   | <1   |
| Vanadium     | ppm    | ASTM D5185m |       | <b>&lt;1</b> | 0    | <1   |
| White Metal  | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE | NONE |

### CONTAMINATION









Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

|                  |        |             |        |              |       |       |
|------------------|--------|-------------|--------|--------------|-------|-------|
| Silicon          | ppm    | ASTM D5185m | >75    | <b>133</b>   | 84    | 18    |
| Potassium        | ppm    | ASTM D5185m | >20    | <b>14</b>    | 8     | 4     |
| Water            |        | WC Method   | >0.075 | <b>NEG</b>   | NEG   | NEG   |
| Silt             | scalar | *Visual     | NONE   | <b>NONE</b>  | NONE  | NONE  |
| Debris           | scalar | *Visual     | NONE   | <b>NONE</b>  | NONE  | NONE  |
| Sand/Dirt        | scalar | *Visual     | NONE   | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar | *Visual     | NORML  | <b>NORML</b> | NORML | NORML |
| Odor             | scalar | *Visual     | NORML  | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar | *Visual     | >0.075 | <b>NEG</b>   | NEG   | NEG   |

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

|             |     |             |     |              |       |       |
|-------------|-----|-------------|-----|--------------|-------|-------|
| Sodium      | ppm | ASTM D5185m | >51 | <b>3</b>     | 2     | 2     |
| Boron       | ppm | ASTM D5185m |     | <b>73</b>    | 59    | 66    |
| Barium      | ppm | ASTM D5185m |     | <b>6</b>     | 5     | 6     |
| Molybdenum  | ppm | ASTM D5185m |     | <b>3</b>     | 0     | 0     |
| Manganese   | ppm | ASTM D5185m |     | <b>7</b>     | 5     | 5     |
| Magnesium   | ppm | ASTM D5185m |     | <b>8</b>     | 5     | 0     |
| Calcium     | ppm | ASTM D5185m |     | <b>27</b>    | 34    | 21    |
| Phosphorus  | ppm | ASTM D5185m |     | <b>561</b>   | 491   | 576   |
| Zinc        | ppm | ASTM D5185m |     | <b>17</b>    | 19    | 19    |
| Sulfur      | ppm | ASTM D5185m |     | <b>18436</b> | 15267 | 18029 |
| Visc @ 40°C | cSt | ASTM D445   |     | <b>187</b>   | 187   | 186   |

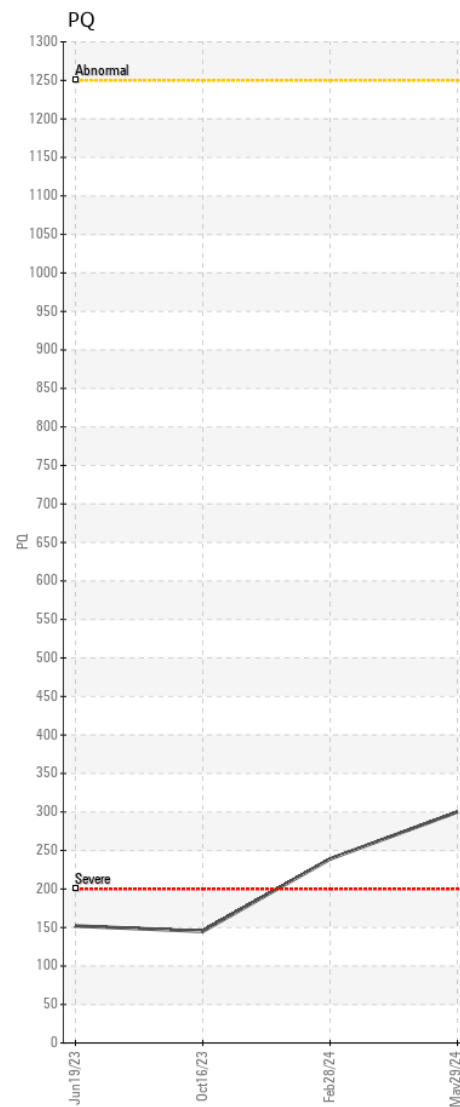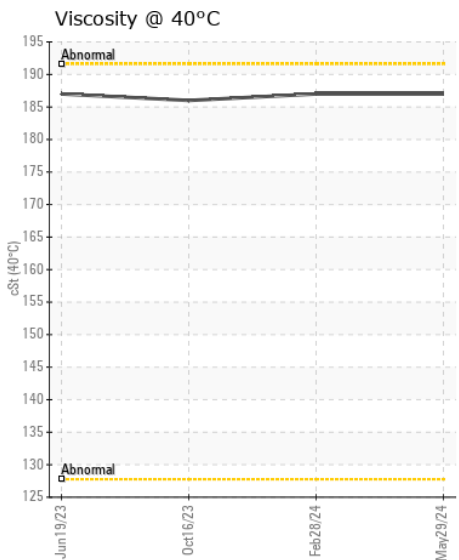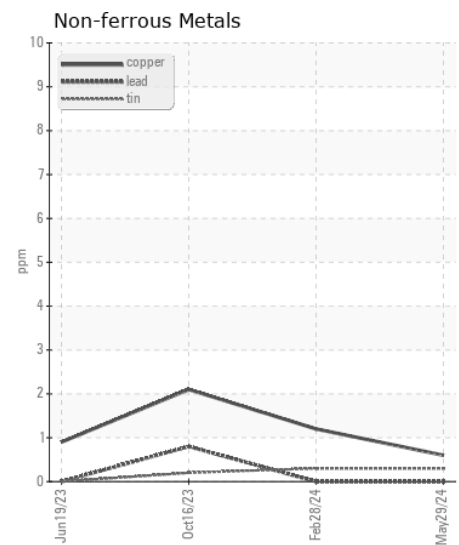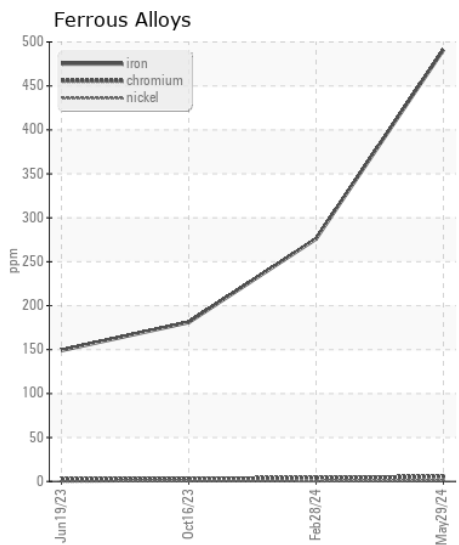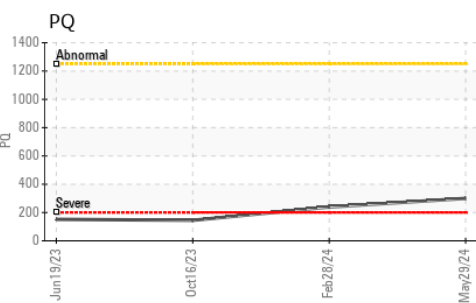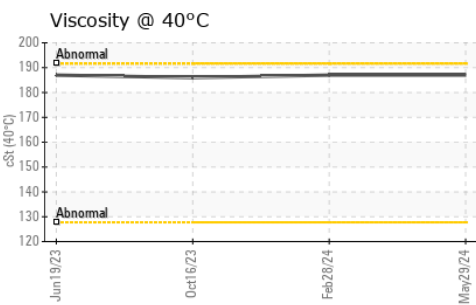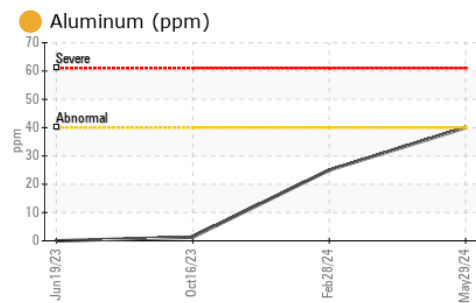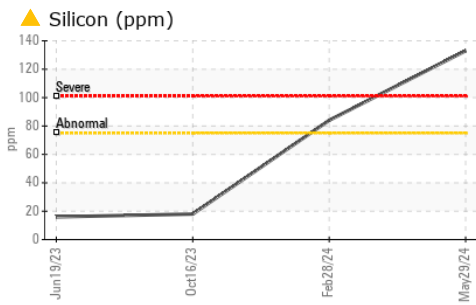

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0214474

Lab Number : 06196943

Unique Number : 11059066

Test Package : CONST ( Additional Tests: PQ )

Received : 31 May 2024

Tested : 03 Jun 2024

Diagnosed : 03 Jun 2024 - Sean Felton

JRE - MANASSAS PARK

9107 OWENS DRIVE

MANASSAS PARK, VA

US 20111

Contact: TECHNICIAN ACCOUNT

catherine.anastasio@wearcheck.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (703)631-4715