



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[47004]**

Machine Id

**HAMM H12I H2840096**

Component

**Right Vibratory Drum Gearbox**

Fluid

**JOHN DEERE GL-5 80W90 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0217618</b>	JR0149637	---
Sample Date		Client Info		<b>30 May 2024</b>	21 Mar 2023	---
Machine Age	hrs	Client Info		<b>1629</b>	945	---
Oil Age	hrs	Client Info		<b>684</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>31</b>	39	---
Iron	ppm	ASTM D5185m	>200	<b>147</b>	▲ 246	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>2</b>	5	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>6</b>	3	---
Lead	ppm	ASTM D5185m		<b>3</b>	6	---
Copper	ppm	ASTM D5185m		<b>100</b>	85	---
Tin	ppm	ASTM D5185m		<b>1</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m		<b>23</b>	17	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		<b>4</b>	11	---
Boron	ppm	ASTM D5185m		<b>71</b>	31	---
Barium	ppm	ASTM D5185m		<b>2</b>	8	---
Molybdenum	ppm	ASTM D5185m		<b>8</b>	1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m		<b>30</b>	9	---
Calcium	ppm	ASTM D5185m		<b>56</b>	34	---
Phosphorus	ppm	ASTM D5185m		<b>1239</b>	1082	---
Zinc	ppm	ASTM D5185m		<b>223</b>	325	---
Sulfur	ppm	ASTM D5185m		<b>30930</b>	27901	---
Visc @ 40°C	cSt	ASTM D445		<b>110</b>	103	---

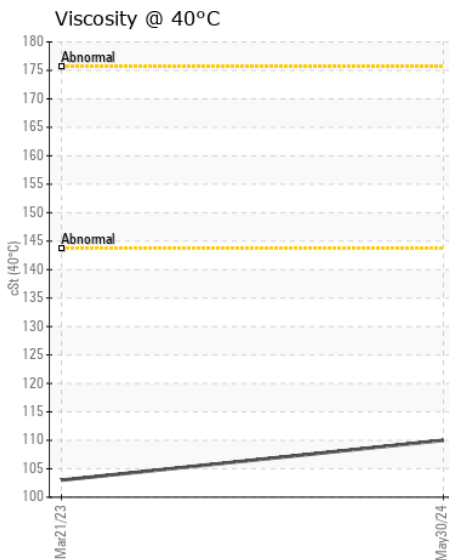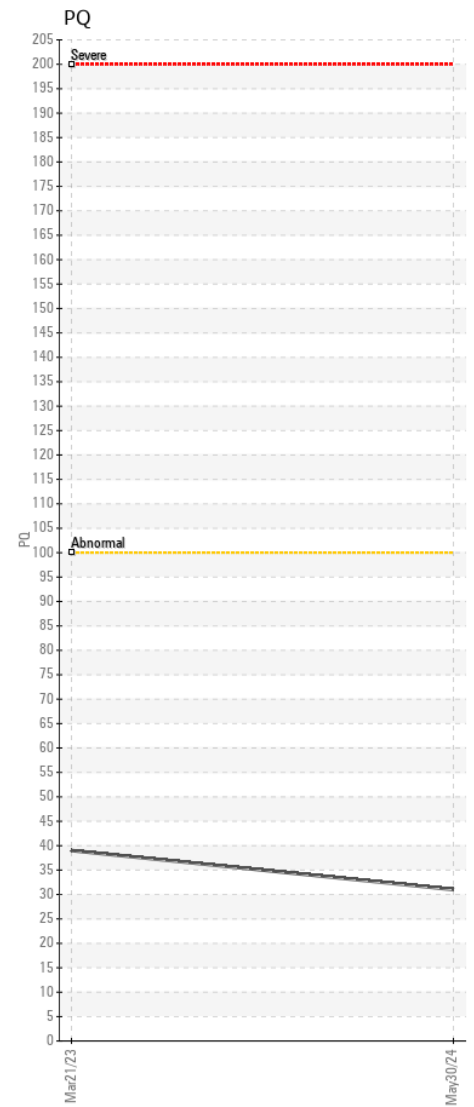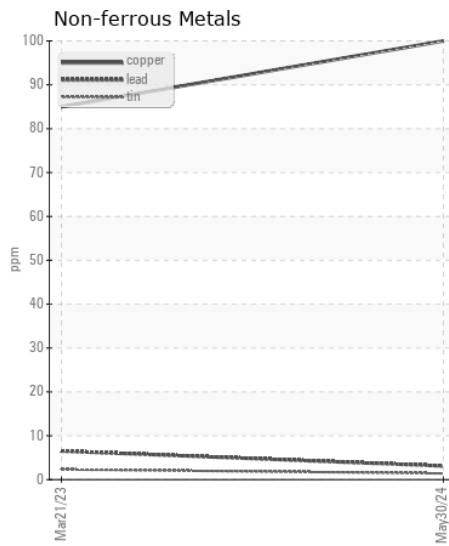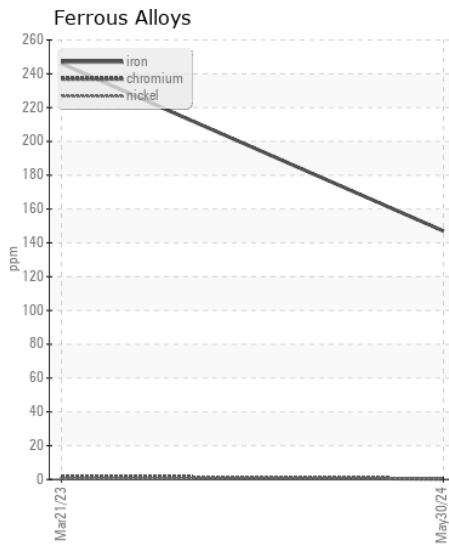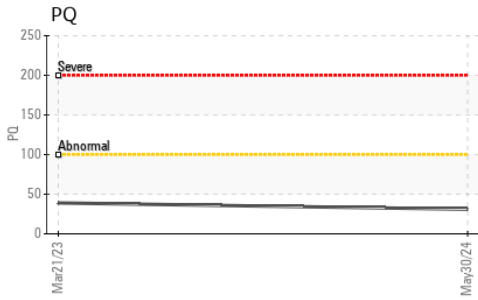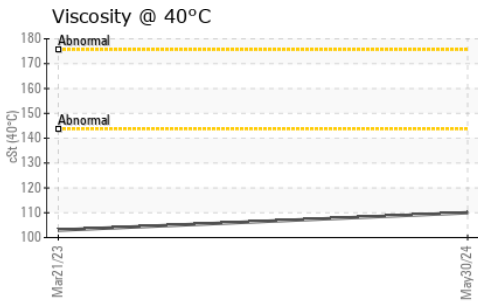

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0217618 **Received** : 31 May 2024  
**Lab Number** : 06196948 **Tested** : 03 Jun 2024  
**Unique Number** : 11059071 **Diagnosed** : 03 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**B & S SITE DEVELOPMENT**  
 7800 PINEY BRANCH LANE  
 BRISTOW, VA  
 US 20136  
 Contact: DANNY HUFF  
 dhuff@bandssite.com  
 T: (540)270-3203  
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)