



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624 P 1DW624PAHNLZ15950
 Component
Rear Differential
 Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204994	JR0204848	JR0187174
Sample Date		Client Info		30 May 2024	13 Mar 2024	16 Oct 2023
Machine Age	hrs	Client Info		3531	3047	2168
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Bearing and/or bushing wear is indicated.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		17	19	19
Iron	ppm	ASTM D5185m	>500	43	43	96
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	<1	2	1
Lead	ppm	ASTM D5185m	>25	22	55	110
Copper	ppm	ASTM D5185m	>100	▲ 116	68	137
Tin	ppm	ASTM D5185m	>10	1	<1	2
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	13	7
Potassium	ppm	ASTM D5185m	>20	0	2	3
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	7
Boron	ppm	ASTM D5185m	10	8	8	2
Barium	ppm	ASTM D5185m	10	0	0	1
Molybdenum	ppm	ASTM D5185m	10	8	14	0
Manganese	ppm	ASTM D5185m		1	<1	2
Magnesium	ppm	ASTM D5185m	100	107	118	84
Calcium	ppm	ASTM D5185m	3500	3185	3450	2984
Phosphorus	ppm	ASTM D5185m	1150	1132	1028	1058
Zinc	ppm	ASTM D5185m	1150	1207	1266	1203
Sulfur	ppm	ASTM D5185m	5000	4674	3947	3586
Visc @ 40°C	cSt	ASTM D445	48	52.9	58.0	53.2

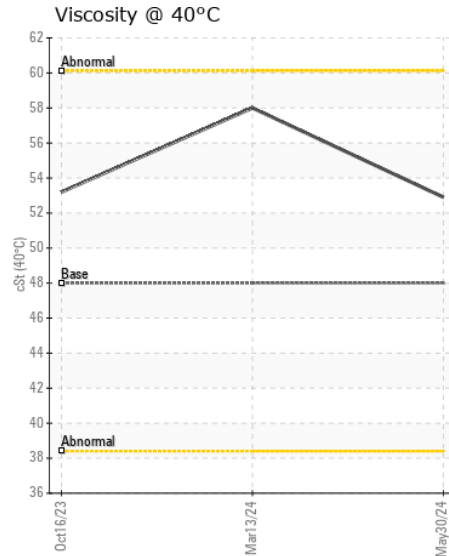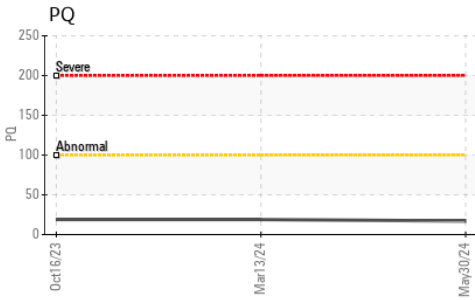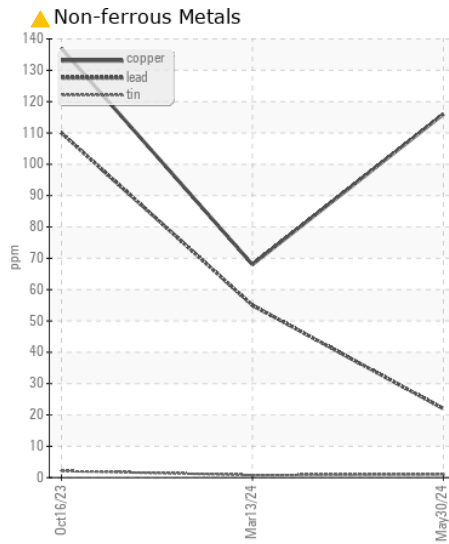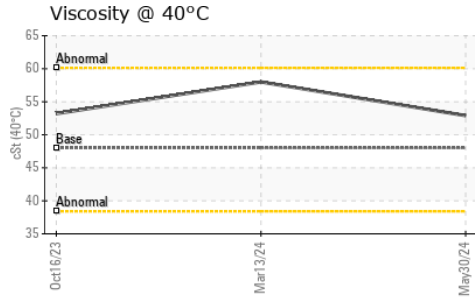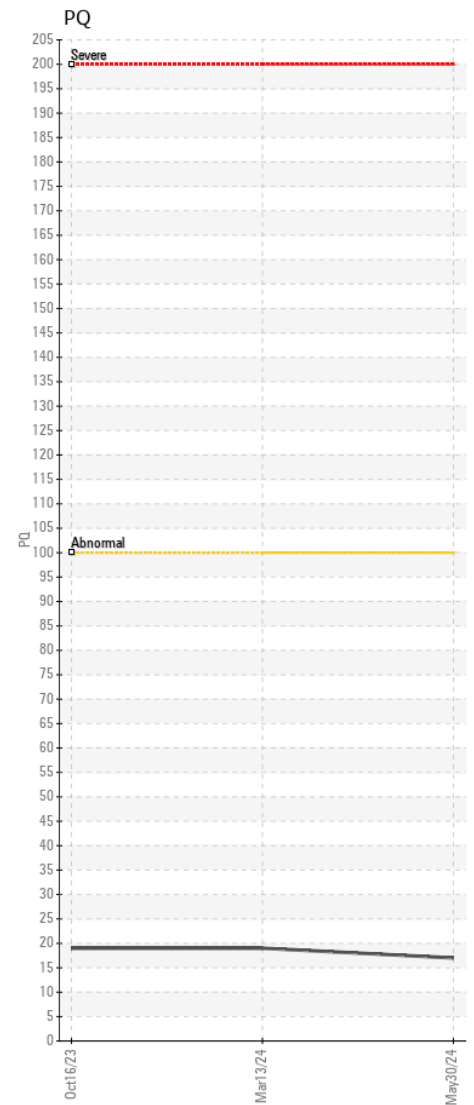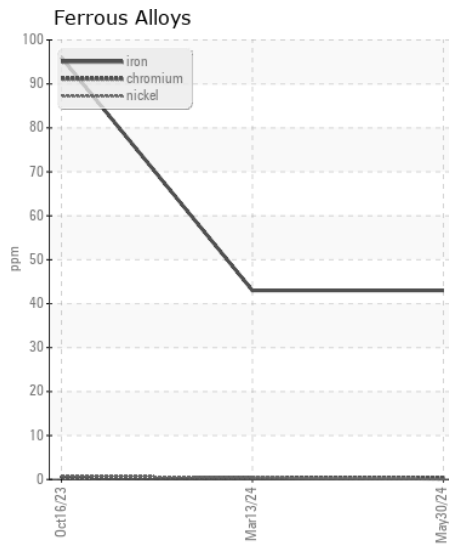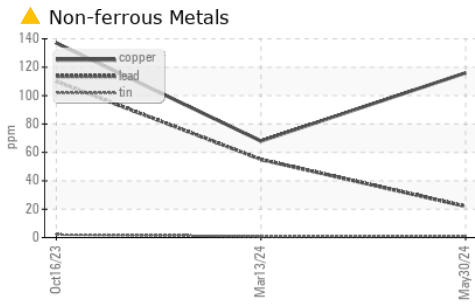

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0204994

Lab Number : 06196980

Unique Number : 11059103

Test Package : CONST (Additional Tests: PQ)

Received : 31 May 2024

Tested : 03 Jun 2024

Diagnosed : 04 Jun 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO

411 SOUTH REGIONAL ROAD

GREENSBORO, NC

US 27409

Contact: JUSTIN WILLIAMS

justin.williams@jamesriverequipment.com

T: (336)668-2762

F: (336)665-9556