



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 9 - Marietta
Machine Id
JOHN DEERE 210G 1FF210GXTNF530413
Component
Pump Drive
Fluid
GEAR OIL SAE 90 (1 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048943	LEC0042933	LEC0038884
Sample Date		Client Info		21 May 2024	15 Aug 2023	17 Mar 2023
Machine Age	hrs	Client Info		1964	1184	523
Oil Age	hrs	Client Info		500	1184	523
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Changed	None	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		17	18	8
Iron	ppm	ASTM D5185m	>151	64	76	40
Chromium	ppm	ASTM D5185m	>11	<1	1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>21	6	<1	1
Lead	ppm	ASTM D5185m	>51	0	<1	0
Copper	ppm	ASTM D5185m	>51	0	1	1
Tin	ppm	ASTM D5185m	>4	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	21	16	11
Potassium	ppm	ASTM D5185m	>20	1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	5	4
Boron	ppm	ASTM D5185m	400	78	64	55
Barium	ppm	ASTM D5185m	200	<1	0	6
Molybdenum	ppm	ASTM D5185m	12	13	109	97
Manganese	ppm	ASTM D5185m		2	5	4
Magnesium	ppm	ASTM D5185m	12	8	15	15
Calcium	ppm	ASTM D5185m	150	339	4292	3890
Phosphorus	ppm	ASTM D5185m	1650	1111	1186	1060
Zinc	ppm	ASTM D5185m	125	123	1362	1227
Sulfur	ppm	ASTM D5185m	22500	11322	9516	8551
Visc @ 40°C	cSt	ASTM D445	183	142	61.0	63.0

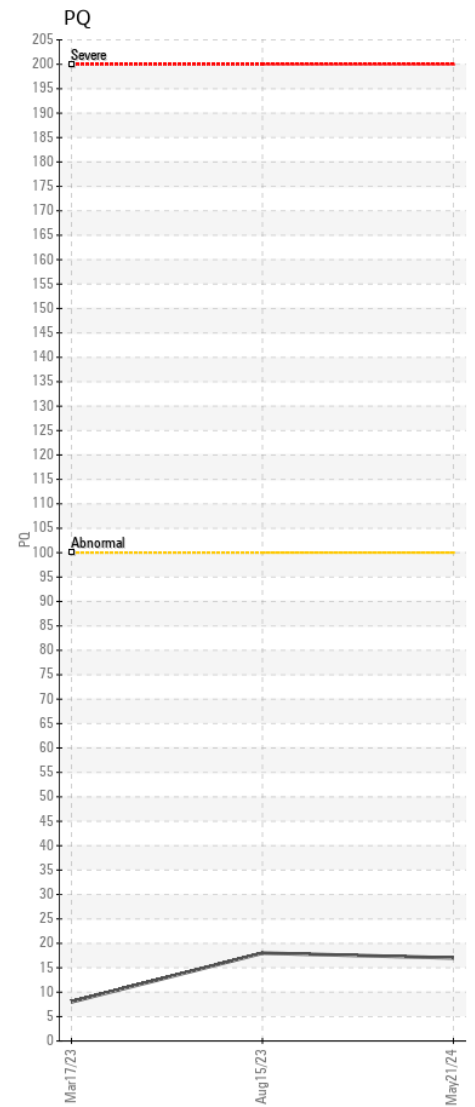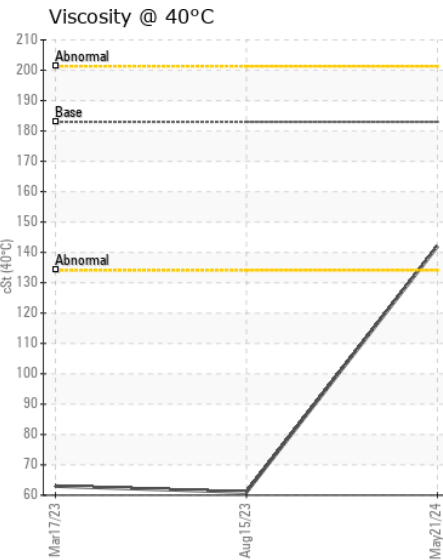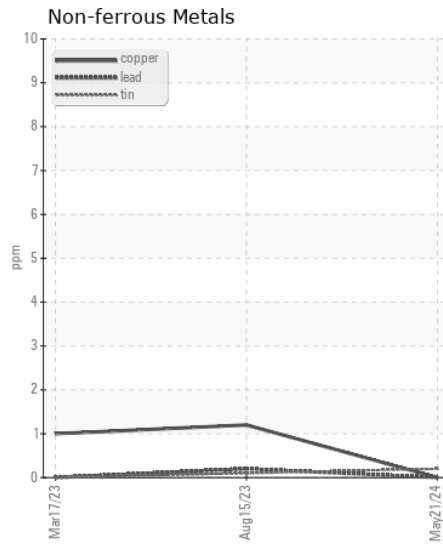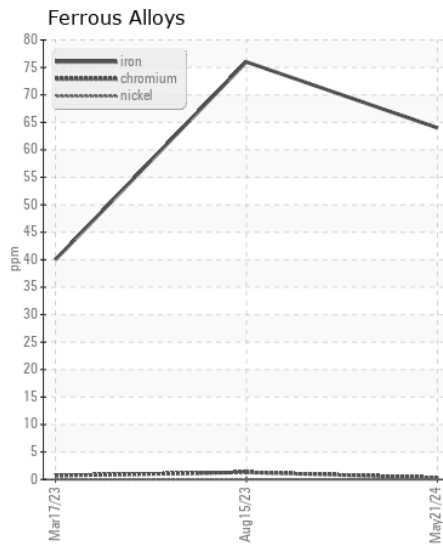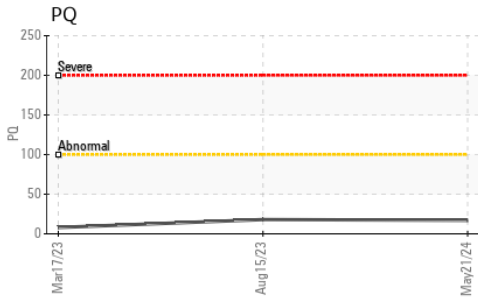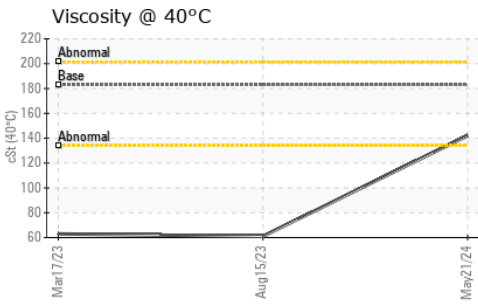

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048943 **Received** : 31 May 2024
Lab Number : 06197018 **Tested** : 03 Jun 2024
Unique Number : 11059141 **Diagnosed** : 03 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

LANE PIPELINE
 2946 E MAIN ST
 BRIDGEPORT, WV
 US 26330
 Contact: JESSE WILBURN
 jessewilburn@gmail.com
 T: (740)440-0927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)