



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 9 - Marietta
Machine Id
JOHN DEERE 700K 1T0700KXJDE248315
Component
Right Final Drive
Fluid
GEAR OIL SAE 90 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048951	LEC0042980	---
Sample Date		Client Info		22 May 2024	22 Sep 2023	---
Machine Age	hrs	Client Info		6097	5603	---
Oil Age	hrs	Client Info		500	500	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	54	62	---
Iron	ppm	ASTM D5185m	>750	188	87	---
Chromium	ppm	ASTM D5185m	>9	1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	16	2	---
Lead	ppm	ASTM D5185m	>15	0	0	---
Copper	ppm	ASTM D5185m	>40	0	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	69	34	---
Potassium	ppm	ASTM D5185m	>20	3	4	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	0	---
Boron	ppm	ASTM D5185m	400	236	194	---
Barium	ppm	ASTM D5185m	200	0	<1	---
Molybdenum	ppm	ASTM D5185m	12	3	2	---
Manganese	ppm	ASTM D5185m		2	1	---
Magnesium	ppm	ASTM D5185m	12	8	12	---
Calcium	ppm	ASTM D5185m	150	39	45	---
Phosphorus	ppm	ASTM D5185m	1650	1455	1318	---
Zinc	ppm	ASTM D5185m	125	20	30	---
Sulfur	ppm	ASTM D5185m	22500	28987	27920	---
Visc @ 40°C	cSt	ASTM D445	183	106	106	---

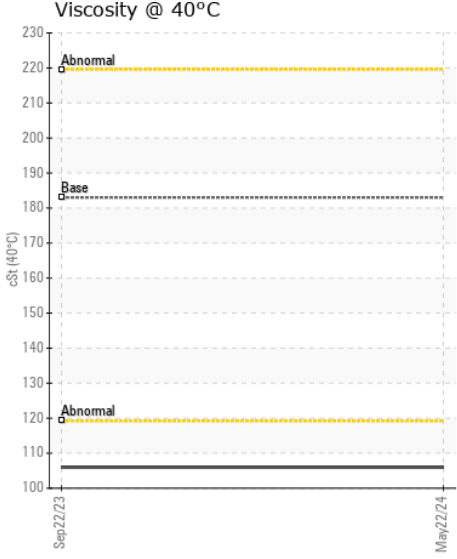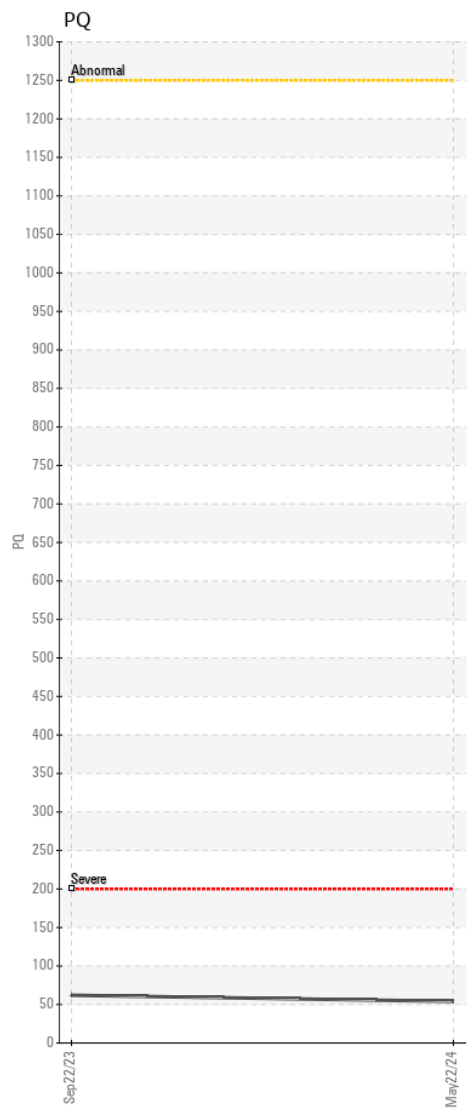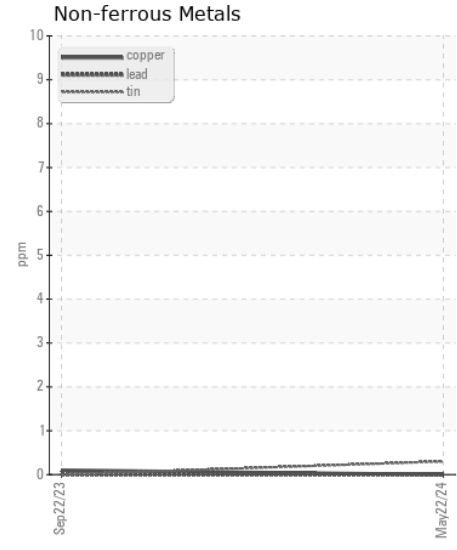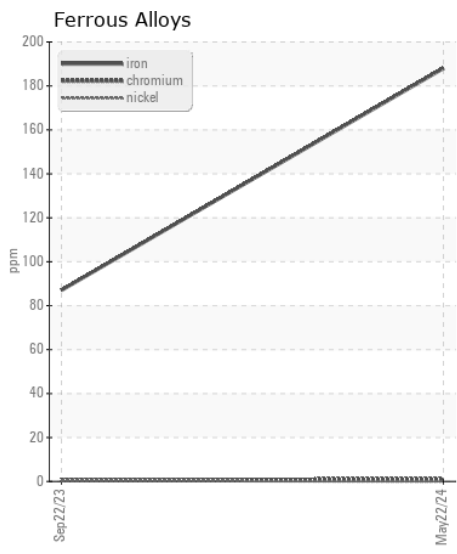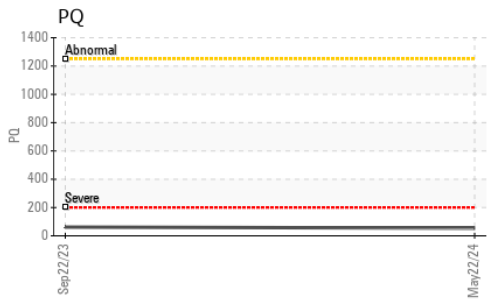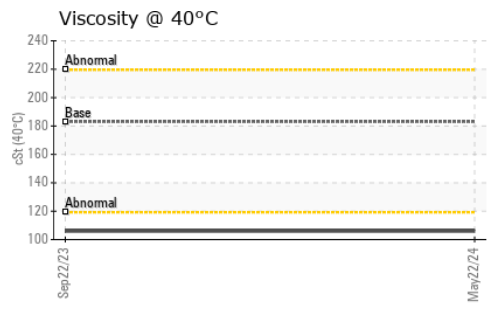

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048951 **Received** : 31 May 2024
Lab Number : 06197024 **Tested** : 03 Jun 2024
Unique Number : 11059147 **Diagnosed** : 04 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LANE PIPELINE
 2946 E MAIN ST
 BRIDGEPORT, WV
 US 26330

Contact: JESSE WILBURN
 jessewilburn@gmail.com
 T: (740)440-0927

F: