



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 117
 Component
Rear Differential
 Fluid
MOBIL MOBILFLUID 424 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0172400	JR0117805	JR0039644
Sample Date		Client Info		17 May 2024	07 Dec 2022	27 Sep 2022
Machine Age	hrs	Client Info		7263	3768	3209
Oil Age	hrs	Client Info		1263	1768	500
Filter Age	hrs	Client Info		263	768	500
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		22	7	11
Iron	ppm	ASTM D5185m	>500	60	7	50
Chromium	ppm	ASTM D5185m	>10	<1	▲ 10	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	1
Lead	ppm	ASTM D5185m	>25	26	<1	21
Copper	ppm	ASTM D5185m	>100	217	4	54
Tin	ppm	ASTM D5185m	>10	5	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	18	3	6
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	2	2
Boron	ppm	ASTM D5185m		116	7	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		8	<1	<1
Manganese	ppm	ASTM D5185m		1	0	1
Magnesium	ppm	ASTM D5185m		94	7	93
Calcium	ppm	ASTM D5185m		3492	371	3296
Phosphorus	ppm	ASTM D5185m		1217	687	978
Zinc	ppm	ASTM D5185m		1192	900	1137
Sulfur	ppm	ASTM D5185m		7843	2621	4079
Visc @ 40°C	cSt	ASTM D445	55	53.1	56.3	51.9


Viscosity @ 40°C

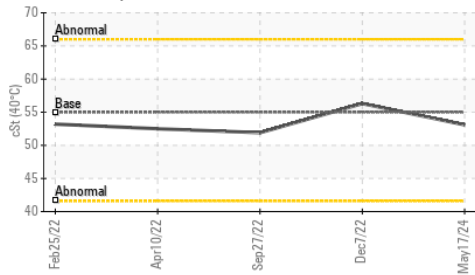


PQ

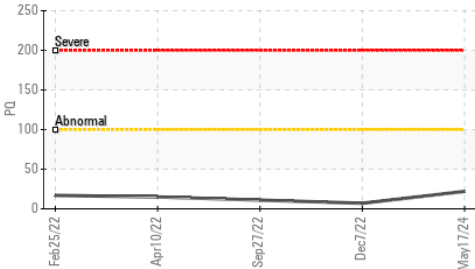


Ferrous Alloys

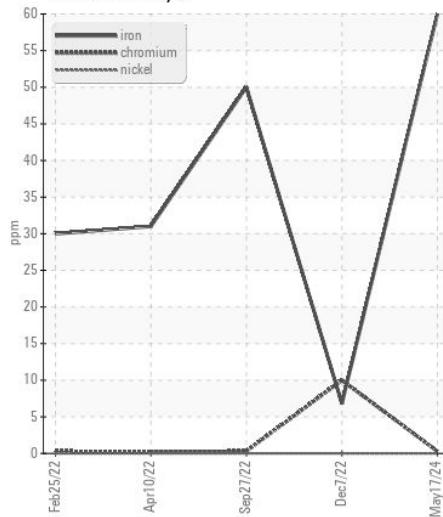


PQ

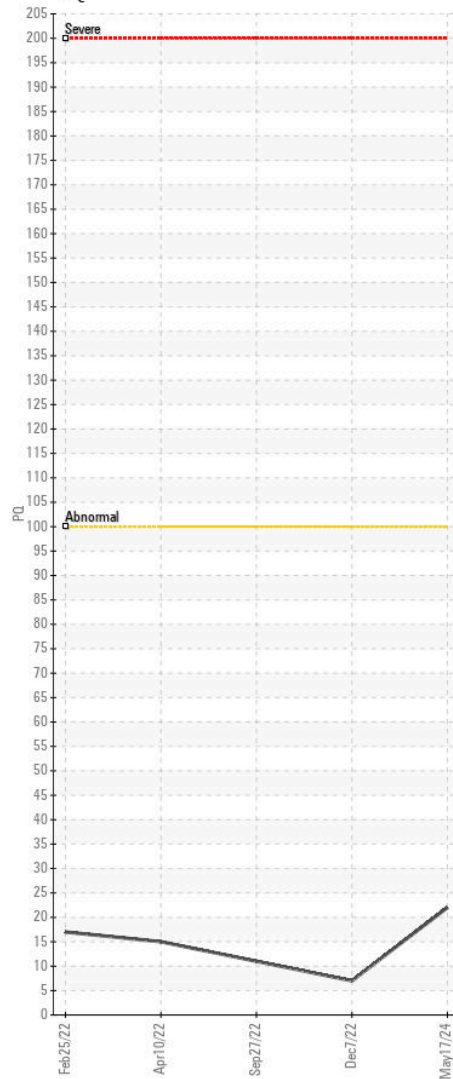

Non-ferrous Metals

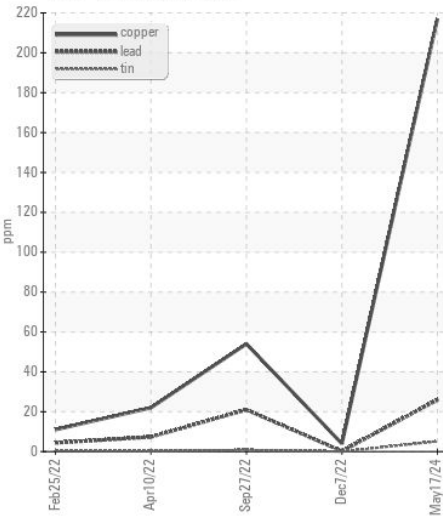

Viscosity @ 40°C

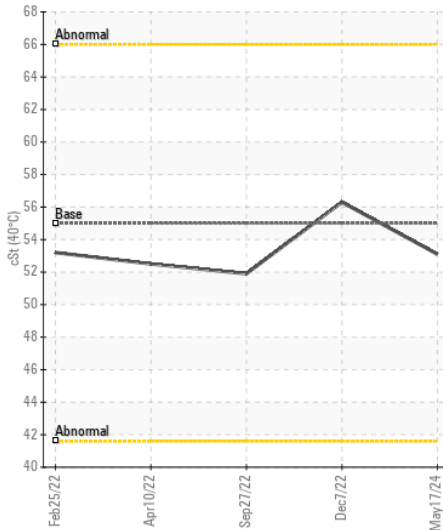

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0172400 **Received** : 31 May 2024
Lab Number : 06197039 **Tested** : 03 Jun 2024
Unique Number : 11059162 **Diagnosed** : 04 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

SCOTTS EARTH GROW
 7601 GENERAL MAHONE HWY
 WAVERLY, VA
 US 23890
 Contact: JW
 jerald.tappiii@scotts.com
 T: (804)834-3986
 F: (804)834-3989

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)